
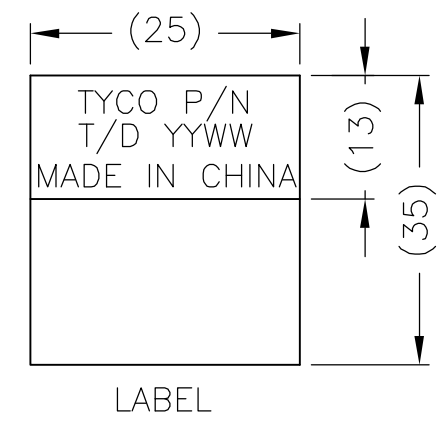


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			C	REVISE PER ECO-05-006320	01AUG05	TW	JH

Tooling Drawing NO.  
 USB A: TR00662

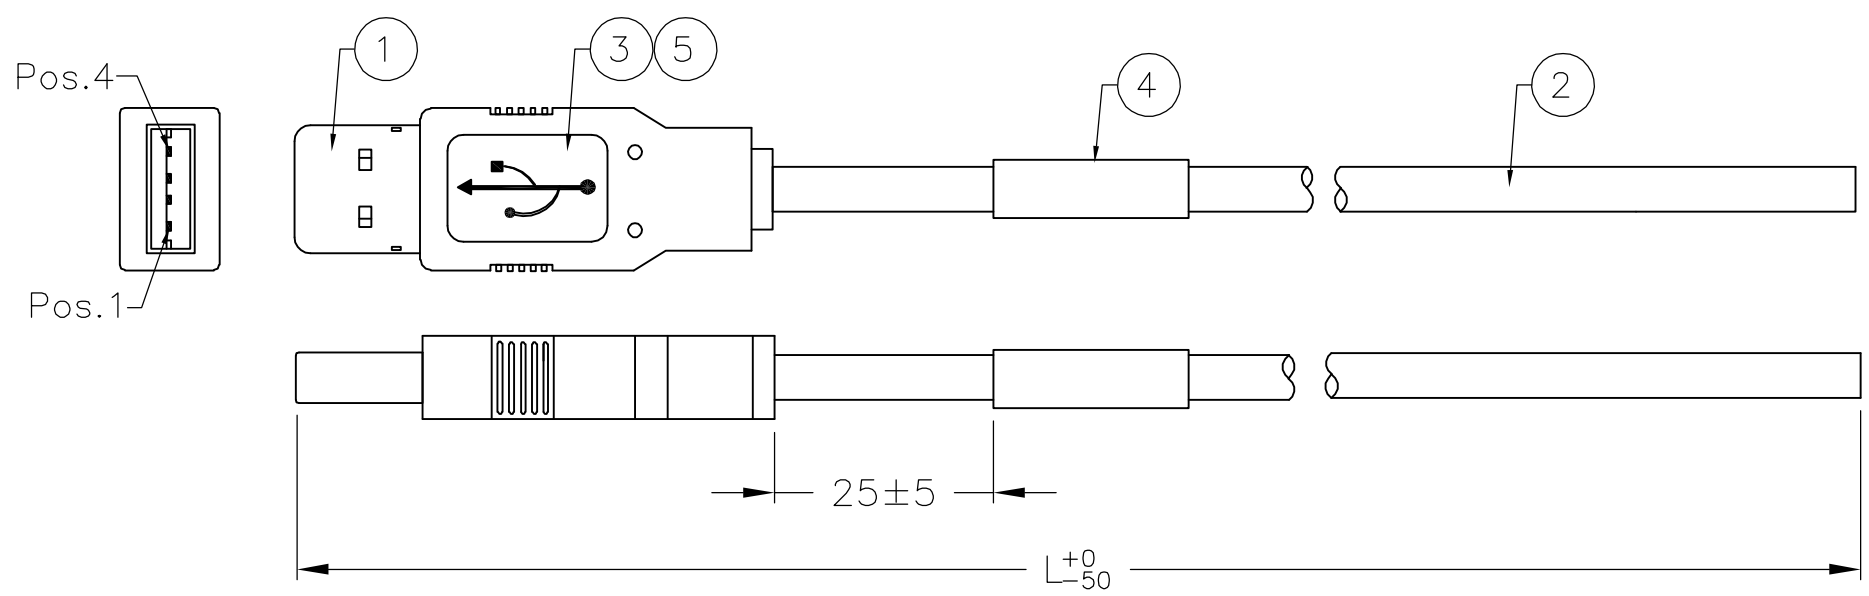

PIN ASSIGNMENT :

USB A	2	3	1	4	Shell
	Pair 1				
	White(D-)	Green(D+)	Red(Vbus)	Black(Gnd)	Drain Braid
	NC	NC	NC	NC	NC

PART NO.	1487593-1	1487593-2
LENGTH(L)	2000	1500

- NOTES:
- TESTED FOR CONTINUITY, SHORTS AND OPENS, HI-POT 630V FOR 10MS.
  - CABLE ASSEMBLY MEETS USB 2.0 STANDARDS.
  - EXPOSED CABLE BRAID IS NOT PERMISSIBLE BEYOND OVERMOLD.
  - THE FINAL CABLE ASSEMBLY MAXIMUM LENGTH NOT TO EXCEED 2700MM PER USB SPECIFICATIONS.
  - MEETS REQUIREMENTS OF EU DIRECTIVE 2002/95/EC

AR	AR	MR	COPPER FOIL, W: 5MM	5
1	1	PC	LABEL, 25x35mm, White 25x13mm	4
AR	AR	KG	Overmold PVC, 40P, Color: White(WH01)	3
AR	AR	MR	USB 2.0 Cable 28AWG*1P+24AWG*2C+Al/Mylar +Drain+Braid, Color: White(WH01).	2
1	1	EA	USB 4Pin Connector Contacts: Gold 30U Plated, Shell: Nickel Plated, Housing UL94V-0 A Type.	1
-2	-1	U/M	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	BOVEY LIU	25FEB02	 Tyco Electronics Corporation Harrisburg, Pa 17105-3608
DIMENSIONS: mm		CHK	J.HUNT	25FEB02	
		APVD	J.HUNT	25FEB02	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		NAME	
0 PLC ± -		-		CABLE ASSEMBLY, USB A TYPE TO NC	
1 PLC ± -		-		-	
2 PLC ± -		APPLICATION SPEC		-	
3 PLC ± -		-		-	
4 PLC ± -		-		-	
ANGLES ± -		WEIGHT		-	
FINISH		-		-	
MATERIAL		-		-	
-		-		-	
CUSTOMER DRAWING				SCALE	N.T.S
-				SHEET	1 OF 1
-				REV	C