

TDS-08

**FEATURES**

※3-state setting


**APPLICATION**

- ※Remote control
- ※Home automation
- ※Telecommunication


**SPECIFICATION**

Contact Rating	25mA, 24V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	500V AC/1 minute
Operating Force	1,000gf max.
Travel	1mm
Operating Life	2,000 cycles
Operating Temp.	-20°C ~ +70°C
Storage Temp.	-40°C ~ +85°C

**HOW TO ORDER**

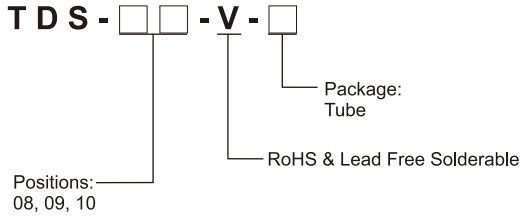


**CIRCUIT**

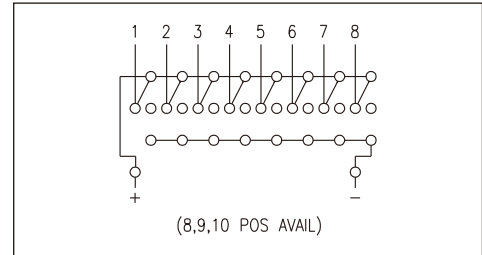



**PACKAGE**

<Tube>  
TDS-08: 19 pcs  
TDS-09: 17 pcs  
TDS-10: 16 pcs

**TDS**

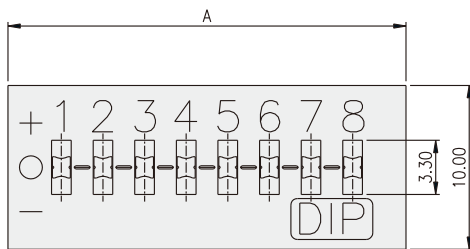

PART NO.	NO. OF POS.	DIM.A	DIM.B
TDS-08	8	24.30	17.78
TDS-09	9	26.84	20.32
TDS-10	10	29.38	22.86

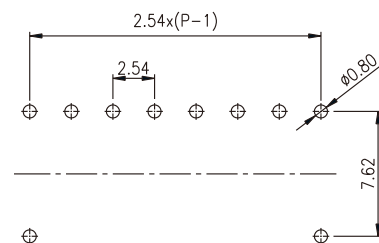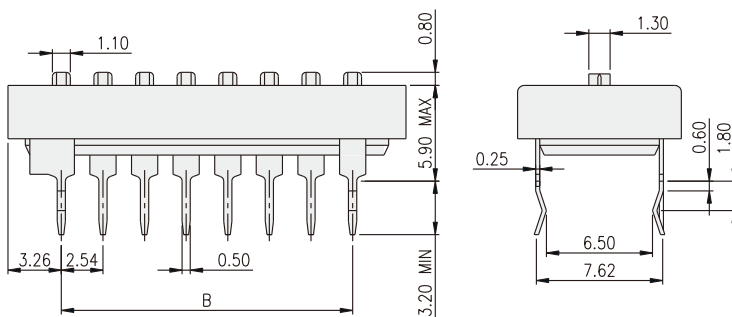

P.C.B. LAYOUT

DIP SWITCH