



DIMENSIONS:

A	4.500" ±0.063
B	3.580" ±0.125
C	3.750" ±0.063
D	3.750" ±0.063
E	2.750" ±0.063
F	3.312" ±0.063
G	0.203" X 0.375" ±0.015

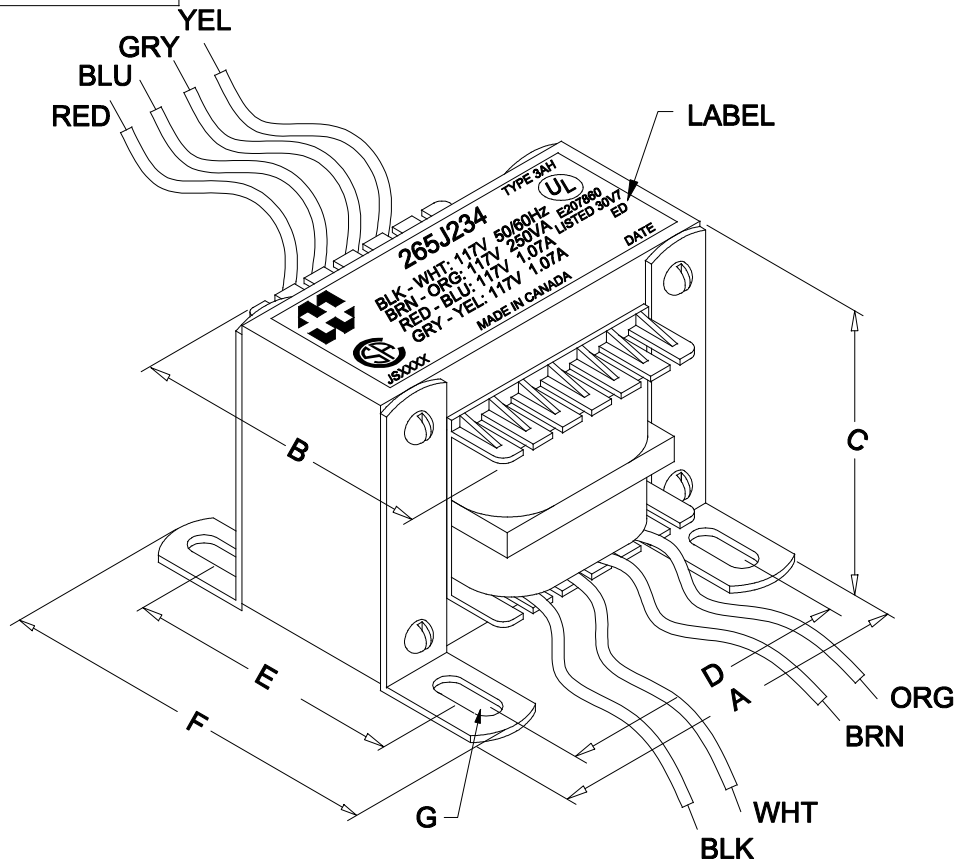

NOTE: ALL LEADS 9.0" OUT MIN.



FOR 234V:
CONNECT WHT & BRN

FOR 117V:
CONNECT ORG & WHT,
BRN & BLK

FOR SERIES 234V @ 1.07A
CONNECT GRY & BLU

FOR PARALLEL 117V @ 2.14A
CONNECT YEL & BLU,
RED & GRY

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 117V, 60Hz, BLK - WHT	325mA	Max.
Sec. N.L.V	@ 117V, 60Hz, BLK - WHT		
	BRN - ORG =	117.0V	±2%
	RED - BLU =	122.2V	±2%
	GRY - YEL =	122.7V	±2%
DCR	@ 20°C, WHT - BLK =	1.884 Ω	±20%
	@ 20°C, BRN - ORG =	2.244 Ω	±20%
	@ 20°C, RED - BLU =	1.964 Ω	±20%
	@ 20°C, GRY - YEL =	2.365 Ω	±20%
HIPOT	PRIMARY - SECONDARY	4000V, 60Hz, 1 SEC	

HAMMOND
MANUFACTURING

ELECTRONIC DIVISION

52 RANKIN PLACE,
WATERLOO, ONTARIO, N2J 3Z5

PH # (519) 886-6181
FAX # (519) 886-9540

DWG. BY: C. ILIE
DATE: 12/23/13

CHK'D BY:
APP'D. BY:
DIMENSIONS: IN(X) MM()

TITLE: POWER
TRANSFORMER

DWG. NO.
265J234

REV.#	REVISION	DATE
0	RELEASED. C.I.	12/23/13