

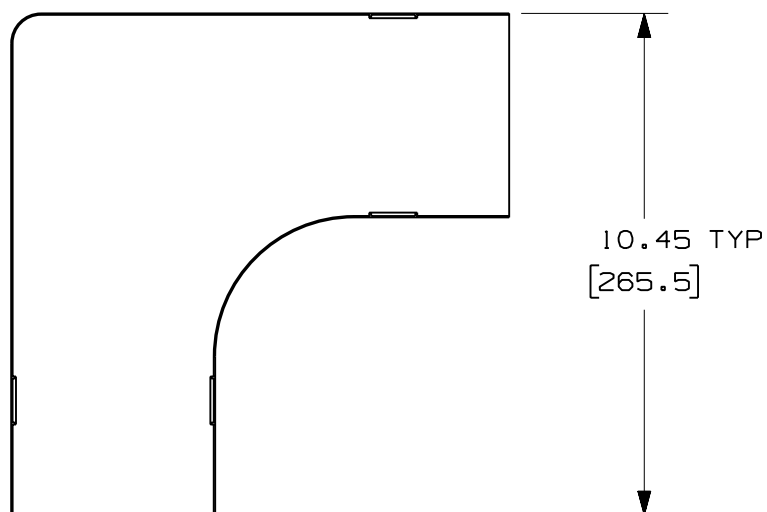
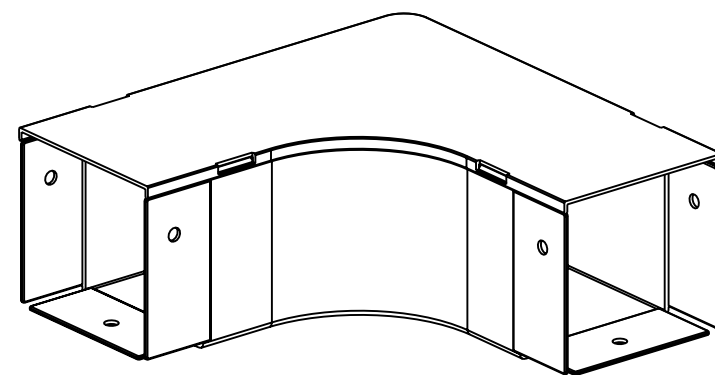


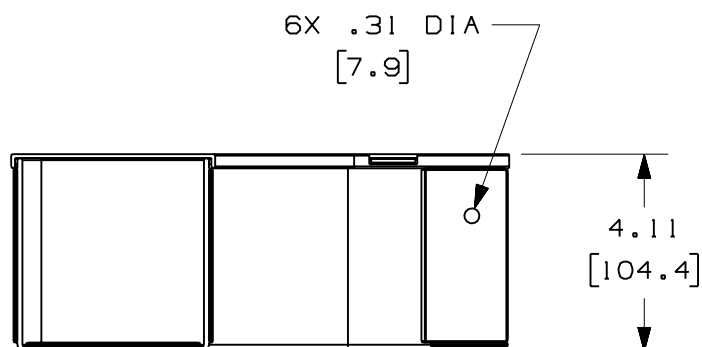

NOTES:

1. SEE CURRENT CATALOG FOR ADDITIONAL PART SUFFIXES TO INDICATE COLOR AND/OR PACKAGE QUANTITY.
2. THE FIBER-DUCT 4x4 HORIZONTAL RIGHT ANGLE FITTING IS DESIGNED WITH A MINIMUM 2" (50.8) BEND RADIUS TO PROTECT FIBER OPTIC CABLES.
3. DIMENSIONS IN PARENTHESES ARE IN METRIC.

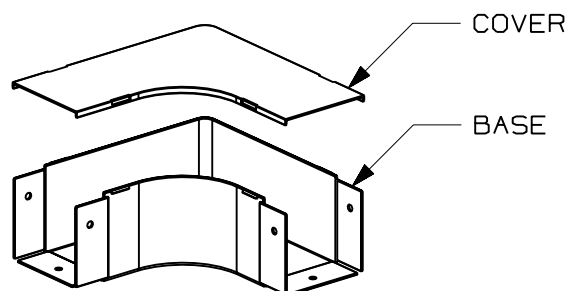

ENG. REF.: D35245CE_DC_FRA4X4_03.prt

CAD FILENAME/LAYERS

FRA4X4.pdf

PANDUIT CORP. TINLEY PARK, ILLINOIS
FIBER-DUCT 4x4 HORIZONTAL RIGHT ANGLE FITTING (FRA4X4)
 CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
 (.X) ± (.XXX) ±
 (.XX) ± .03 (.8) ANGLES ±
UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN IN
INCHES, THIRD ANGLE PROJECTION.

DRAWN BY

MAT'L:

JBA

DATE

4-2-97

CHK'D

CEF



ABS

SCALE

NONE

DRAWING NO.

35245-31

DWG

A

SIZE

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	GMBH
-	-----	---	--	J. REVISED GENERAL NOTES. I. REVISED PART WEIGHT.	-----	--	--		
-	-----	---	--	H. REVISED MATERIAL. G. REVISED DRAWING TITLE.	-----	--	--		
3	12-28-06	MSO	RN	F. REVISED CAD FILENAME. E. REVISED AND REDRAWN.	35245-31	RN	RN		