




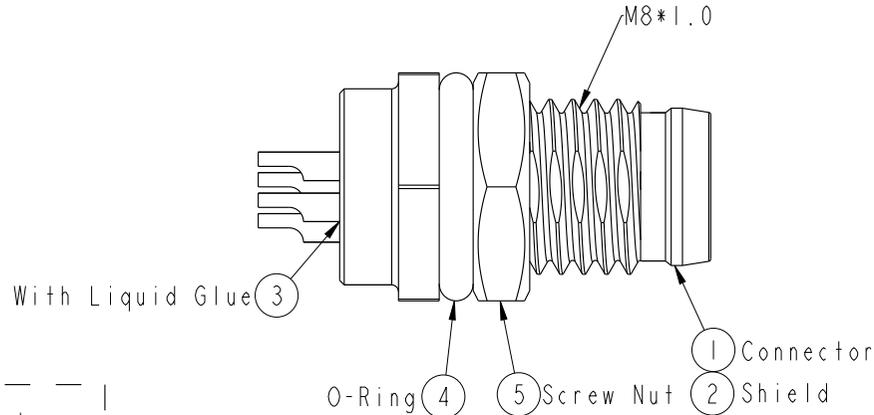


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

| REV. | ECN NO. | DATE | SIGN | DESCRIPTION |
|------|---------|------|------|-------------|
| | | | | |
| | | | | |
| | | | | |

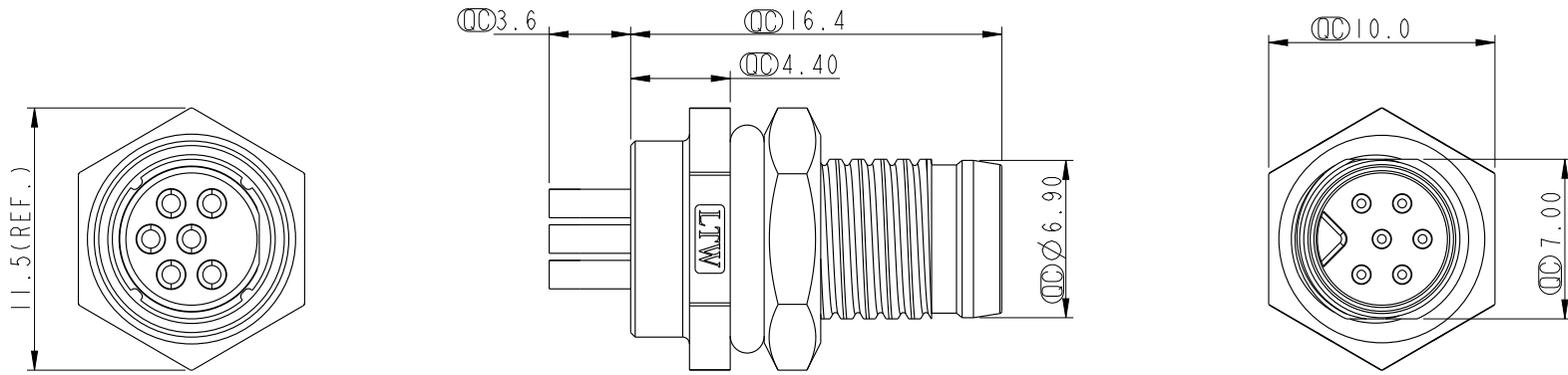

Pin Assignment
Front View



Recommended
Panel Cut-Out

- Note:
- * ⌀ Important Dimension.
 - * Waterproof Rate: IP67.
 - * Housing: Nylon+GF, Black.
 - * Male Pin: Copper Alloy, Gold Plated.
 - * Shield: Zinc Alloy, Nickel Plated.
 - * Screw Nut: Copper Alloy, Nickel Plated.
 - * O-Ring: EPDM, Black.
 - * For Panel Thickness Max 3.0mm.
 - * Nut Torque: 4~6 kgf.cm.

| | | |
|-----------|-------|--|
| UNIT:mm | | |
| TOLERANCE | ±0.25 | |
| .X | ±0.1 | |
| .XX | ±0.05 | |
| .XXX | ±1° | |
| ANGLES | | |

| | | | |
|--------------------------------------|----------------|--------------------|--|
| TITLE M8 6Pin Panel M Conn. M Pin | | | |
| SCALE 3:1 | SIZE A4 | SHEET 1 OF 1 | |
| REV. A | WC-REV. A.3 | ⌀: Inspection item | |

Amphenol LTW
安費諾亮泰企業股份有限公司

| | | |
|-----------------------------|----------------------|--------------------|
| ITEM NO 8A-06PMMS-SF7001 | DRAWN BY Mila | DATE 2013-12-19 |
| DWG NO 8A-06PMMS-SF7001 | CHECKED BY Jimmy | DATE 2013-12-19 |
| CUSTOMER ALTW | APPROVED BY Jerry | DATE 2013-12-19 |

A B C D E F