

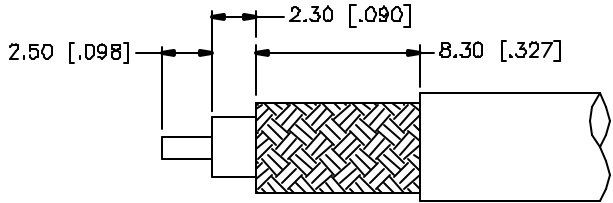
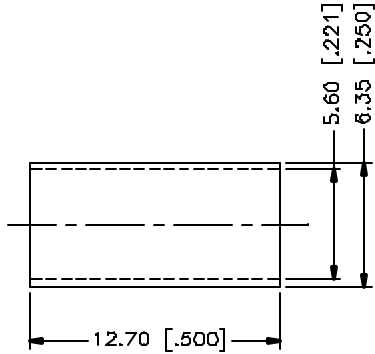


REV.	DATE	DESCRIPTION
NC	02/13/98	INITIAL RELEASE
A	05/01/04	UPDATE DRAWING FORMAT



RECOMMENDED CABLE
STRIPPING DIMS.

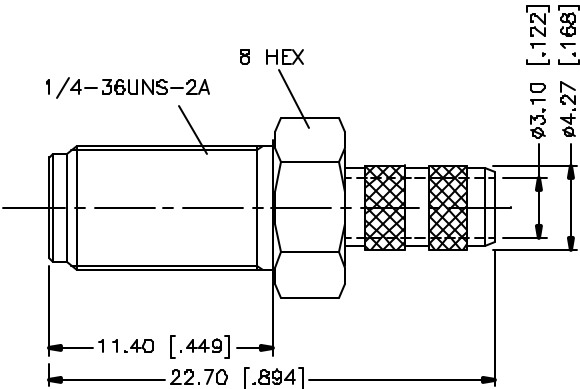

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN () ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex			
8						DRAWN	G.R.S.	05/01/04					
7						CHECKED							
6						ISSUED				PART DESCRIPTION SMA CRIMP JACK (FOR 223/U CABLE)			
5						SHEET	1 OF 1						
4	FERRULE	COPPER	GOLD	1	DWG. NO. 132197.DWG		REV. A		SIZE A		SCALE NA		
3	CONTACT PIN	BER. COPPER	GOLD	1									
2	INSULATOR	TEFLON	NATURAL	1									
1	BODY	BRASS	GOLD	1	C:/132/132197.DWG								
	DESCRIPTION	MATERIAL	FINISH	QTY									