
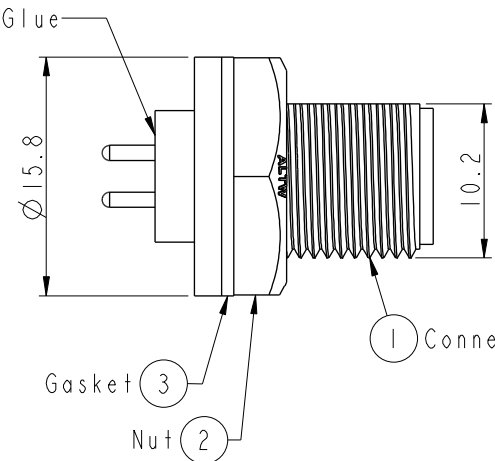
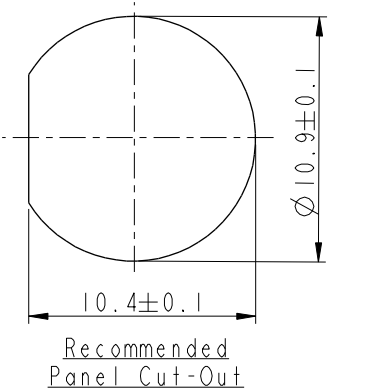

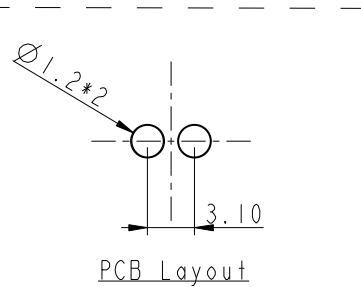

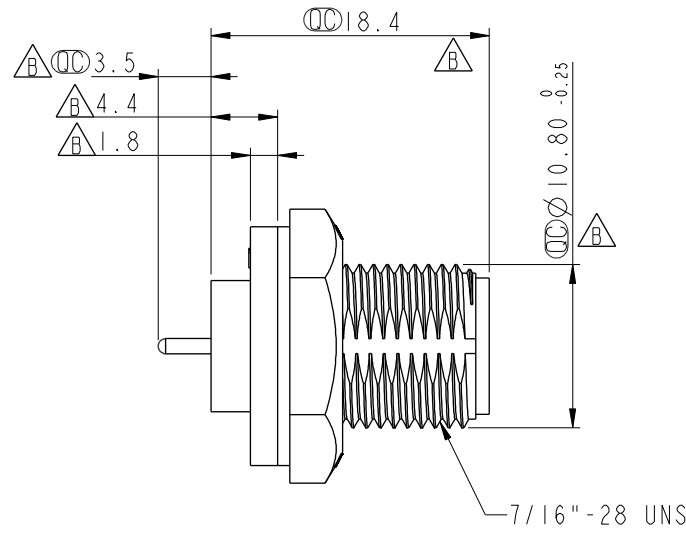
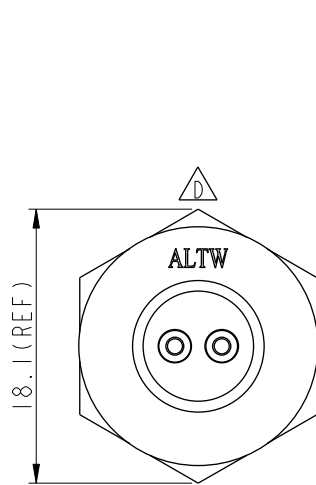


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN-8A0092	2008/09/15	Shin	Add Notes
D	LEN1640060	2016/03/30	Vicky	Update Logo
E	CI90268	2019/02/18	Ruru	Modify Note



- Note: 
- *  Important Dimension
 - * Waterproof Rate: IP67, Unmated
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Nut: Thermoplastic, Black
 - * Gasket: Rubber, Black
 - *  Use with waterproof cap or dust cap
Panel thickness max: 4.0mm
 - *  Use without waterproof cap or dust cap
Panel thickness max: 5.0mm
 - * Gasket and Nut are packed separately in PE bags.

UNIT:mm		TITLE		Amphenol LTW		ITEM NO	DRAWN BY	DATE
		Mini Panel Screw 2Pin M Conn. M Pin		安費諾亮泰企業股份有限公司		AD-02PMMP-SC7001	Ruru	2019-02-18
TOLERANCE		SCALE	SIZE	SHEET	OF	DWG NO	CHECKED BY	DATE
.X ±0.25		2:1	A4	1	1	AD-02PMMP-SC7001	Rita	2019-02-18
.XX ±0.1		REV.	WC-REV.	QC: Inspection item		CUSTOMER	APPROVED BY	DATE
.XXX ±0.05		E	A.2			ALTW	Max	2019-02-18
ANGLES ±1°								