


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	V3	REVISED PER ECO-14-008433	05JUN2014	NK	MZ
	W	REVISED PER ECR-16-016563	07DEC2016	RS	MZ

D


C

B

A

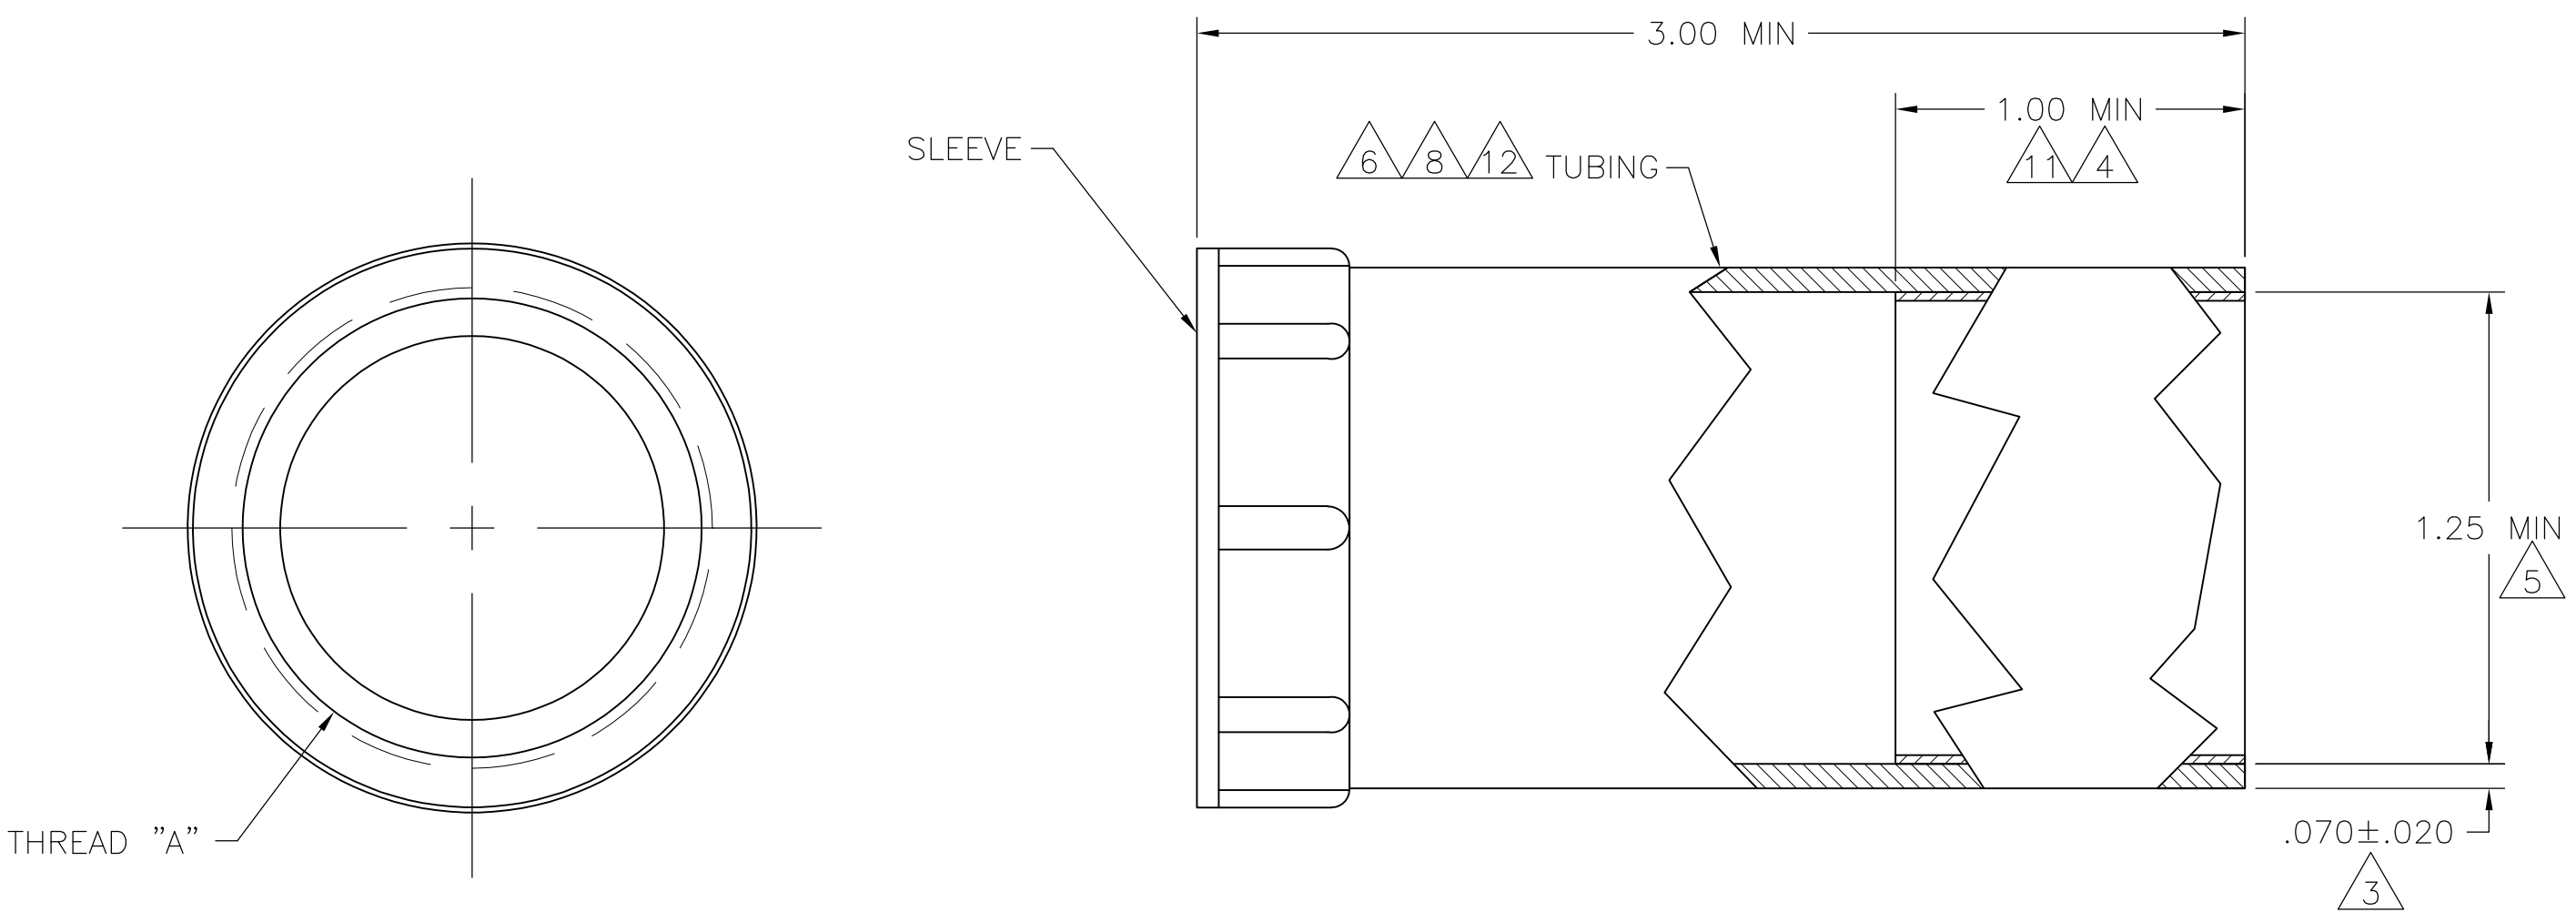

- 1 POLYOLEFIN, BLACK.
- 2 NYLON, BLACK.
- 3 NOMINAL WALL THICKNESS, EXPANDED.
- 4 LENGTH OF SEALANT.
- 5 EXPANDED INSIDE DIAMETER.
- 6 12.70[.500] MAXIMUM RECOVERED INSIDE DIAMETER.
- 7 ASSEMBLY WILL PASS 0.0703 KG PER SQ CENTIMETER [ONE POUND PER SQ IN.] WATER PRESSURE TEST.
- 8 121°C [250°F] SHRINK TEMPERATURE.
- 9 -55°C TO 110°C [-67°F TO 230°F] OPERATING TEMPERATURE.
- 10 THIS PART WILL ACCOMODATE $\varnothing 13.97 - \varnothing 31.75$ [$\varnothing .550 - \varnothing 1.250$] CABLE RANGE.
- 11 NO SEALANT APPLIED.
- 12 ACTUAL SHAPE MAY VARY DUE TO PROCESS VARIANCE.
- 13 OBSOLETE PARTS.
- 14 SEE P/N CHART FOR MARKING. WHITE CHARACTERS .15 MIN HIGH AND LOCATED ON THE OUTSIDE SURFACE OF THE TUBING.
- 15 PRELIMINARY PART - NOT FOR PRODUCTION

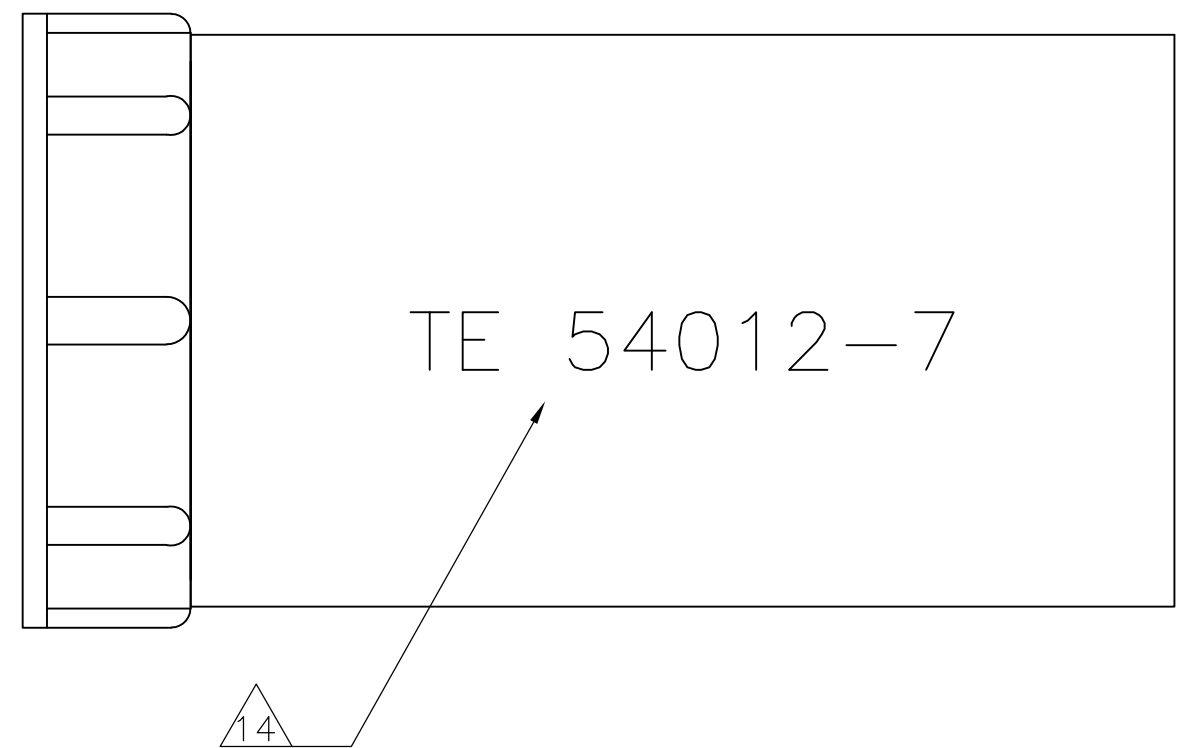

MARKING DETAIL

13	TE 54012-7	1 3/8-18 UNEF-2B	54012-7
11 13	NONE	1 7/16-18 UNEF-2B	54012-6
11 13	NONE	1 3/8-18 UNEF-2B	54012-5
	NONE	1 7/16-18 UNEF-2B	54012-4
13	NONE	1 3/16-18 UNEF-2B	54012-3
	NONE	1 3/8-18 UNEF-2B	54012-1
MARKING		THREAD "A"	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	10 APR 96	TE Connectivity			
		CHK	15 APR 95				
DIMENSIONS: INCHES		APVD	03 MAY 96	NAME			
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		STRAIN RELIEF ASSY, SHELL SIZE 23, CPC			
		0 PLC ± -		SIZE			
MATERIAL		1 PLC ± -		CAGE CODE		DRAWING NO	
		2 PLC ± -		A2 00779		C=54012	
TUBING: 1		3 PLC ± -		SCALE		SHEET	
SLEEVE: 2		4 PLC ± -		2:1		1 of 1	
		ANGLES ± -		CUSTOMER DRAWING		REV	
		FINISH -				W	