




# MARKETING SALES DRAWING

**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**  
**DIMENSIONS IN METRIC - [ ]**

This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.



**Electrical Testing**  
**per Tusonix standard**  
**test plans and Mil-Std-202**  
**Test Methods.**

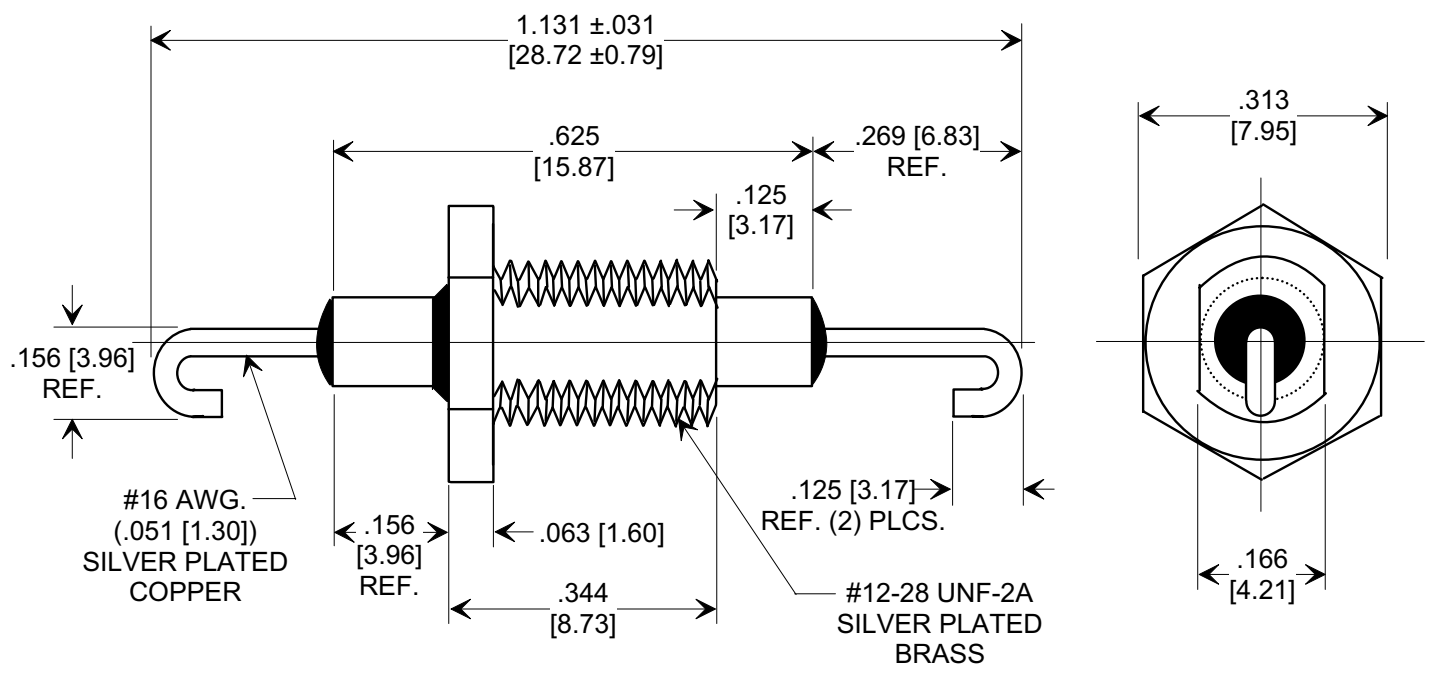

SPECIFICATIONS	
CAPACITANCE	2300 pF
CAP. TOL.	+ 80, -20%
TEMP. COEF.	X5U
WORKING VOLTAGE	500 VDC @ +85°C
TEMP. RANGE	-55°C TO +85°C
CURRENT (A)	20
I.R. MIN. @ 100 VDC	10 G Ω
DWV @ 2 SEC. MIN.	875 VDC

- NOTES:
- TUSONIX STANDARD PART NUMBER: 357-000-X5U0-232Z.  
 TUSONIX RoHS COMPLIANT PART NUMBER:  
 357-000-X5U0-232Z LF.  
 CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
  - PART MARKING: COLOR CODE DOTS, CAPACITANCE AND TEMP. CHAR. ON TOP OF BUSHING HEX.  
 RoHS PART: WITH ADDITIONAL GREEN DOT ON TUBE AS IDENTIFIER..
  - SUPPLIED WITH SILVER PLATED HEX NUT.

X-2015 Rev-0 <b>REVISION RECORD</b> Original Release C.O. 19990106-1-01 ADDED METRIC, CURRENT, IR, DWV & ORIENTATION. SILVER PLATED WAS TINNED. S.M. 02-24-03 20030225-2-01 ADDED NOTES 1 & 2. S.M. 02-17-06 20060202-9-02	0	--TOLERANCES-- Unless Otherwise Specified	Title <b>BUSHING TYPE FEED-THRU CAPACITOR</b>		
	1		DECIMAL ± .015 [0.38]	Drawn S.M. 01-08-99 Scale 4 X	
	2	ANGLES ±	Approved J.Mc. 01-08-99		
	<b>TUSONIX</b> TUCSON, ARIZONA		A	<b>357-000-X5U0-232Z</b>	