


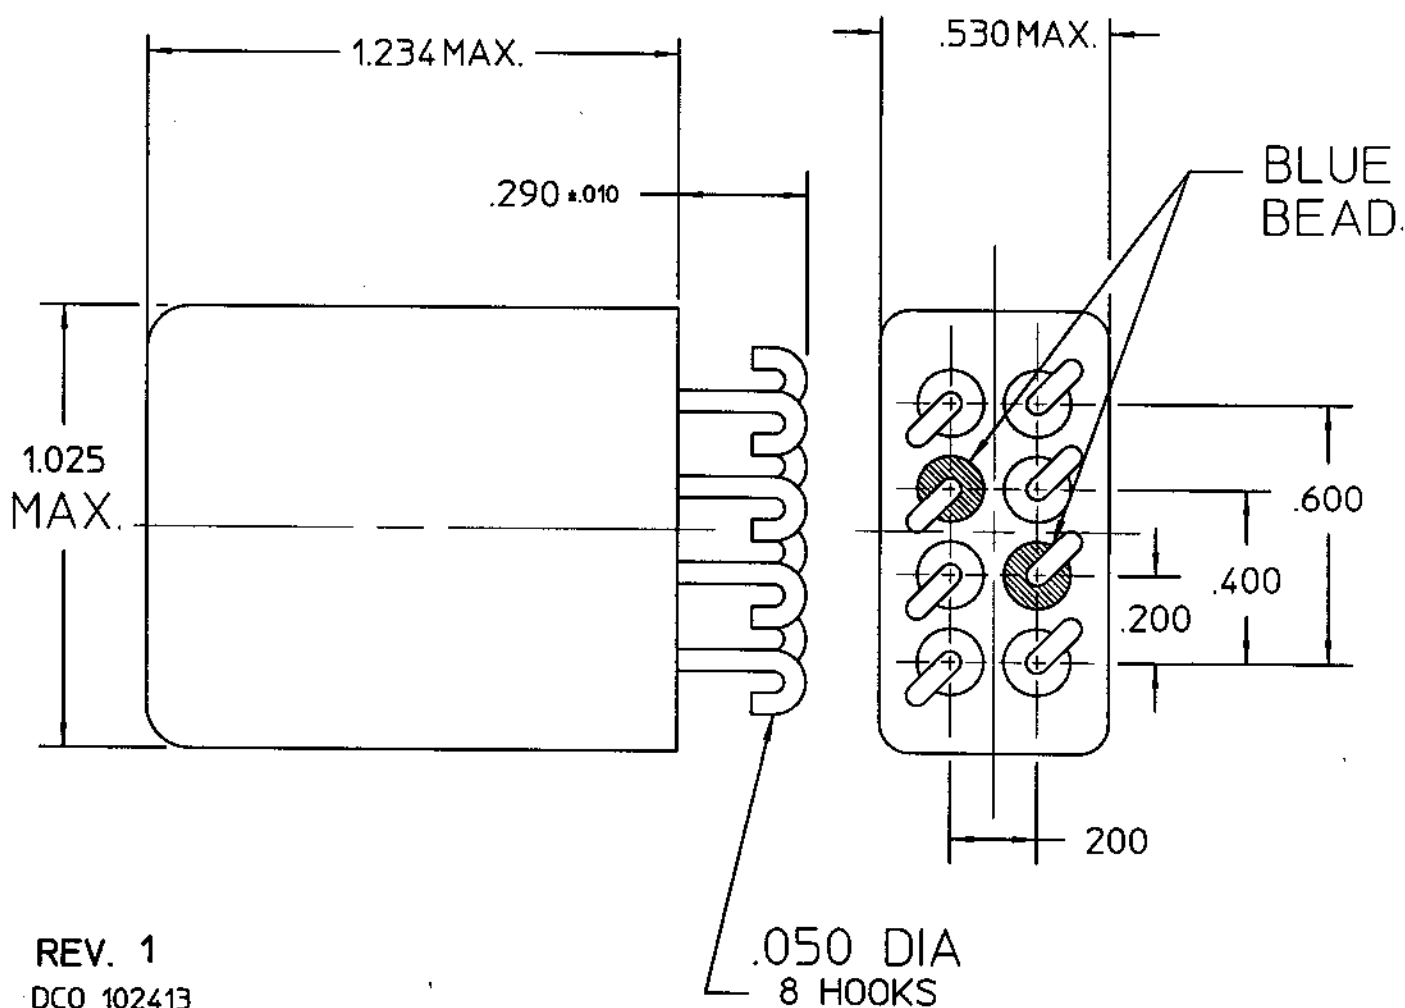

REV. 1

DCO 102413

COIL: @ 25°C
 RESISTANCE 7600 OHMS ±10%
 NOMINAL VOLTAGE 115.0 VAC (60-400 HZ)
 MUST OPERATE 72.0 VAC (60-400 HZ)
 MUST RELEASE 10.0 VAC MIN. (60-400 HZ)

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS @ 20 g's
 SHOCK 100 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 15 MS MAX.
 RELEASE TIME 20 MS MAX.
 CONTACT BOUNCE 5 MS MAX.

CUST. C.I.I. STD.
 CUST. NO. REV.

07 RELAY

CUSTOMER DATA SHEET

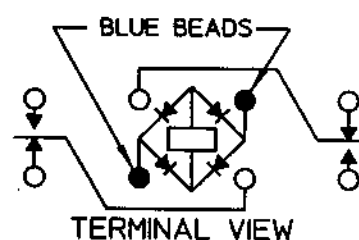

CONTACT RATING: 3 AMPS 115 VAC.
 60 HZ RESISTIVE 50,000 OPERATIONS
 5 AMP 115 VAC 400 HZ RESISTIVE
 50,000 OPERATIONS

DR. B.D. 11/18/99 CK. TLG 7-31-00

COMMUNICATIONS
 INSTRUMENTS, INC.

B07B042AS1