







All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor.
Property of FCI. Copyright FCI.

Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du proprietaire.
Propriete de c FCI. Droits de reproduction FCI.

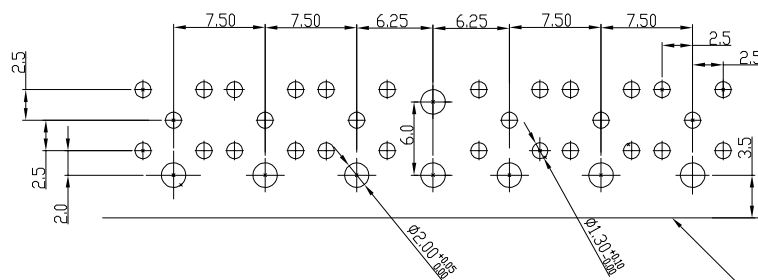

LAY-OUT
P.C.B.- HOLE

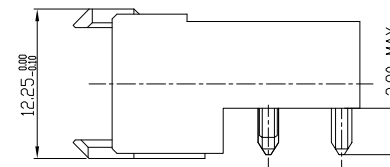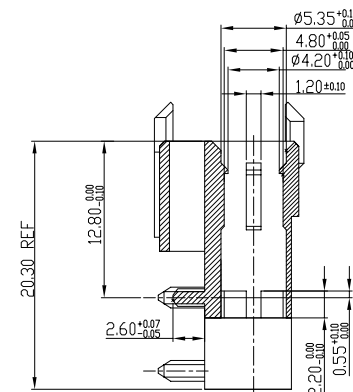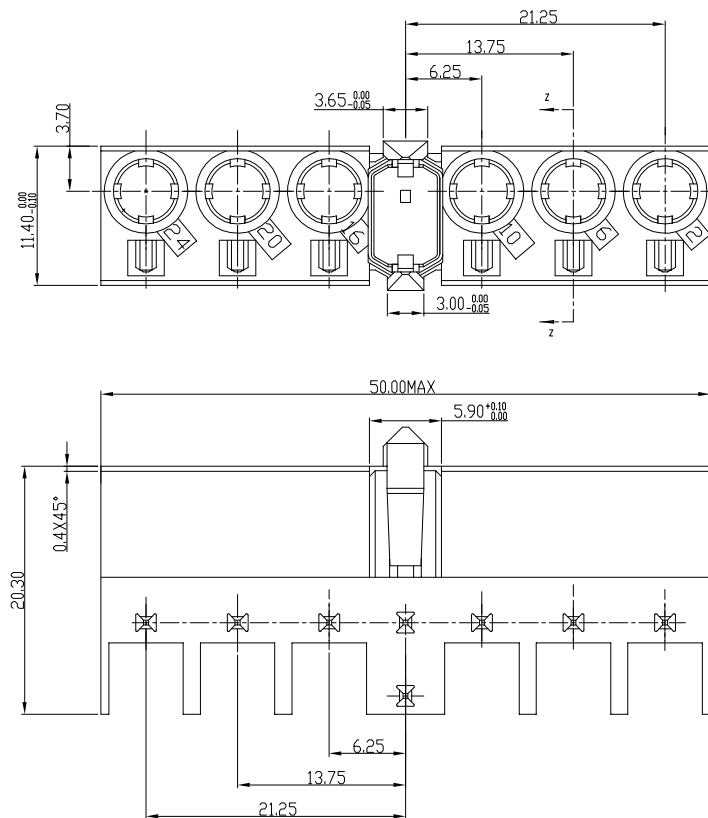

NOTES

1. THIS PRODUCT IS CSA APPROVED.
2. THIS PRODUCT IS UL RECOGNIZED.
3. MATERIAL: PLOYESTER 30% GLASS FILLED REINFORCED.
4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
5. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 30 SECONDS IN A VAVE SOLDER APPLICATION WITH A 1.6MM MINIMUM THICK CIRCUIT BOARD

rev	ecn no	dr	date
A	CONVERSION REVISION 05	KN	14-09-01
B	DG05-0333	Kasor	16-09-05
C	DG07-0011	Kasor	11-01-07

Material PLOYESTER 30% GLASS FILLED			Spec ref				
Mat code			✓	tolerance 1DEC±0.2 1DEC 2DEC ± 0.10 2DEC ANGLES±1°DIEKEN	projection 		
Heattreat							
Plating/Finish							
Dr	W.Panis	07-04-92			size	A4	Scale 1.500
Eng			Product family		MILLIPICS		
Chr			Model Name		ECN		
Appr			Model Revision		REL Level		
		title MILLIPACS 2/FEMALE BODY/TYPE L			dwg no BSC201418004		Rev C
Pro/E file	catalog no	HM2R04P1LF		CUSTOMER		sheet 1 of 1	

D