
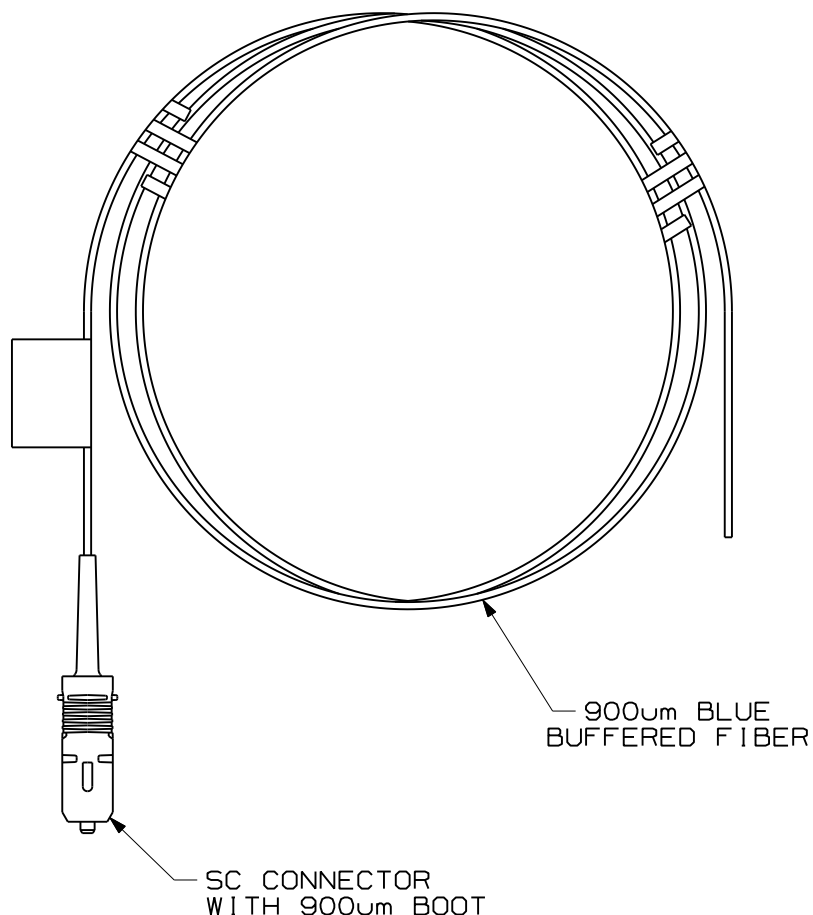




NOTES:

1. SEE SHEET 2 FOR PRODUCT DESCRIPTIONS AND TECHNICAL SPECIFICATIONS.
2. SEE CURRENT CATALOG FOR PATCH CORD LENGTHS AND PACKAGE QUANTITIES.
3. FOR LENGTHS OTHER THAN THOSE LISTED IN CATALOG, CONTACT YOUR PANDUIT SALES PERSON.
4. TESTED TO EIA/TIA 568-B.3.
5. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.

										900um BUFFERED NETKEY FIBER OPTIC SC PIGTAIL CUSTOMER DRAWING			
											 PANDUIT TM CORP. TINLEY PARK, ILL 60477		
										 THIRD ANGLE PROJECTION	ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED.		DRAWING FILENAME M01302CU_DC/00A
									DIMENSIONAL TOLERANCES ARE: (.X) (.XXX)±.010 (.0.3) (.XX)±.03 (.0.8) ANGLES		SCALE NONE		
									DRAWN BY EFK		MATERIAL	PART NO. NKF•BNO13-NM••	
									DATE 12-15-09		DRAWING NO. 01302-56 SHEET 1 OF 2	SIZE A	
R	12-15-09	EFK		RELEASED TO PRODUCTION	01302-56								
REV	DATE	BY	CHK	DESCRIPTION	ECN	- R	CUST	SUP	OTH	CHK'D			

900um BUFFERED SC PIGTAIL						
PANDUIT PART NUMBER	LENGTH (**) M = METERS	CABLE		CONNECTORS		
		FIBER TYPE	COUNT	BOOT COLOR	MAX. IL	MIN. RL
NKF6BN013-NM**	01, 02, 03	62.5/125 OM1	SIMPLEX 900um BUFFER	WHITE	0.75dB	26dB
NKF5BN013-NM**		50/125 OM2		BLACK		
NKFXBN013-NM**		50/128 OM3		AQUA		
NKF9BN013-NM**		SINGLEMODE OS1		WHITE		40dB

[illegible]