



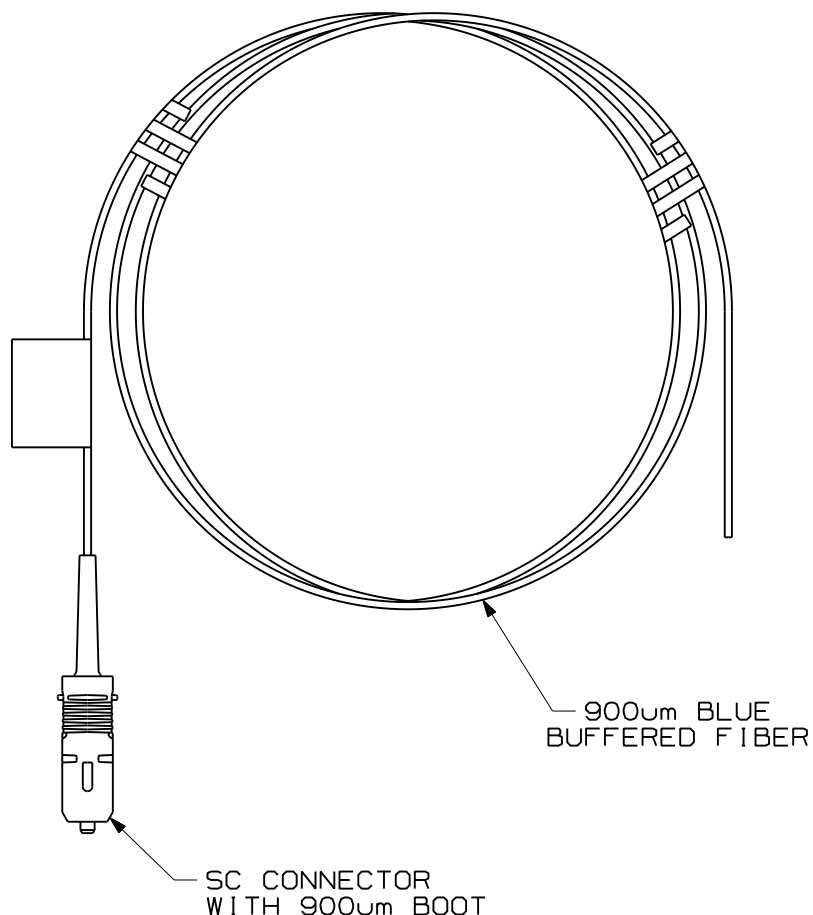

NOTES:

1. SEE SHEET 2 FOR PRODUCT DESCRIPTIONS AND TECHNICAL SPECIFICATIONS.
2. SEE CURRENT CATALOG FOR PATCH CORD LENGTHS AND PACKAGE QUANTITIES.
3. FOR LENGTHS OTHER THAN THOSE LISTED IN CATALOG, CONTACT YOUR PANDUIT SALES PERSON.
4. TESTED TO EIA/TIA 568-B.3.
5. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.

										900um BUFFERED NETKEY FIBER OPTIC SC PIGTAIL CUSTOMER DRAWING				
											 TINLEY PARK, ILL 60477			
											 THIRD ANGLE PROJECTION	ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED.		DRAWING FILENAME M01302CU_DC/00A
												DIMENSIONAL TOLERANCES ARE: (.X) (.XXX)±.010 (.0.3) (.XX)±.03 (.0.8) ANGLES		SCALE NONE
												DRAWN BY EFK		MATERIAL
R	12-15-09	EFK		RELEASED TO PRODUCTION	01302-56					DATE 12-15-09	DRAWING NO. 01302-56 SHEET 1 OF 2		SIZE A	
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH	CHK'D				

