


## Micro Lead, 0.031 Jack to Jack

Individual lead for interconnecting SMD test clips to instrument Female...

### Description

Individual lead for interconnecting Micro Clip Test Clips and MiniFlex Clips to instrument. 0.8mm (.031") female jack on both ends. Connect a MicroClip Test Clip to an oscilloscope tip.

- Highly flexible Silicone lead wire
- Material: Brass, Gold Plt.

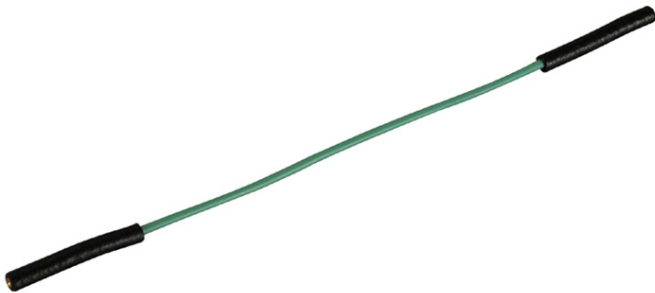

*Technical data subject to change.*

© Cal Test Electronics 2018.

[caltestelectronics.com](http://caltestelectronics.com)

All specifications apply to the unit after a temperature stabilization time of 20 minutes over an ambient temperature range of 25°C ± 5°C.

### **Specifications**

<b>IEC Rating</b>	33 Vac / 70 Vdc
<b>Current Max</b>	2 A
<b>Jacket Material</b>	Silicone
<b>Conductor Area</b>	0.22 mm <sup>2</sup>
<b>Wire Gauge</b>	24 AWG
<b>Stranding</b>	7 x 0.20 mm
<b>OD</b>	1.4mm (0.055")
<b>Temperature (degrees)</b>	-20 to +80C
<b>RoHS (2011/65/EU)</b>	Compliant

Specifications are subject to change without notice. To ensure the most current version of this manual, please download the current version from our website: [caltestelectronics.com](http://caltestelectronics.com)