






LOC	DIST	REVISIONS					
CM	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			AI	REVISED PER ECR-12-007353	18MAY2012	KH	TM

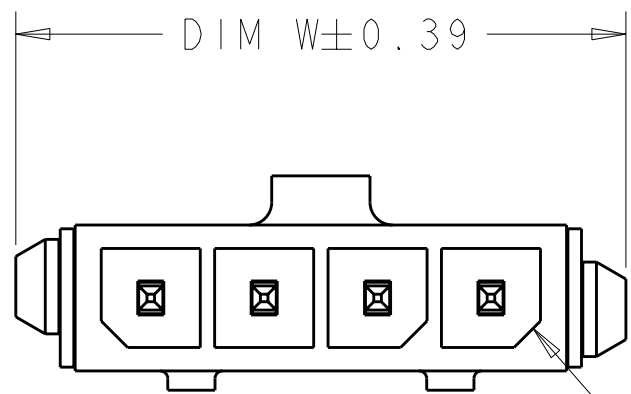

CIRCUIT 1

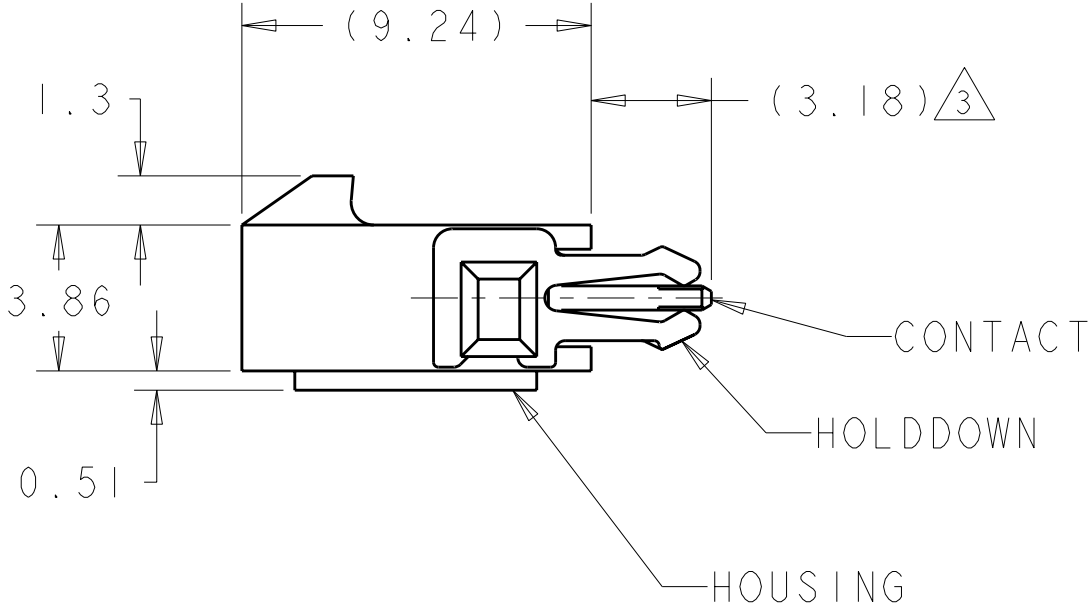


- 1 MATERIAL: CONTACTS - BRASS
HOUSING - UL 94V-O RATED HIGH TEMP NYLON, COLOR BLACK.
HOLDDOWNS- PHOSPHOR BRONZE.
- 2 PLATING: CONTACTS - 0.76µm MINIMUM GOLD ON MATING END, 2.54µm MINIMUM MATTE TIN ON SOLDER TAILS, BOTH OVER 1.27µm MINIMUM NICKEL.
HOLDDOWNS- 2.54µm MINIMUM MATTE TIN OVER 1.27µm MINIMUM NICKEL.
- 3 NO BARE EDGES ALLOWED ON SOLDER TAILS.
- 4 RECOMMENDED PC BOARD THICKNESS OF 1.57.

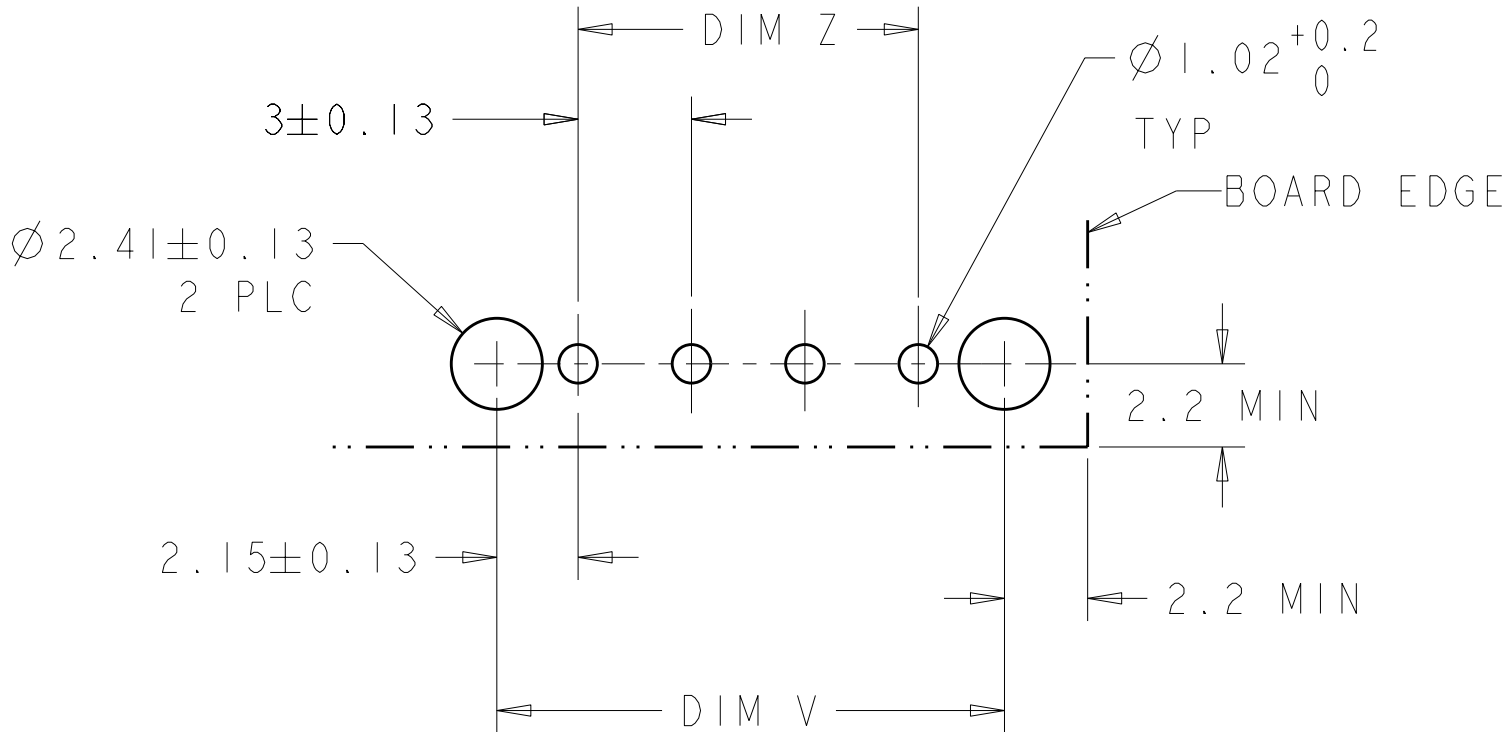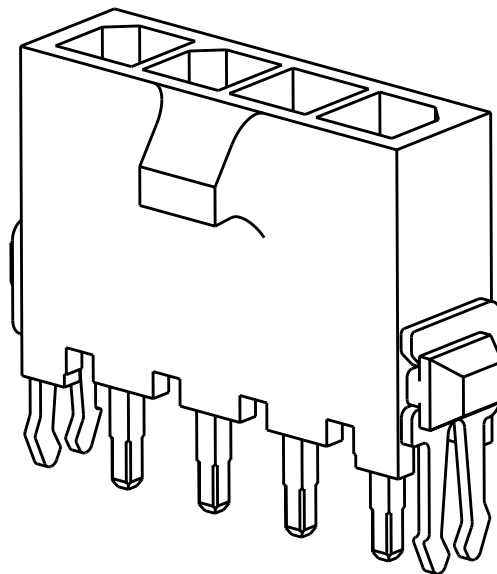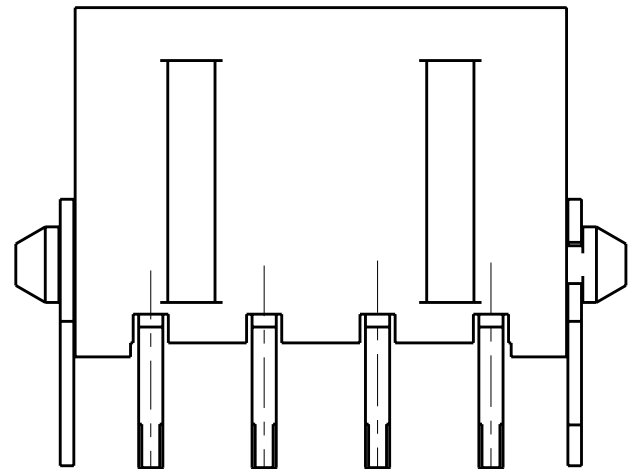

PCB LAYOUT COMPONENT SIDE



2	27.00	31.43	27.00	34.14	10	1-2029037-0
2	9.00	13.43	9.00	16.14	4	2029037-4
FINISH	DIM Z	DIM V	DIM T	DIM W	NO. OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER CHK C. JONES APVD C. JONES		17 JAN 2008 17 JAN 2008 17 JAN 2008		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME VERT THRU HOLE HEADER ASSY, 0.76 MIC GOLD CONTS, W/THRU HOLE HOLDDOWNS, SINGLE ROW, MICRO MATE-N-LOK(TM)			
		0 PLC ± 1 PLC ± 2 PLC ±0.20 3 PLC ± 4 PLC ± ANGLES ±		PRODUCT SPEC 108-1836 APPLICATION SPEC 114-13000		SIZE A2	
		MATERIAL  -		WEIGHT -		CAGE CODE 00779	
		FINISH SEE TABLE		DRAWING NO C-2029037		RESTRICTED TO -	
CUSTOMER DRAWING				SCALE 5:1		SHEET 1 OF 1	
				REV A1			