

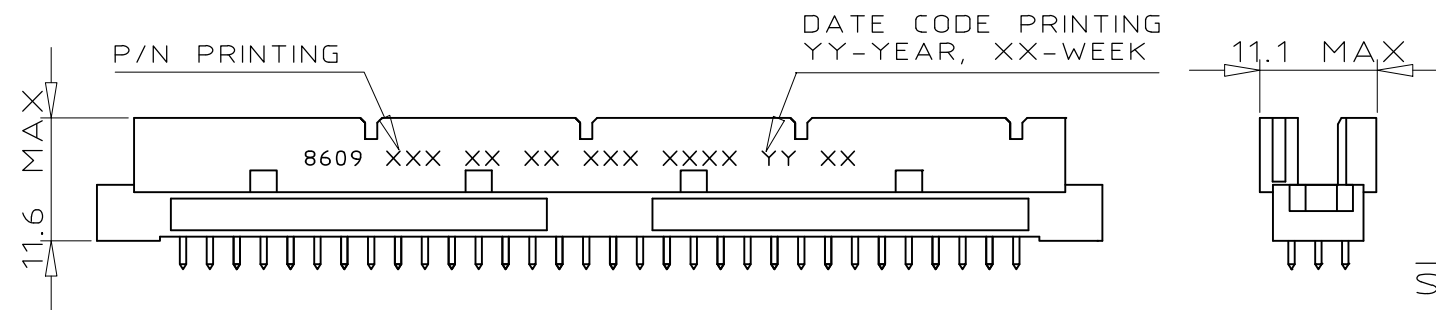


DIMENSIONS

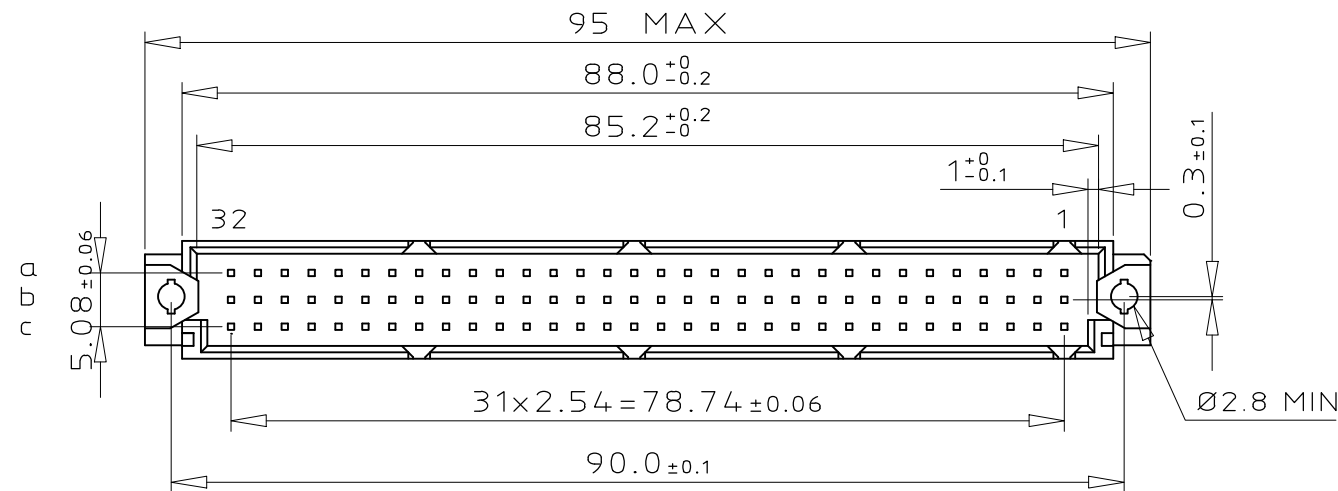

PCB LAYOUT

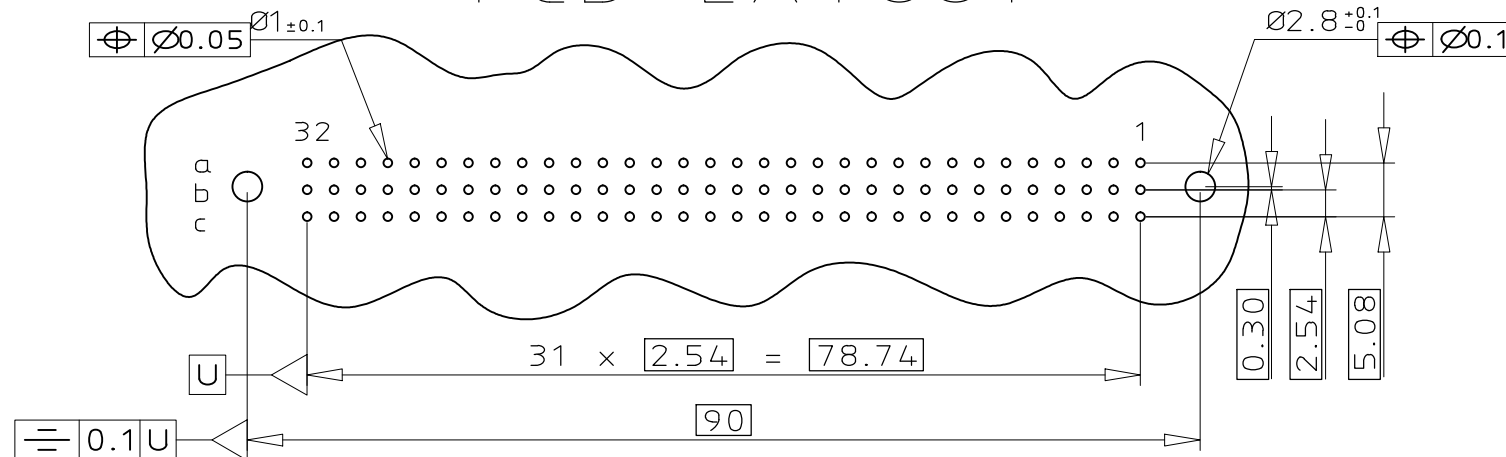


CONTACT ARRANGEMENT

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
a	X	X									X	X		X		X		X				X	X		X							
b	X	X									X			X								X	X	X	X	X	X	X				
c	X	X																							X							

☒ STANDARD CONTACT
 ☐ EMPTY CAVITY
 ☒ FMLB CONTACT
 ☐ LMEB CONTACT

GENERAL CHARACTERISTICS & RoHS INFO
REFER DRAWING C-8609-0000A

TERMINATION

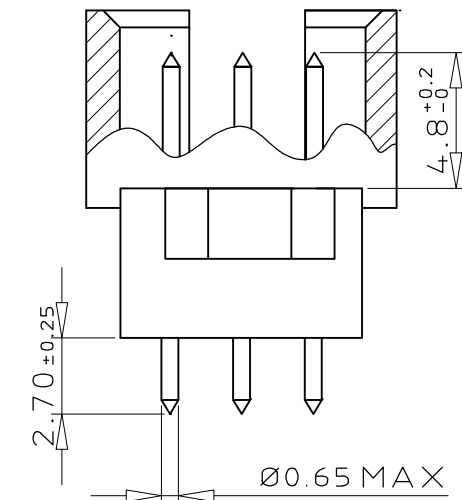

ORDERING INFORMATION

SERIES	8609	3	24	7	8	24	7	4	0	FXLF
ROWS FITTED WITH CONTACTS										
ROW a b c			3			24				
NO. OF CONTACTS										
TYPE OF INSULATOR										
3 ROW MALE INSULATOR						7				
METHOD OF MOUNTING										
REVERSE MOUNTING - STYLE R							8			
TERMINATION										
STRAIGHT SPILL SHORT								24		
OPTIONS										
NO OPTION									7	
PERFORMANCE CLASS										
DIN 41612 CLASS 3										4
DIN 41612 CLASS 2										5
DIN 41612 CLASS 1										6
AS PER MIL C 55302 / JSS 50808										8
PITCH PER ROW										
MIXED PITCH									0	
LEAD FREE VERSION SPECIAL LOADING										FXLF

mat'l. code SEE DWG C-8609-0000A	surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection mm	product family 8609
ltr A	ecn no 110-0227	dr SAL	date 2010-11-20	title DIN REVERSE HEADER STRAIGHT SPILL DIN 41612 STYLE R
				dwg no C-8609-2181
				sheet 1 of 1 A3
				type Product Customer Drawing
sheet index	revision sheet	A	1	