

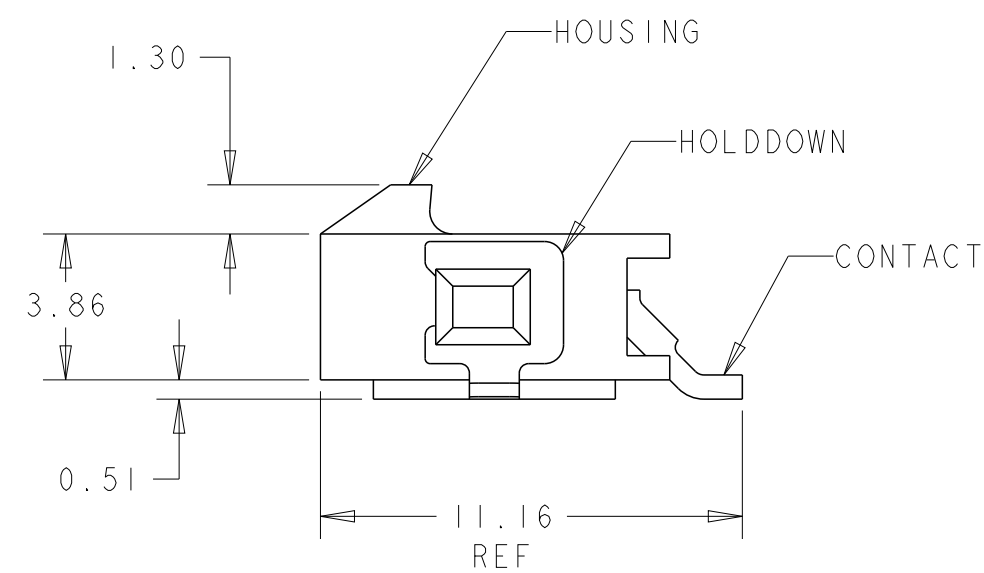


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C3	REVISED PER ECR-16-011494	20JUN2017	NK	CX

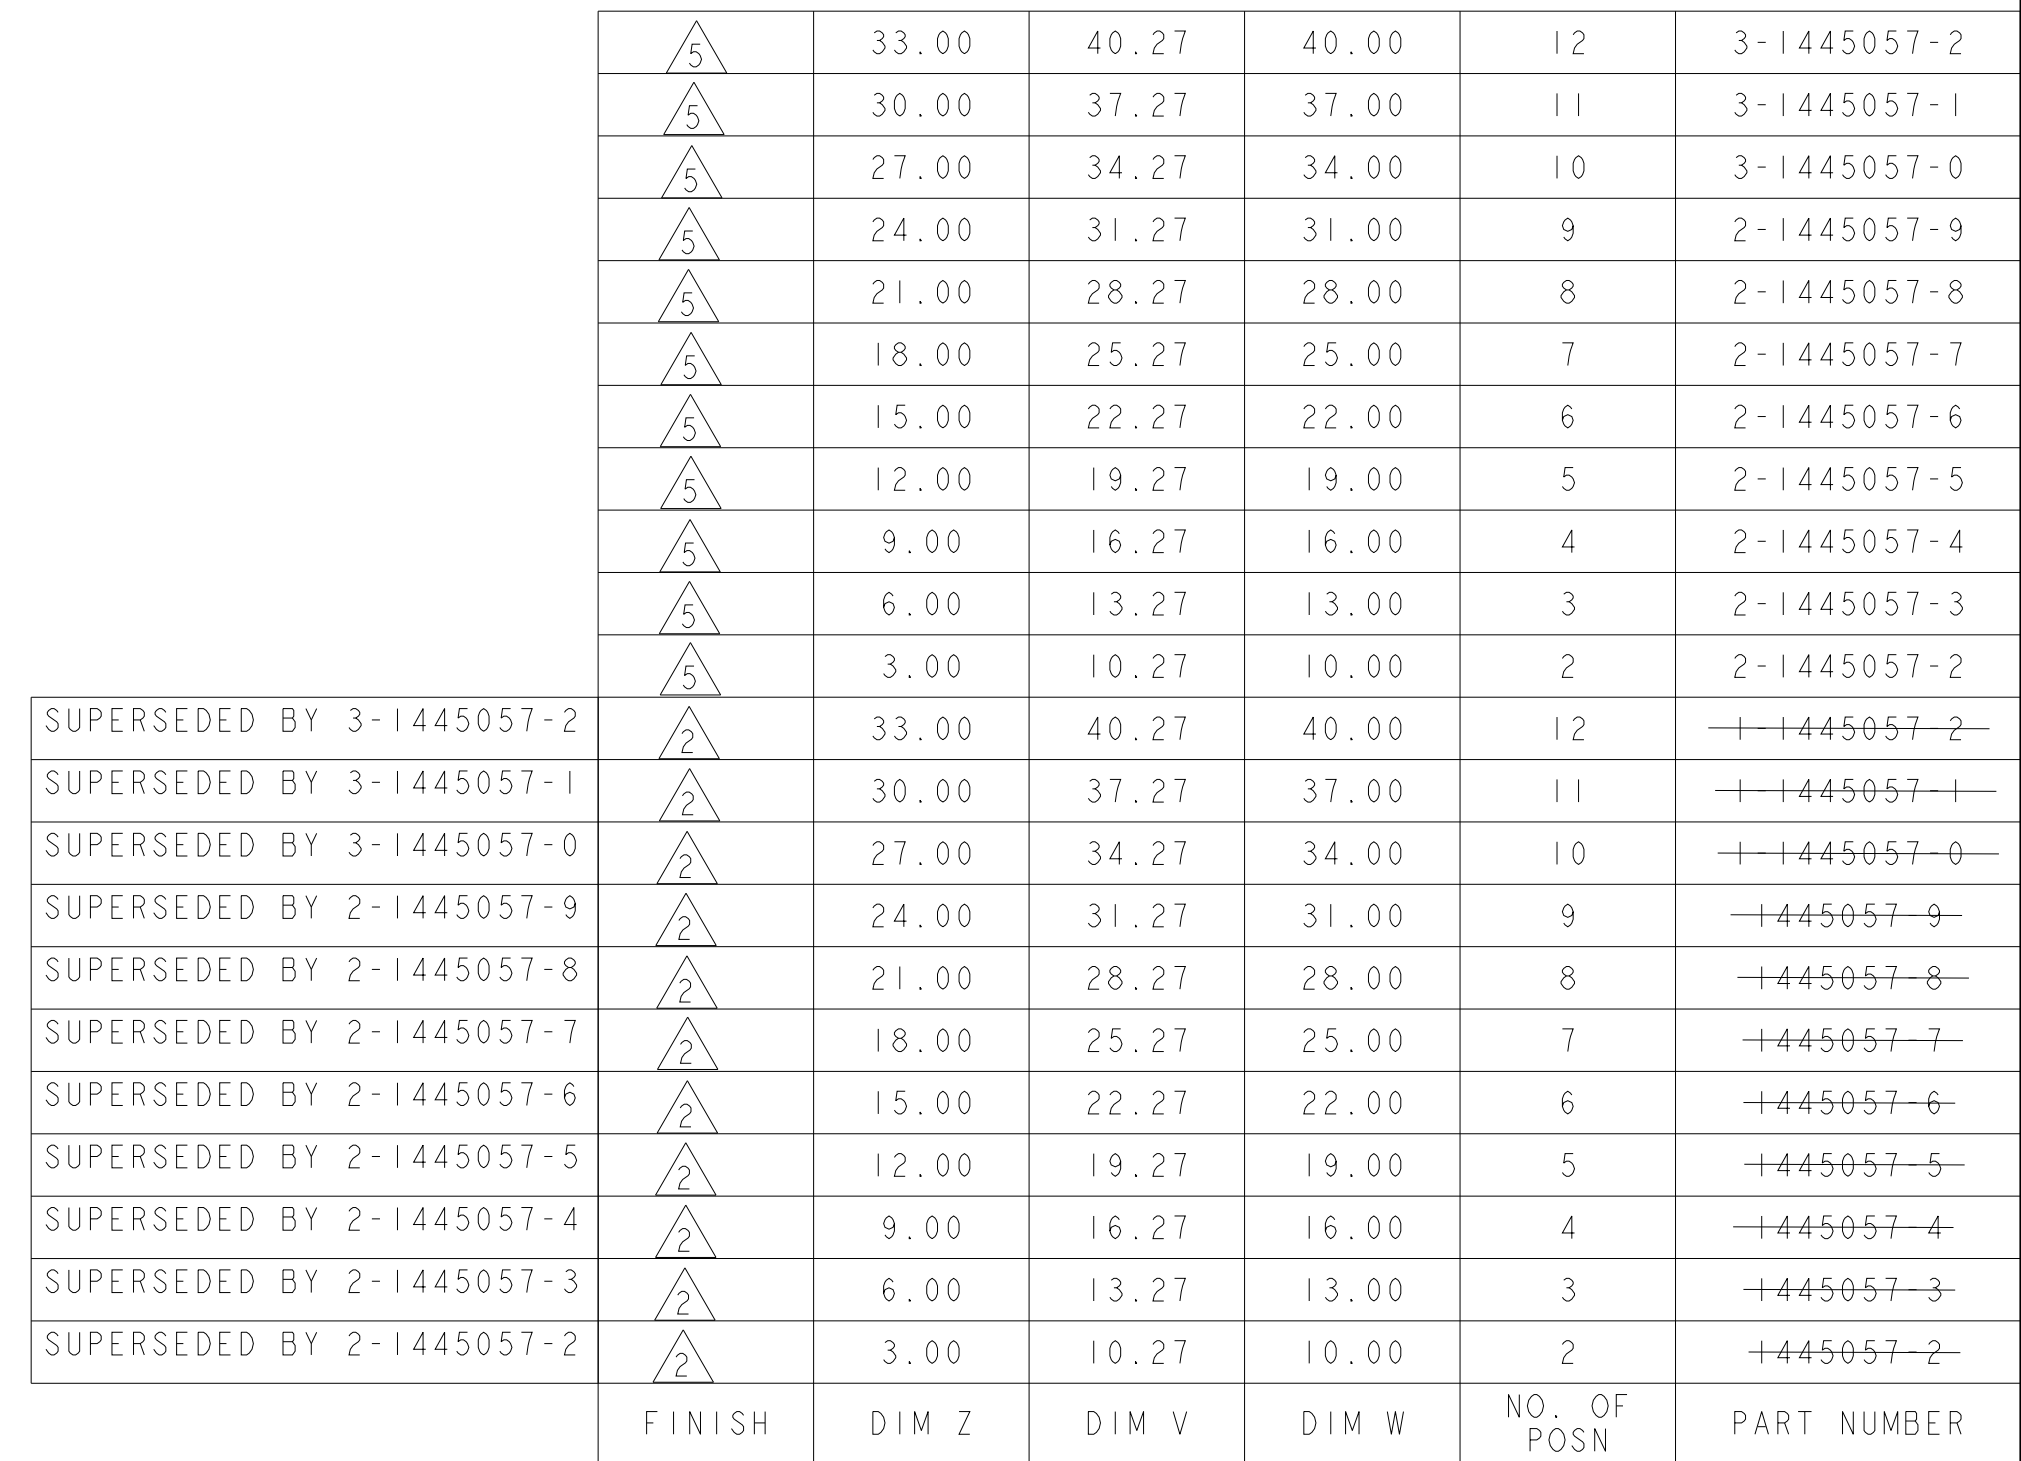

2 PLATING: CONTACTS- 2.54μm MINIMUM TIN LEAD OVER 1.27μm MINIMUM NICKEL.
HOLD DOWNS- 2.54μm MINIMUM TIN-LEAD OVER 1.27μm MINIMUM NICKEL.

5 PLATING: CONTACTS-2.54μm MINIMUM TIN OVER 1.27μm MINIMUM NICKEL.
HOLDDOWNS- 2.54μm MINIMUM TIN OVER 1.27μm MINIMUM NICKEL.

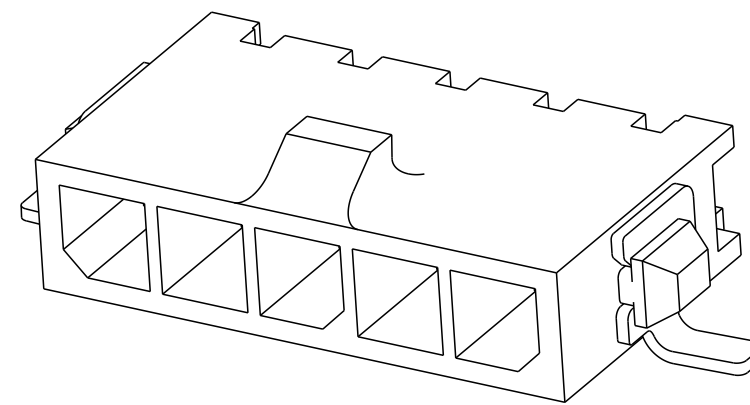

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 03-OCT-2000 J. ROOT		TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ±0.13 3 PLC ± 4 PLC ± ANGLES ±		NAME RT ANGLE SURFACE MOUNT HEADER ASSY, TIN CONTACTS W/SURF MOUNT HOLDDOWNS, SINGLE ROW, MICRO MATE-N-LOK™	
		PRODUCT SPEC 108-1836		SIZE A2	
MATERIAL		APPLICATION SPEC 114-13000		CAGE CODE 00779	
		WEIGHT -		DRAWING NO C-1445057	
FINISH SEE TABLE		CUSTOMER DRAWING		RESTRICTED TO -	
				SCALE 5:1 SHEET 1 OF 1 REV C3	

PCB LAYOUT COMPONENT SIDE