
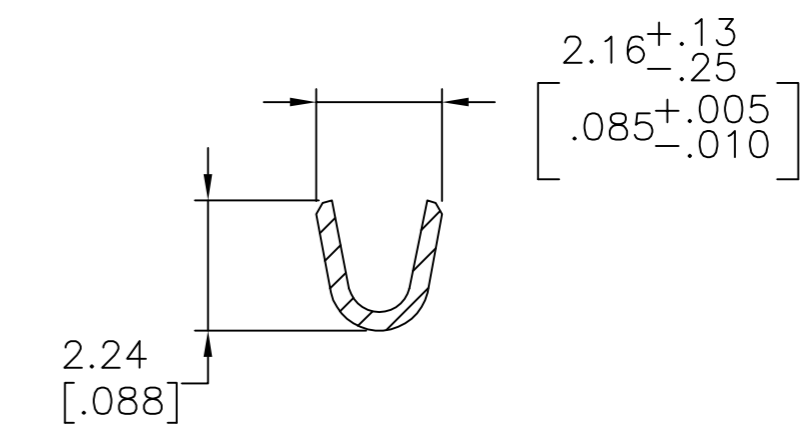
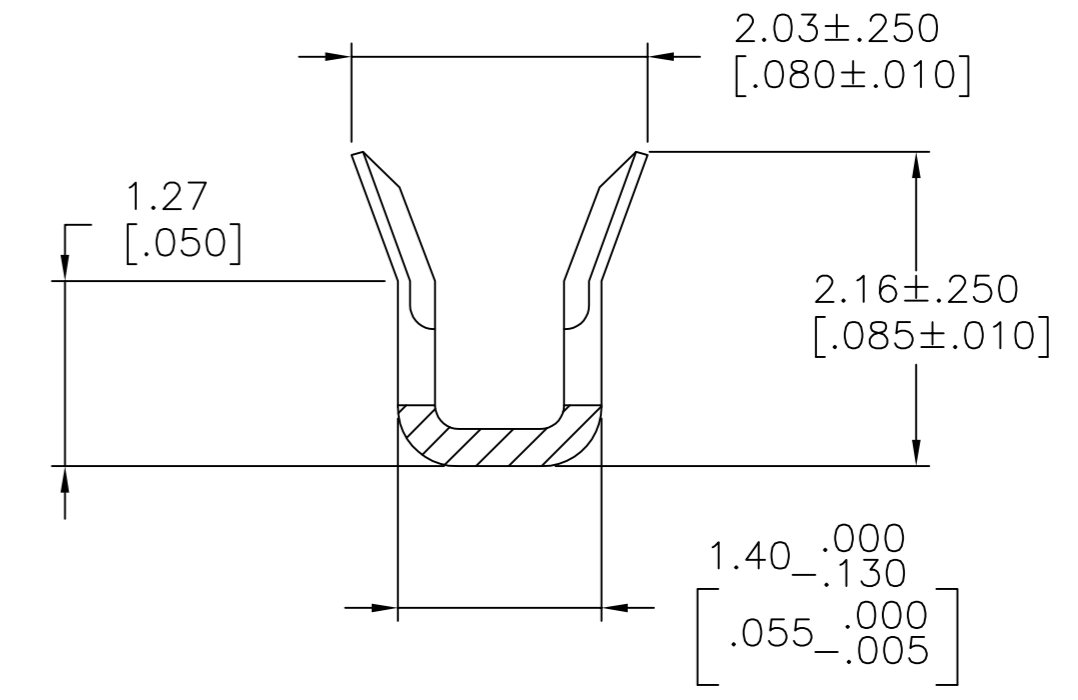


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - T1 ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
U		REVISED PER ECO-12-012316	05JUL12	KH	MZ
V		REVISED PER ECO-16-017885	06OCT2017	RS	MZ

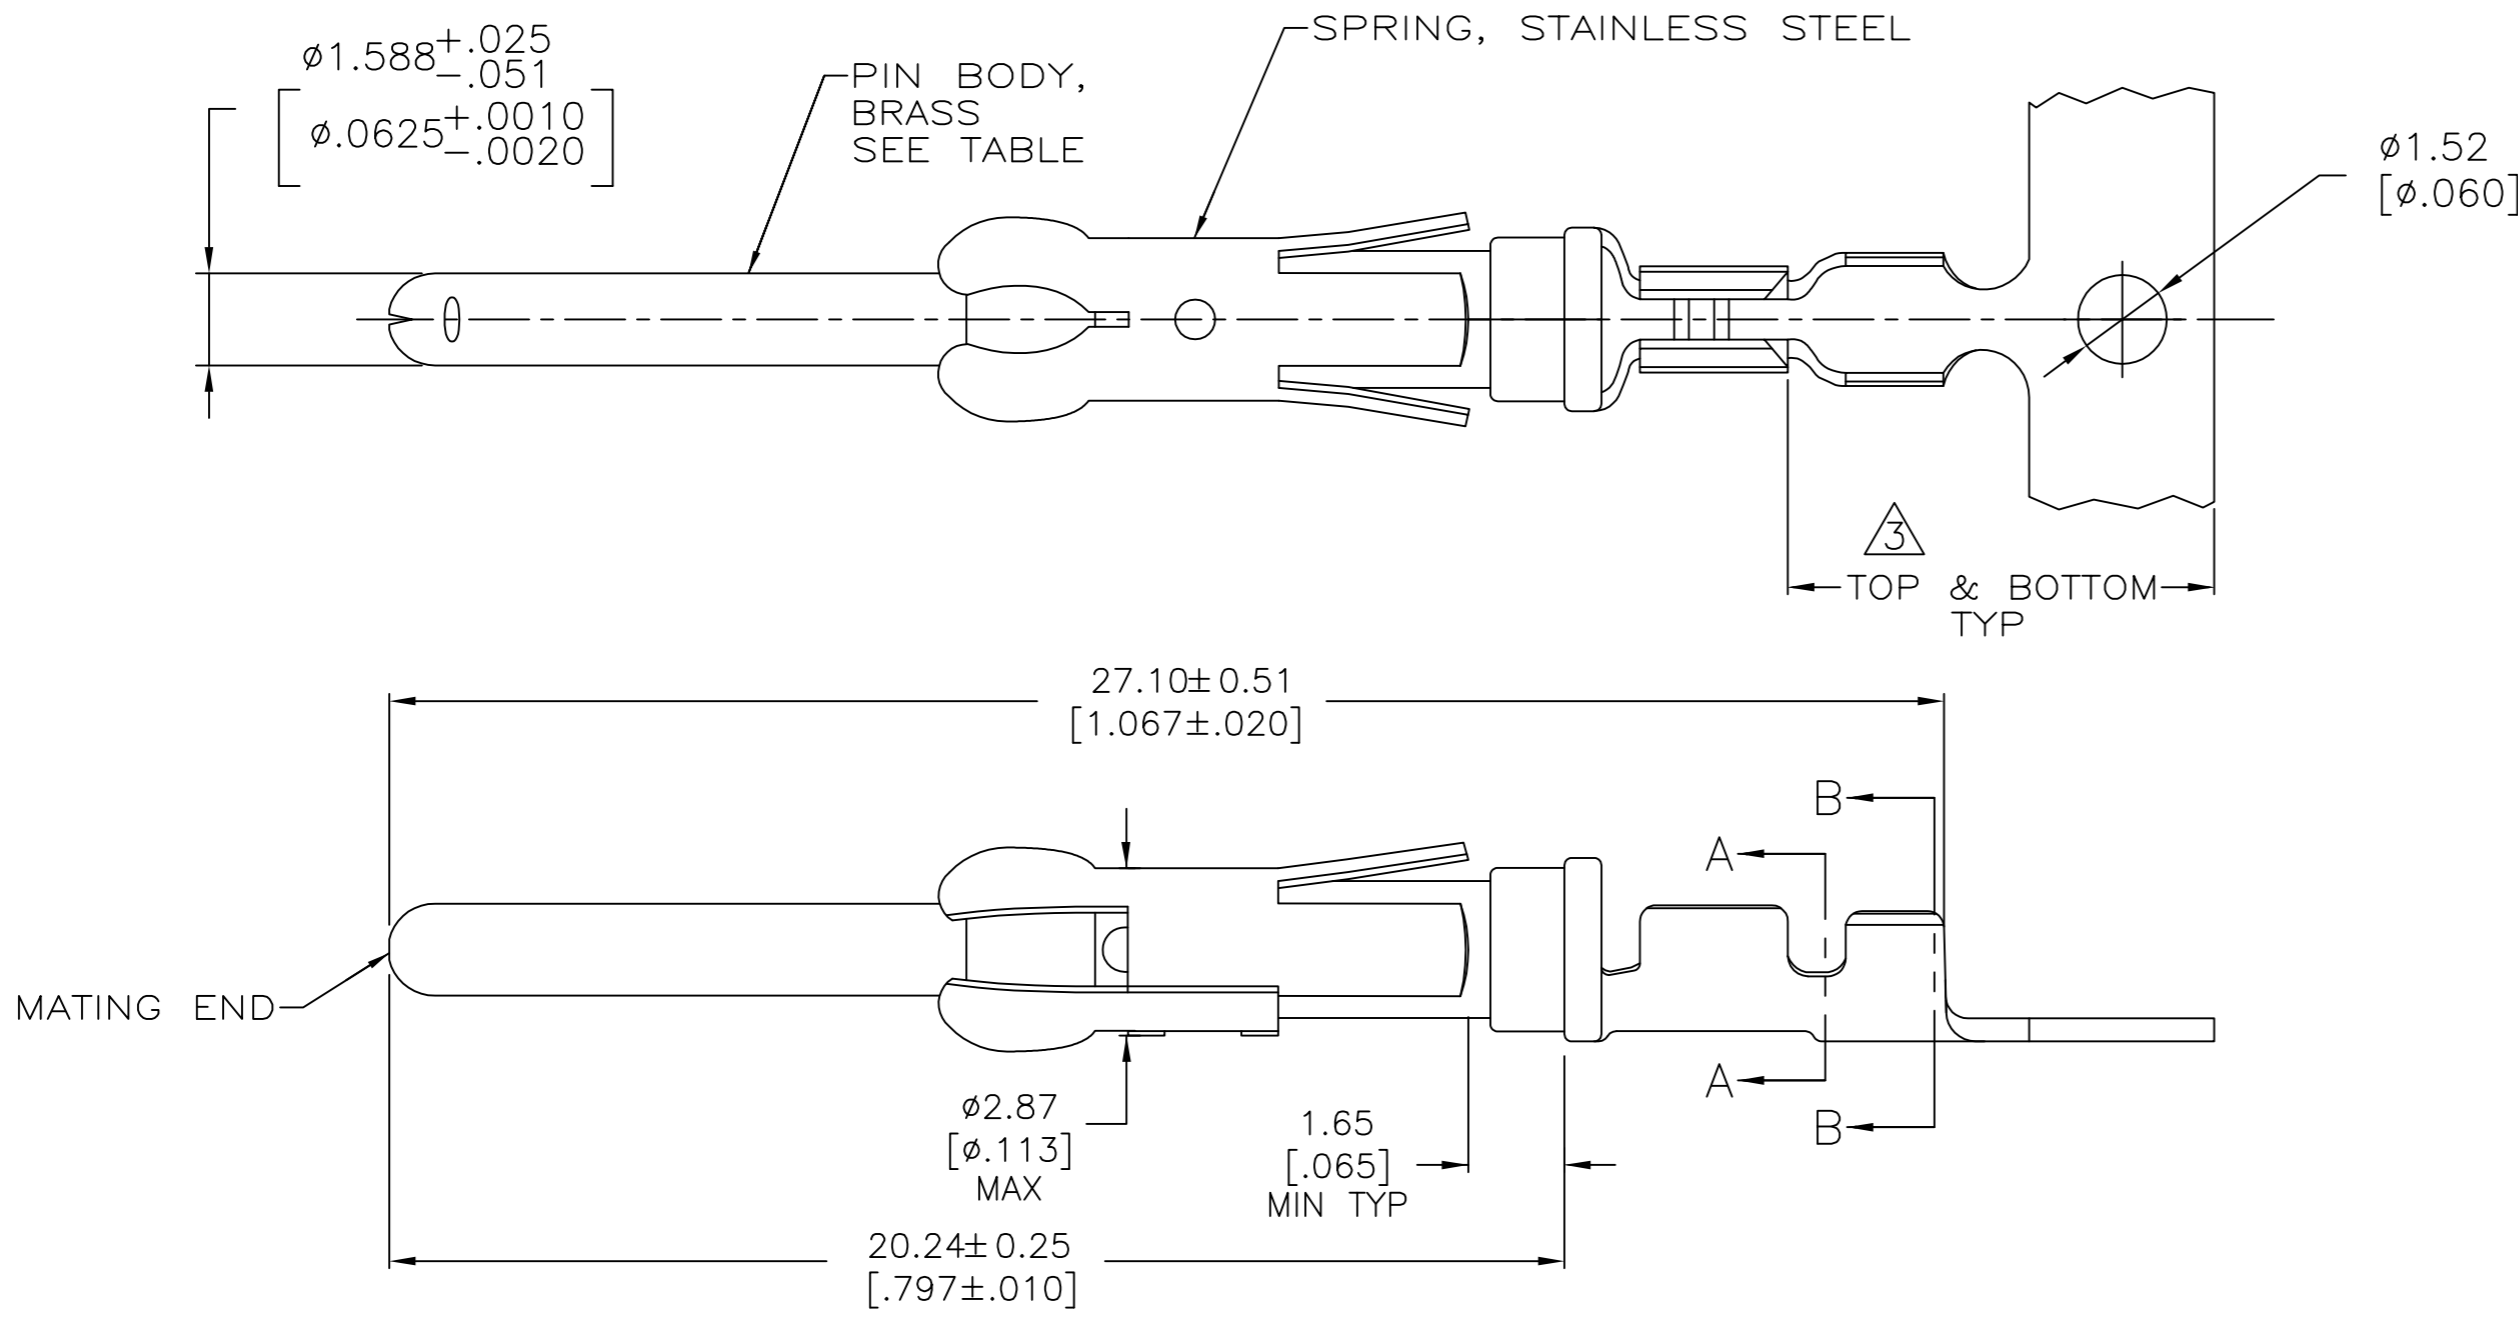

- 1.  $0.76 \mu\text{m}$  [ $.000030$ ] MIN PRECIOUS METAL PLATE ON MATING END FOR A LENGTH OF  $5.08$  [ $.200$ ] MIN WITH  $1.27 \mu\text{m}$  [ $.000050$ ] MIN MATTE TIN PLATE IN WIRE CRIMP AREA, BOTH OVER  $1.27 \mu\text{m}$  [ $.000050$ ] MIN NICKEL PLATE. CONFORMS TO THE REQUIREMENTS OF TE CONNECTIVITY PRODUCT SPEC 108-10042, BASED ON EIA/ECA-364-1000.01A ( CONTROLLED ENVIRONMENT APPLICATIONS ).
- 2. REELED FOR MINI-APPLICATOR.
- 3. GOLD PLATING NEED NOT APPEAR IN THIS AREA.
- 4.  $0.76 \mu\text{m}$  [ $.000030$ ] MIN PRECIOUS METAL PLATE ON MATING END FOR A LENGTH OF  $5.08$  [ $.200$ ] MIN WITH A UNIFORM GRADIENT TO  $0.25 \mu\text{m}$  [ $.000010$ ] ON REMAINDER, OVER  $1.27 \mu\text{m}$  [ $.000050$ ] MIN NICKEL PLATE. GOLD FLASH ALL OVER. CONFORMS TO THE REQUIREMENTS OF TE CONNECTIVITY PRODUCT SPEC 108-10042, BASED ON EIA/ECA-364-1000.01A ( CONTROLLED ENVIRONMENT APPLICATIONS ).
- 5.  $0.38 \mu\text{m}$  [ $.000015$ ] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF  $5.08$  [ $.200$ ] MIN WITH  $1.27 \mu\text{m}$  [ $.000050$ ] MIN MATTE TIN PLATE IN WIRE CRIMP AREA, BOTH OVER  $1.27 \mu\text{m}$  [ $.000050$ ] NICKEL PER QQ-N-290.
- 6. WIRE RANGE 26-30 AWG.
- 7. INSULATION RANGE  $1.02$  [ $.040$ ]- $1.52$  [ $.060$ ] DIA.
- 8.  $1.27 \mu\text{m}$  [ $.000050$ ] MIN TIN-LEAD PER MIL-T-10727 OVER  $1.27 \mu\text{m}$  [ $.000050$ ] MIN NICKEL PER QQ-N-290.
- 9.  $0.38 \mu\text{m}$  [ $.000015$ ] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF  $5.08$  [ $.200$ ] MIN,  $1.27$  MIL-T-10727 FOR A LENGTH OF  $5.69$  [ $.224$ ] MIN ON OPPOSITE END, BOTH OVER  $1.27 \mu\text{m}$  [ $.000050$ ] MIN NICKEL PER QQ-N-290 ON ENTIRE CONTACT.
- 10.  $1.27 \mu\text{m}$  [ $.000050$ ] MIN TIN PER MIL-T-10727 OVER  $1.27 \mu\text{m}$  [ $.000050$ ] MIN NICKEL PER QQ-N-290.

	2	10	-	1-66425-2
OBSELETE	2	9	66429-6	1-66425-1
	2	1	66429-4	66425-8
	2	5	66429-3	66425-7
OBSELETE	2	8	-	66425-6
OBSELETE	2	4	66429-1	66425-5
	STANDARD	1	66429-4	66425-4
	STANDARD	5	66429-3	66425-3
OBSELETE	STANDARD	4	66429-1	66425-1
	REELING	PIN BODY FINISH	LOOSE PIECE REF	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN V. FURLER 28JUL03	<b>TE</b> TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK G. STEINHAUER 28JUL03		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD G. STEINHAUER 28JUL03	NAME	
0 PLC ± -		PRODUCT SPEC	PIN ASSEMBLY, .062, TYPE III+	
1 PLC ± -		APPLICATION SPEC	SIZE A2	CAGE CODE 00779
2 PLC ± 0.13 [.005]		WEIGHT -	DRAWING NO C=66425	RESTRICTED TO -
3 PLC ± -		CUSTOMER DRAWING	SCALE 8:1	SHEET 1 of 1
4 PLC ± -			REV V	
ANGLES ± -				
FINISH				
SEE CALLOUTS		SEE TABLE		