

CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes


more than you expect



ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	3-5 @20°C	0.100 ohms max.
D.C. RESISTANCE	6-10 @20°C	0.030 ohms max.
D.C. RESISTANCE	7-9 @20°C	0.030 ohms max.
INDUCTANCE	3-5 10kHz, 100mVAC, Ls	40uH ±10%
SATURATION CURRENT	20% rolloff from initial	3.8A
LEAKAGE INDUCTANCE	3-5 tie(6+7+9+10), 100kHz, 100mVAC, Ls	1uH typ., 2uH max.
DIELECTRIC	3-6 tie(9+10), 1875VAC, 1 second	1500VAC, 1 minute
URNS RATIO	(3-5):(6-10)	6:1, ±1%
URNS RATIO	(3-5):(7-9)	6:1, ±1%

GENERAL SPECIFICATIONS:
OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

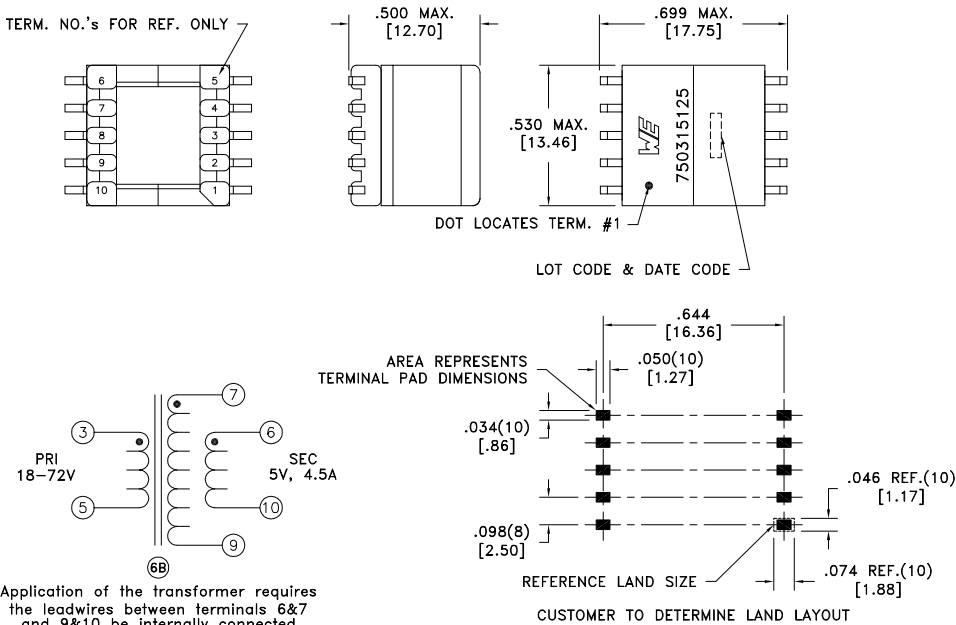

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

DETAILS SUBJECT TO CHANGE

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT	Tolerances unless otherwise specified:	DRAWING TITLE	PART NO.
		Method: Tape & Reel PKG-0499 www.we-online.com/midcom		Angles: $\pm 1^\circ$ Fractions: $\pm 1/64$	TRANSFORMER	750315125
6B	3/16			Decimals: $\pm .005$ [.13] Footprint: $\pm .005$ [.13]		
6A	6/15	SEE REVISION SHEET FOR	REVISION LEVEL	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750315125	SPECIFICATION SHEET 1 OF 1

