

ADQ600 Series

600 Watts

Data Sheet

Total Power: 600 Watts
Input Voltage: 40 - 60 V
of Outputs: Single

SPECIAL FEATURES

- Delivering up to 50 A output
- Ultra-high efficiency 95.6% typical at full load
- Wide input range: 40 V - 60 V
- Excellent thermal performance
- No minimum load requirement
- Basic isolation
- High power density
- Low output noise
- RoHS 6 compliant
- Remote control function (negative logic)
- Input under voltage lockout
- Output over current protection
- Output over voltage protection
- Over temperature protection
- Industry standard quarter-brick pinout outline
- Open-frame and baseplated
- Pin length option: 3.8 mm

SAFETY

- UL, cUL: UL60950
- TUV/CE: IEC/EN60950



Electrical Specifications

Input	
Input voltage (continuous)	63 V
Input voltage (non-continuous)	80 V 100 mSec
Input over voltage protection	63 Vdc
Input range	40 - 60 VDC
Efficiency	95.6% @ 12Vo
Output	
Output voltage	12 V
Output current	50 A
Voltage tolerance	+/-1%
Line regulation	0.1%
Load regulation	3.3%
Noise/ripple	200 mV
Over voltage protection	Hiccup at between 13.6 V and 16 V
Over temperature protection	Auto-restart
Switching frequency	175 KHz
Temperature coefficient	±0.02/°C
Isolation	
I/O isolation	1500 VDC min.

Environmental Specifications

Operating ambient temperature range	-40° C to +85 °C
Storage temperature	-55 °C to +125 °C
Humidity	5% to 95% (non-condensing)
MTBF	1.5 Million hours
RoHS Compliant	


Ordering Information

Model number	Input voltage	Output voltage	Power
ADQ600-48S12-6L	40 - 60 V	12 V @ 50 A	600 W
ADQ600-48S12B-6L	40 - 60 V	12 V @ 50 A	600 W

- Standard version is negative enable
- "-6" = 3.8 mm pin length
- "-L" = RoHS 6 compliance
- "B" = Baseplate

Mechanical Drawings

Open Frame Module:

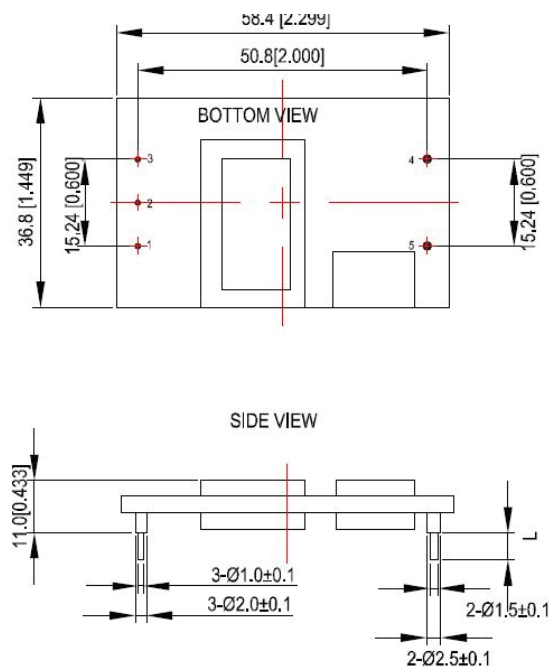


UNIT: mm[inch]

BOTTOM VIEW: pin on upside

TOLERANCE: X.Xmm±0.5mm[X.X in.±0.02in.]

X.XXmm±0.25mm[X.XX in.±0.01in.]

Baseplate Module:

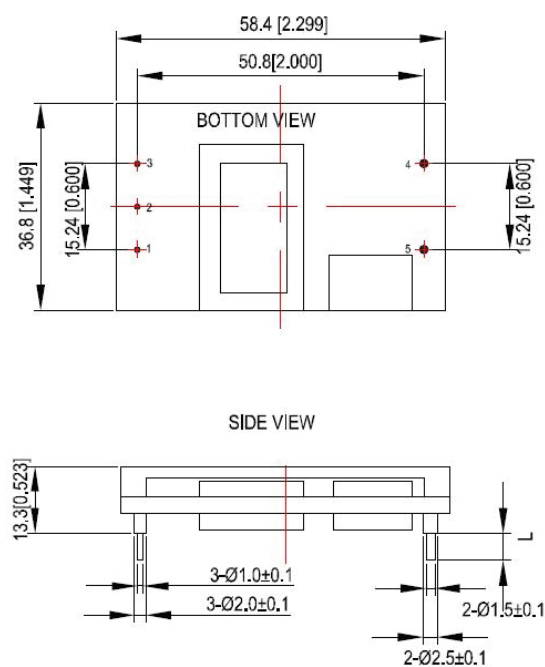

UNIT: mm[inch]

BOTTOM VIEW: pin on upside

TOLERANCE: X.Xmm±0.5mm[X.X in.±0.02in.]

X.XXmm±0.25mm[X.XX in.±0.01in.]

Pin Assignments

Pin #	Function
1	+Vin
2	Remote On/Off
3	-Vin
4	-Vout
5	+Vout

Notes:

1. All specifications are subject to change without notice. Mechanical drawings are for reference only.
2. Warranty: 2 years
3. Label and logo appearance may vary from what is shown on mechanical drawings.

WORLDWIDE OFFICES

Americas

2900 S.Diablo Way
Tempe, AZ 85282
USA
+1 888 412 7832

Europe (UK)

Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX
United Kingdom
+44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
+852 2176 3333

ARTESYN[™]
EMBEDDED TECHNOLOGIES

www.artesyn.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Artesyn Embedded Technologies assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions. Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. © 2015 Artesyn Embedded Technologies, Inc.

For more information: www.artesyn.com/power
For support: productsupport.ep@artesyn.com