







CATALOG LISTING
131EN27-2
PAGE 1 OF 1
RELEASE NO. ETS SR-12416
REPLACES
20JUL07
PSR
CHECK
21JUL04
AK
CHECK
16 FEB 80
CER
CHECK
12 FEB 80
WJM
DRAWN
FO-52861-B
RASTER

REVISIONS

A	CO44351	WJM	FEB 80
B	CO47573	TSM	AUG 80
C	CO49806	GRT	SEP 81
D	CO57370	JAP	MAY 85
E	CO67176		
F	201514	CSL	OCT 00
G	0006684	KSR	JUL 04
H	0032054	MST	JUL 07

MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-ENCLOSED
CATALOG LISTING
131EN27-2

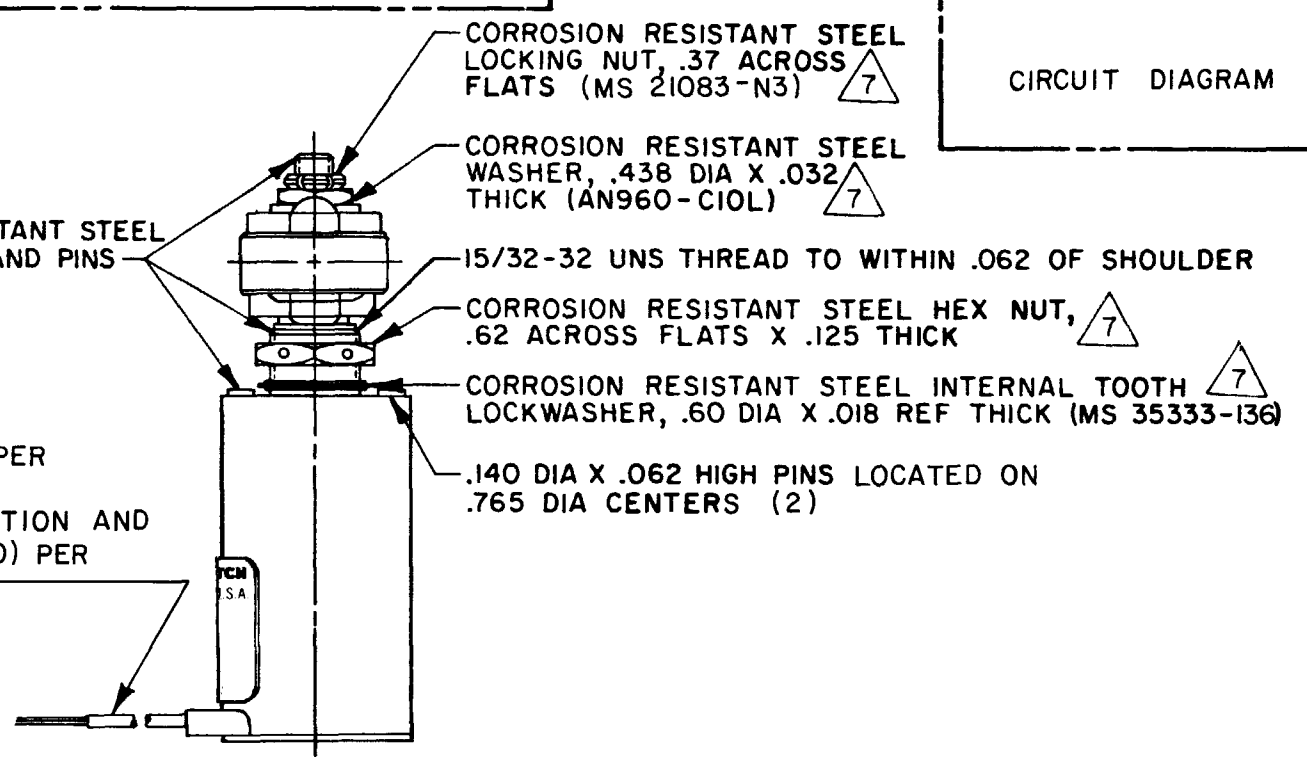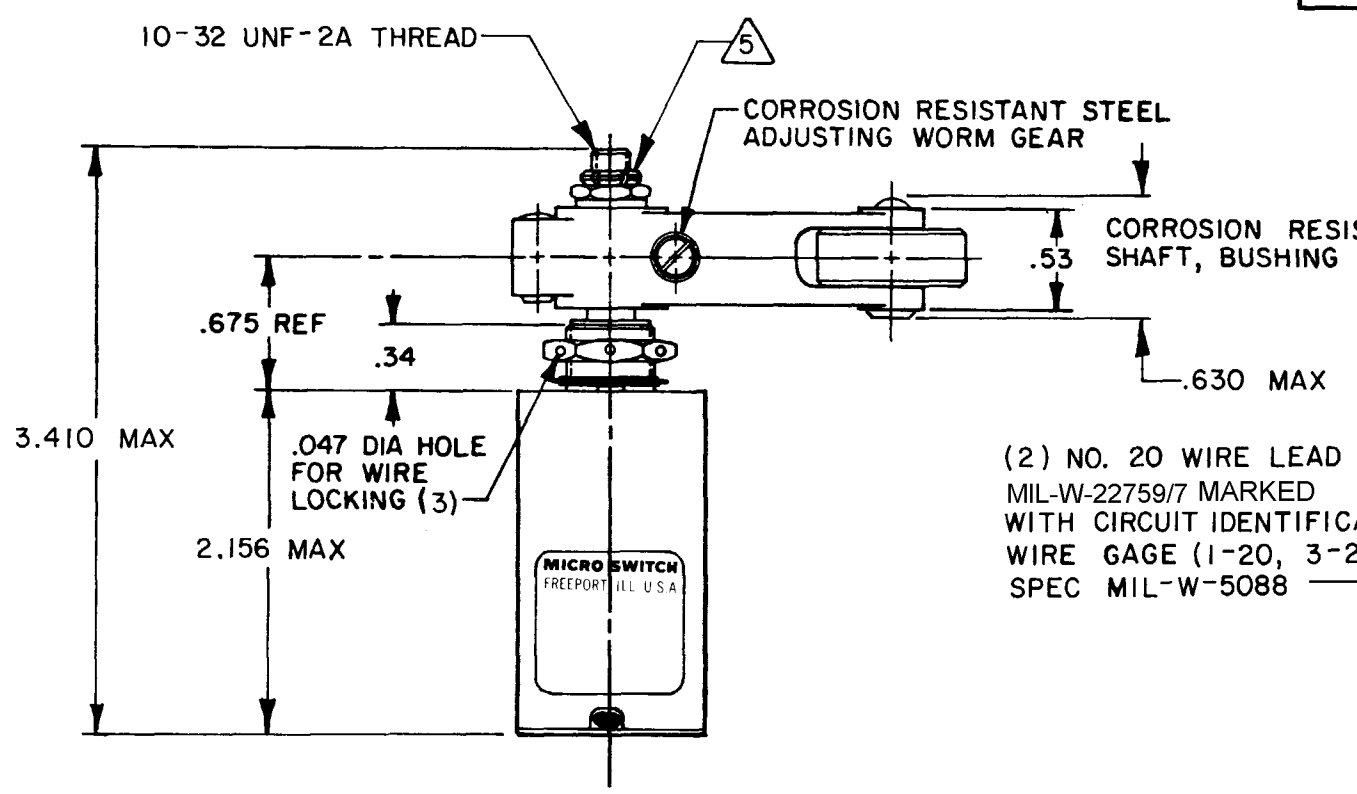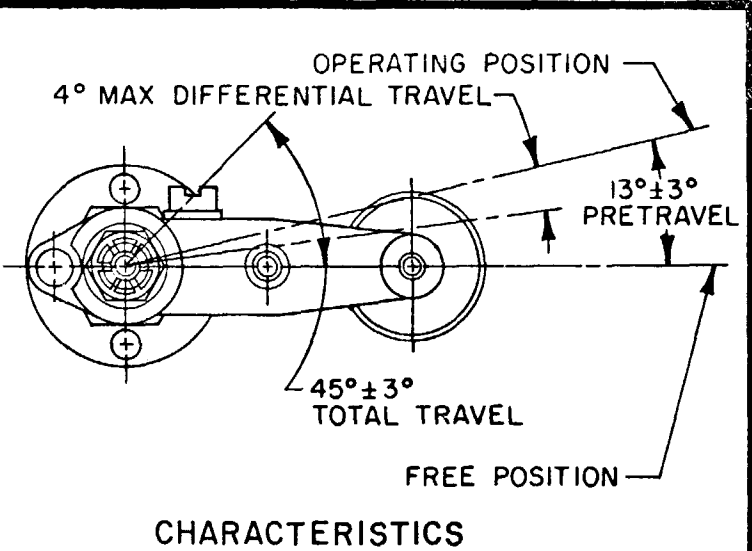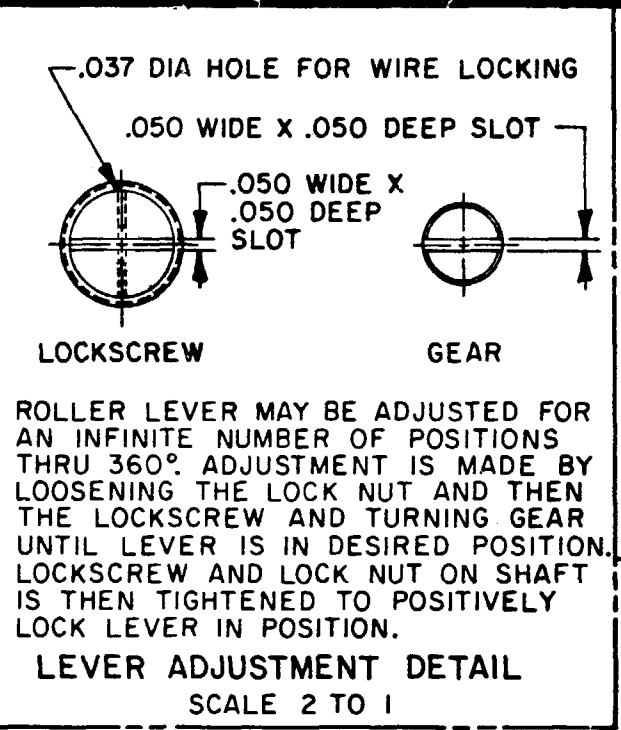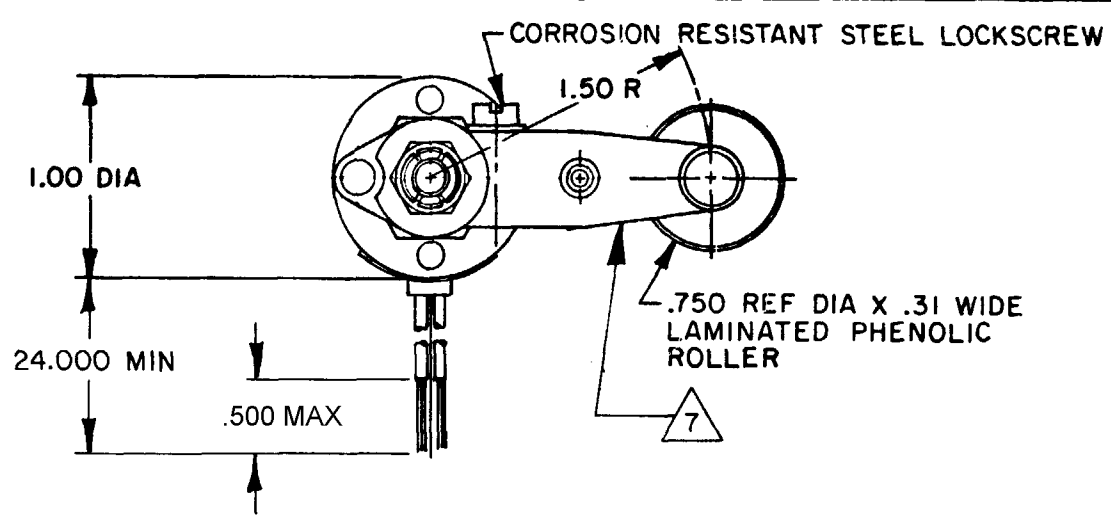

- NOTES**
- 1 - CORROSION RESISTANT STEEL ENCLOSURE
 - 2 - TOTAL TRAVEL OF ROLLER LEVER IS 45°±3° IN COUNTER-CLOCKWISE DIRECTION ONLY WITH SPRING RETURN TO NEUTRAL
 - 3 - SWITCH SEALED PER MIL-PRF-8805 SYMBOL 4
 - 4 - NOTED ELECTRICAL RATINGS APPLY AS SPECIFIED IN MIL-PRF-8805/48 UP TO 185°F
 - 5 - DO NOT APPLY MORE THAN 20-25 INCH-POUNDS OF TORQUE WHEN TIGHTENING LOCKING NUT
 - 6 - CIRCUIT DIAGRAM, CATALOG LISTING, AND DATE CODE ARE SHOWN ON NAMEPLATE
 - 7 - HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-PRF-8805

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.			SCALE FULL	
CHARACTERISTICS			DO NOT SCALE PRINT	
OPERATING TORQUE ----- 12-25 IN LB			TOLERANCES	
RELEASE TORQUE ----- 9 IN LB MIN			APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 2	
PRETRAVEL			DIM.	TOL.
DIFFERENTIAL TRAVEL			IN	IN
OVERTRAVEL			NO PLACES	X
FREE POSITION			ONE PLACE	X, X
SEE DETAIL			TWO PLACES	X, XX
			THREE PLACES	X, XXX
			ANGLES	
			SI METRIC	US CUSTOMARY
			DESIGN UNITS	
			THIRD ANGLE PROJECTION	
			WEIGHT	5.1 OZ MAX
ELECTRICAL DATA			CONTACT ARRANGEMENT	
			SPNO	
			28 VDC	
LOAD			SEA LEVEL	50,000 FT.
RES			5	5
IND			3	2
MOTOR			4	
LAMP				