

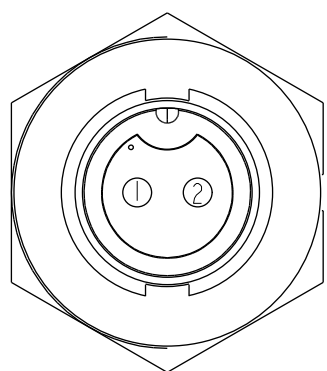
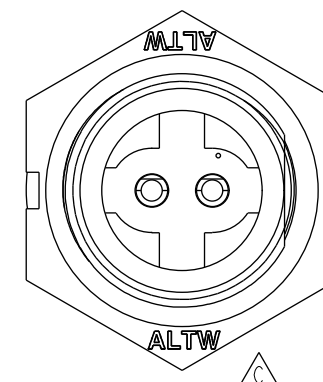
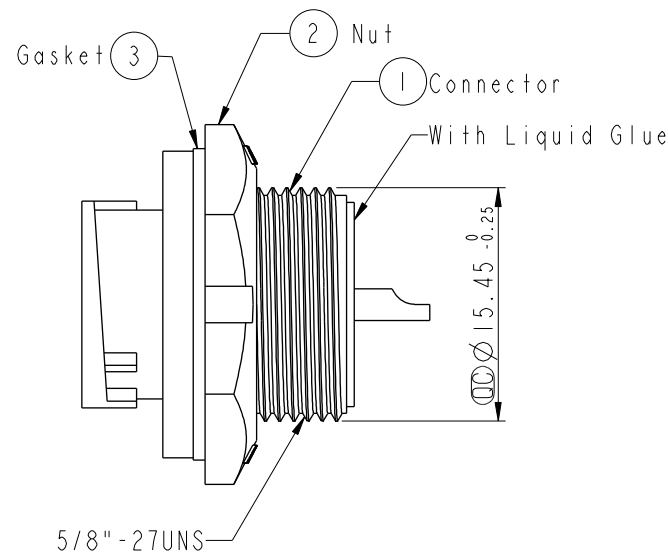



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8B0578	2008/09/10	Shin	Add Note
C	CI90274	2019/02/21	Ruru	Modify Note & Change Logo

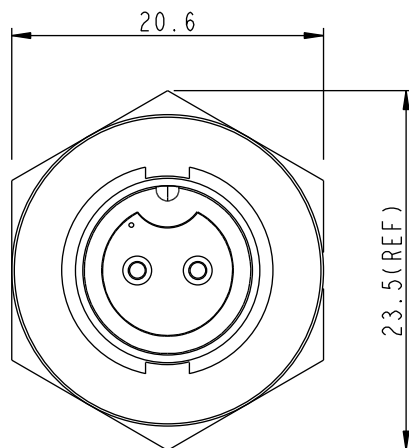

Pin Assignments
Front View



Recommended Panel Cut-out

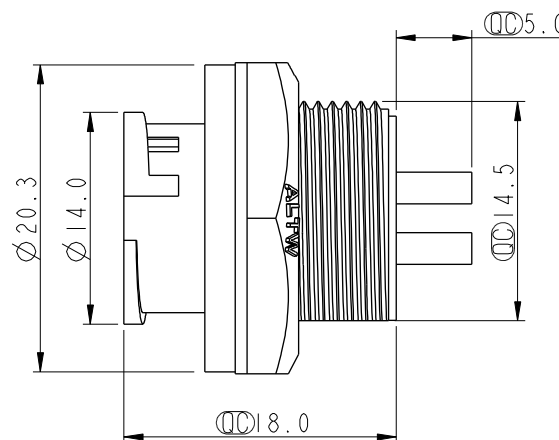

Note: $\triangle C$

* $\varnothing$ Important Dimension To Check.

* Waterproof Rate: IP67, Unmated

* Housing: Thermoplastic, Black

* Pin: Copper Alloy, Gold Plated

* Nut: Thermoplastic, Black

* Gasket: Rubber, Black

$\triangle B$ * Use With Waterproof Cap Or Dust Cap
Panel Thickness Max: 4.0mm

$\triangle B$ * Use Without Waterproof Cap Or Dust Cap
Panel Thickness Max: 5.0mm

* Gasket and Nut are packed separately
in PE bags.

UNIT:mm	
TOLERANCE	
.X	± 0.25
.XX	± 0.1
.XXX	± 0.05
ANGLES	$\pm 1^\circ$

TITLE Standard, Rear Lock 2P M Conn F Pin			
SCALE 2:1	SIZE A4	SHEET 1	OF 1
REV. C	WC-REV. A.2	$\varnothing$ Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO BD-02RMFS-LC7001	DRAWN BY Ruru	DATE 2019-02-21
DWG NO BD-02RMFS-LC7001	CHECKED BY Rita	DATE 2019-02-21
CUSTOMER ALTW	APPROVED BY Max	DATE 2019-02-21

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.