

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

1710655107

Status:


Active

Overview:

Impact™ Backplane Connector and Cable Assembly System

Description:

Impact™ 85 Ohm Plus 2 Pair Vertical Backplane Header, Right Guided, Open Endwall, 10 Columns, 60 Circuits, Pin Length 4.90mm, Plated Through Hole Dimension 0.39mm, Lead Free

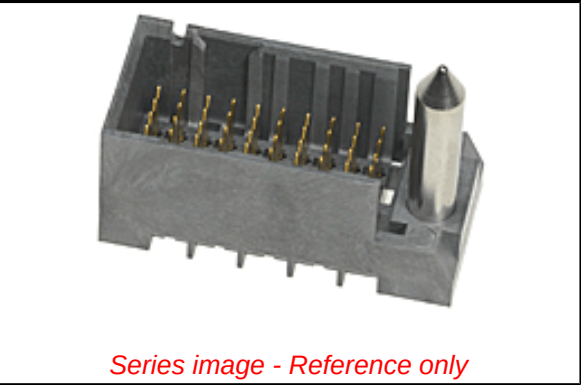

Series image - Reference only

Documents:

[Drawing \(PDF\)](#)

[Product Specification PS-170540-999 \(PDF\)](#)

[Application Specification AS-76060-990 \(PDF\)](#)

[Packaging Specification PK-70873-761 \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

| General                        |                                                       |
|--------------------------------|-------------------------------------------------------|
| Product Family                 | Backplane Connectors                                  |
| Series                         | 171065                                                |
| Application                    | Conventional, Mezzanine                               |
| Application Tooling Documents  | TM-622018799                                          |
| Component Type                 | PCB Header                                            |
| Electrical Model               | No                                                    |
| Overview                       | Impact™ Backplane Connector and Cable Assembly System |
| Product Name                   | Impact™                                               |
| Style                          | N/A                                                   |
| UPC                            | 887191626840                                          |
| Physical                       |                                                       |
| Circuits (Loaded)              | 60                                                    |
| Circuits (maximum)             | 60                                                    |
| Color - Resin                  | Black                                                 |
| Durability (mating cycles max) | 200                                                   |
| First Mate / Last Break        | No                                                    |
| Guide to Mating Part           | Yes                                                   |
| Keying to Mating Part          | None                                                  |
| Material - Metal               | High Performance Alloy (HPA)                          |
| Material - Plating Mating      | Gold                                                  |
| Material - Plating Termination | Tin                                                   |
| Material - Resin               | High Temperature Thermoplastic                        |
| Net Weight                     | 4.276/g                                               |
| Number of Columns              | 10                                                    |
| Number of Pairs                | 2                                                     |
| Number of Rows                 | 6                                                     |
| Orientation                    | Vertical                                              |
| PC Tail Length                 | 1.20mm                                                |
| PCB Locator                    | No                                                    |
| PCB Retention                  | None                                                  |
| PCB Thickness - Recommended    | 1.00mm                                                |
| Packaging Type                 | Tray                                                  |
| Pitch - Mating Interface       | 1.35mm, 1.90mm                                        |
| Pitch - Termination Interface  | 1.35mm, 1.90mm                                        |
| Plating min - Mating           | 0.762µm                                               |
| Polarized to PCB               | No                                                    |
| Stackable                      | No                                                    |
| Surface Mount Compatible (SMC) | No                                                    |
| Temperature Range - Operating  | -55°C to +85°C                                        |
| Termination Interface: Style   | Through Hole - Compliant Pin                          |

Electrical

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per -ED/79/2015 (17 December 2015)

Halogen-Free

Status

Low-Halogen

Need more information on product environmental compliance?

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS

Green Image

ELV

Not Relevant

Search Parts in this Series

171065 Series

| Application Tooling   FAQ                                                                                                                                                       |            |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document. |            |
| Global                                                                                                                                                                          |            |
| Description                                                                                                                                                                     | Product #  |
| Impact™ 85 Ohm Backplane Press-In Tool                                                                                                                                          | 0622018844 |
| Impact™ Insertion Tool                                                                                                                                                          | 0621005850 |

|                                    |                 |
|------------------------------------|-----------------|
| Current - Maximum per Contact      | 0.75A           |
| Data Rate                          | 25.0 Gbps       |
| Impedance                          | 85#             |
| Shield Type                        | N/A             |
| Shielded                           | No              |
| Voltage - Maximum                  | 30V AC (RMS)/DC |
| <b>Solder Process Data</b>         |                 |
| Lead-freeProcess Capability        | N/A             |
| <b>Material Info</b>               |                 |
| <b>Reference - Drawing Numbers</b> |                 |
| Application Specification          | AS-76060-990    |
| Packaging Specification            | PK-70873-761    |
| Product Specification              | PS-170540-999   |
| Sales Drawing                      | SD-171065-0003  |

This document was generated on 06/10/2016

PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION