
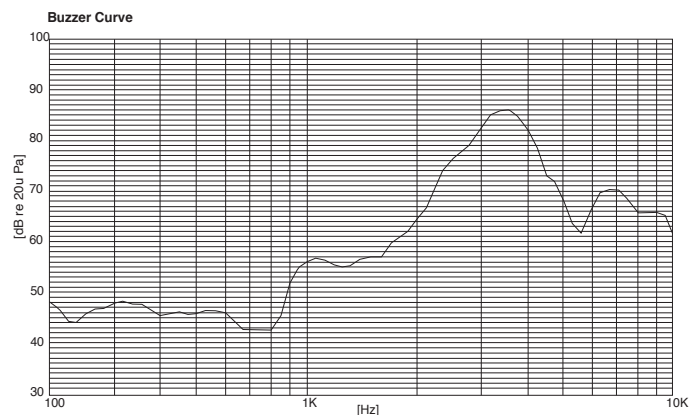
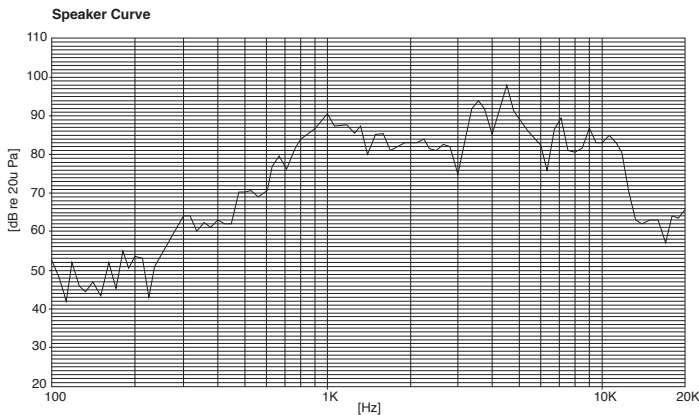


DIMENSIONS: mm

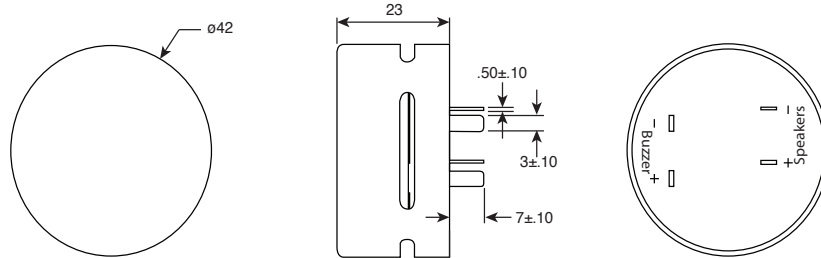

Speaker Specifications:

- Nominal Impedance: $4\Omega \pm 15\%$ At 1000Hz at 1V
- Power Rating: Normal 5W Maximum 8W
- Lowest Resond Frequency: $1000\pm 150\text{Hz}$
- Output Sound Pressure: $84\pm 3 \text{ dB}/1\text{W}/1\text{M}$
 $90\pm 3 \text{ dB}/5\text{W}/1\text{M}$ Average at 1000Hz
- Frequency Response Range: 300~1200Hz Average SPL-20dB
- Operating Temperature: -40°C to $+ 100^\circ\text{C}$
- Storage Temperature: -40°C to $+ 100^\circ\text{C}$

Buzzer Specifications:

- Sound Pressure Level: $85\text{dB}\pm 3 \text{ dB Min}/3\text{M}/27\text{VPP}$
- Oscillating Frequency: $4\pm 0.5\text{KHz}$
- Current Consumption: $8\text{mA Max.}/27\text{VPP}$
- Tone: Continuous Tone
- Operating Temperature: -40°C to $+ 100^\circ\text{C}$
- Storage Temperature: -40°C to $+ 100^\circ\text{C}$

Note:

- RoHS Compliant by Exemption