





TOP VIEW

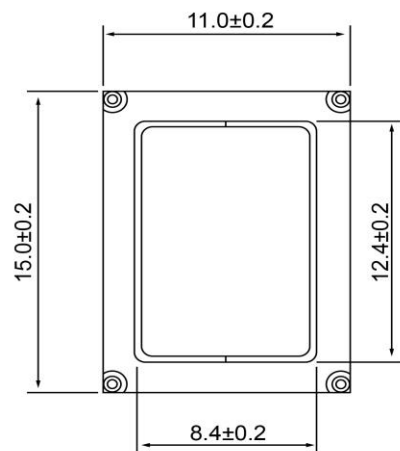

SIDE VIEW

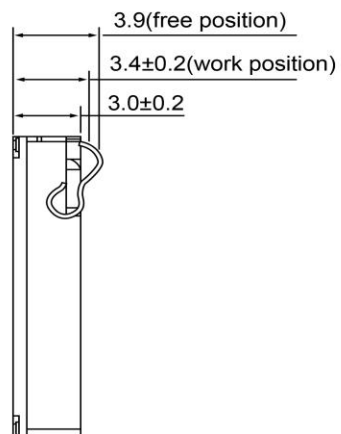

BOTTOM VIEW

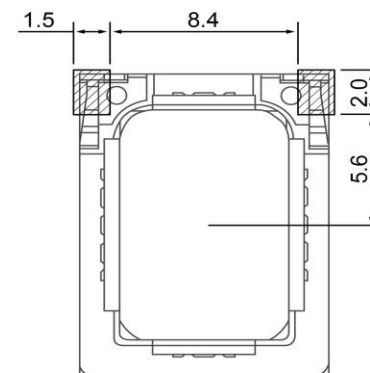RECOMMENDABLE
LAND PATTERN

Specifications

Description	Value	Unit
Shape	Rectangle	
Resonant Frequency	500	(Hz)
Frequency Range	500 ~ 20,000	(Hz)
SPL @ 10cm	92	(dBA)
Impedance	6	(Ohm)
Cone Material	Mylar	
Nominal Power	0.7	(W)
Max Power	1	(W)
Mount Type	Flush Mount	
Operating Temperature	-20 ~ +70	°C
Storage Temperature	-20 ~ +70	°C
Weight	1.6	(g)

Notes

- 1) All dimensions are in mm unless otherwise noted
- 2) All parts meet RoHS



Revision History

Version	Description			Date	Approved
1	Released from Engineering			2/18/2015	J.S.
Drawn by	Date	Checked by	Date	Approved by	Date
G.W.	1/2/2015	P.D.	2/18/2015	J.S.	2/18/2015

Dynamic Micro Speaker

SM150506-1