
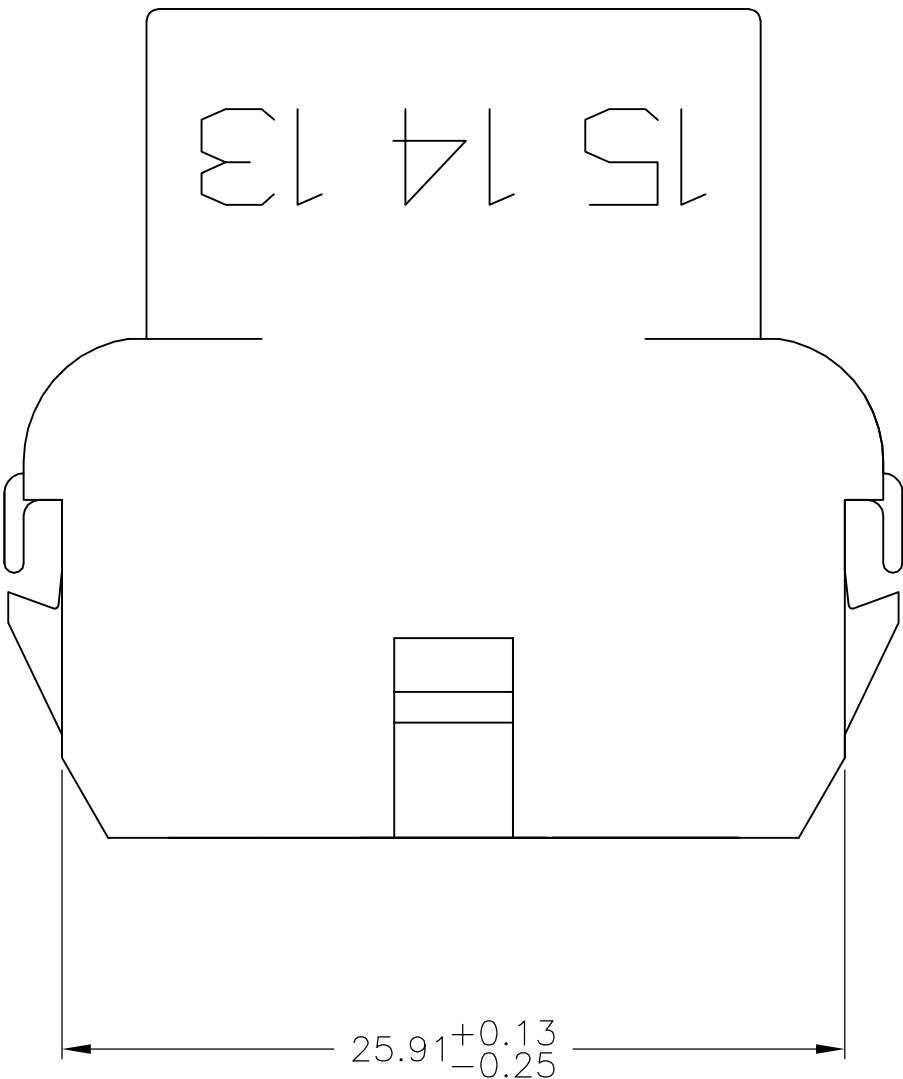
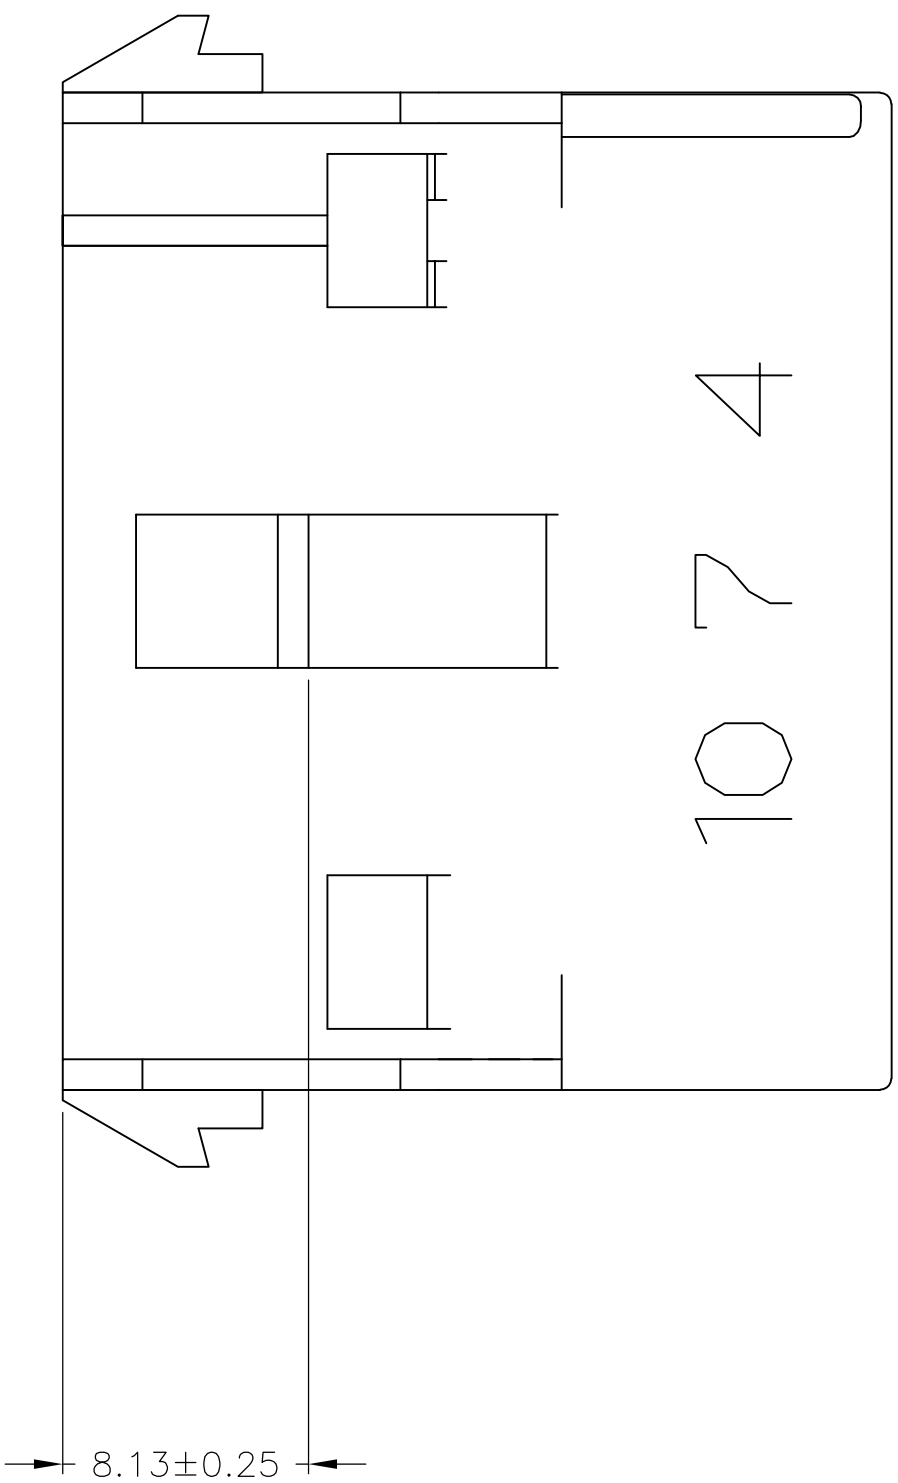
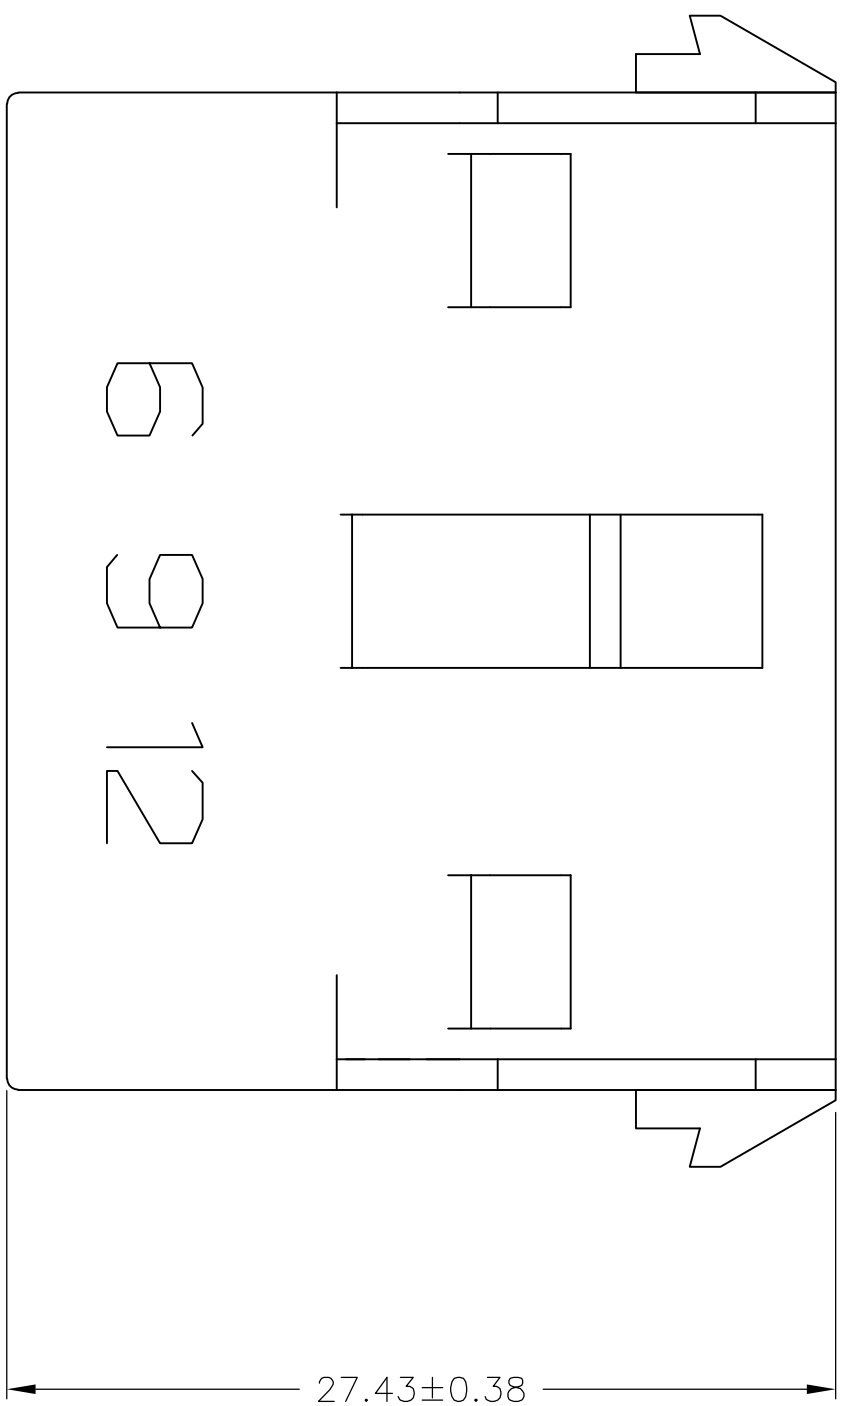
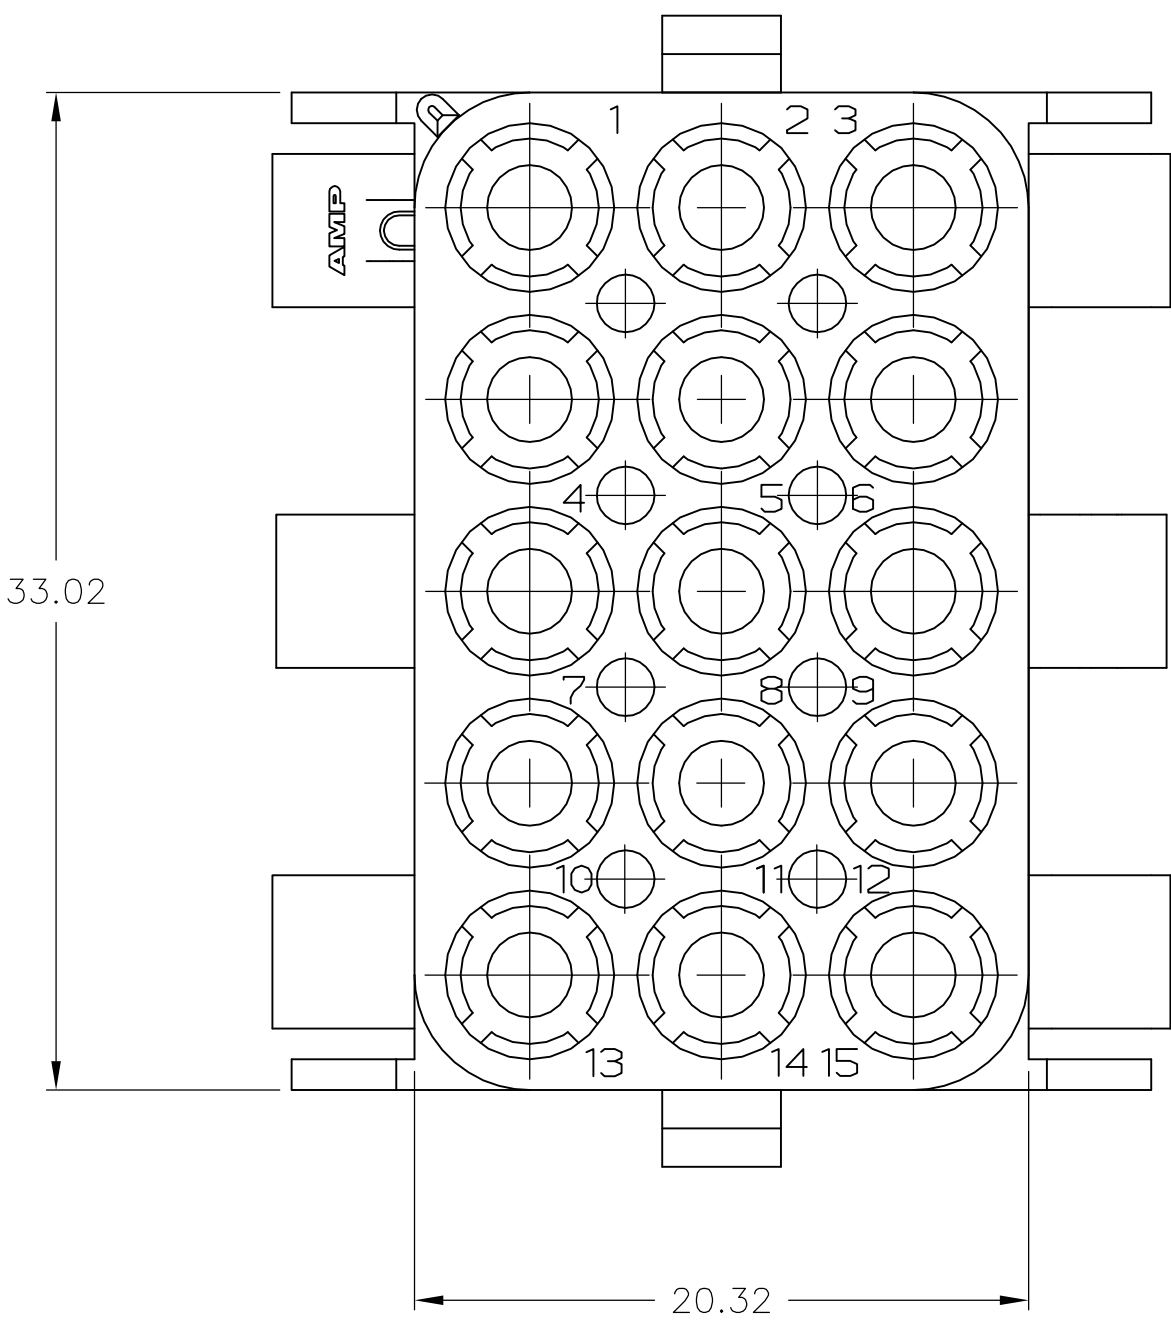


LOC		DIST		REVISONS			
CM	00	#	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

- 1 . STAMP NUMBERS 3.18 HIGH AT WIRE END OF HOUSING (12 POINT DAVID TYPE);CLARIFICATION MARKS UNDER THE 6 & 9.
2. CHARACTERS TO BE STAMPED ON HOUSING IN A MANNER AS TO BE READ FROM WIRE END ONLY.
3. VIOLET,BLACK,BROWN,AND BLUE COLORED BLOCKS TO BE STAMPED WITH WHITE CHARACTERS. ALL OTHER COLORED BLOCKS TO BE STAMPED WITH BLACK CHARACTERS.

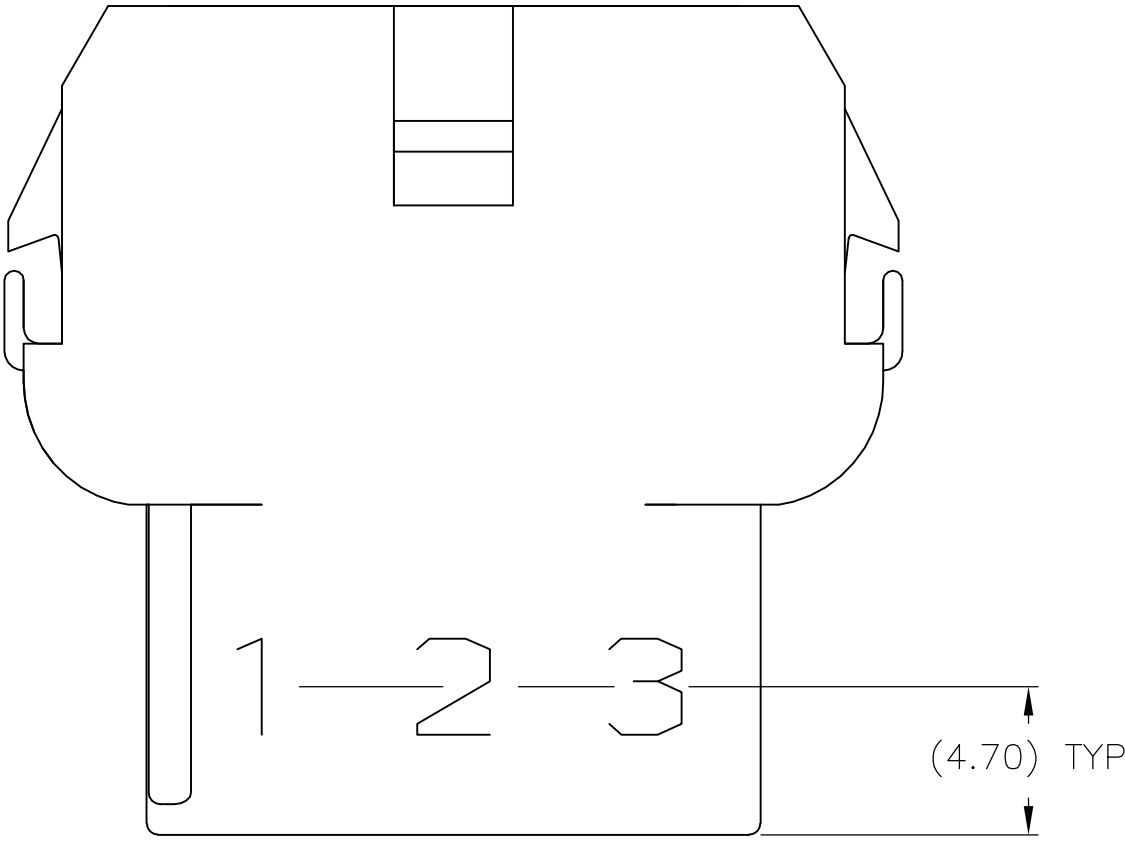

5.08	.200	-	-
4.70	.185	33.02	1.300
3.18	.125	27.43	1.080
0.38	.015	25.91	1.020
0.25	.010	20.32	.800
0.13	.005	8.13	.320
MM	IN	MM	IN
CONVERSION TABLE			

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER	29JUL2004	 TE Connectivity			
		CHK S. RIDGILL	29JUL2004				
DIMENSIONS:		APVD S. RIDGILL	29JUL2004	NAME	CAP, 15 CIRCUIT, UNIVERSAL MATE-N-LOK TM		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC					
	0 PLC	± -	APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
	1 PLC	± -					
	2 PLC	± 0.13					
	3 PLC	± -					
	4 PLC	± -					
ANGLES		± 0°30'					
FINISH		-	WEIGHT	-	A1		
MATERIAL		CUSTOMER DRAWING		SCALE		SHEET	
NYLON, UL94V-2				4:1		2 OF 2	
						REV	
						A/J3	