


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect

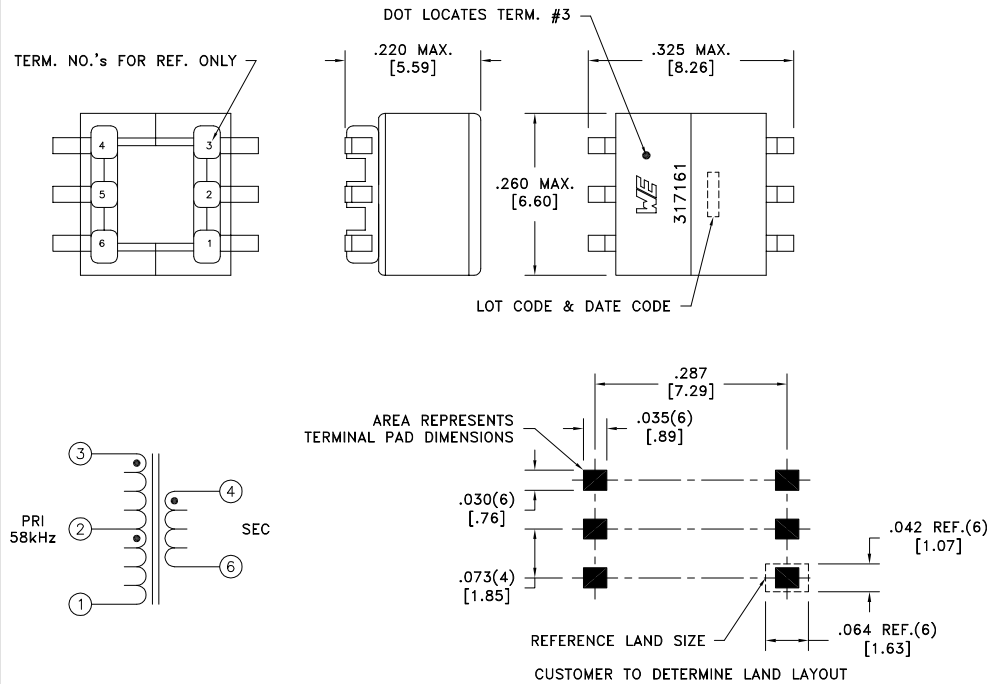


ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-3 @20°C	1.580 ohms ±10%
D.C. RESISTANCE	4-6 @20°C	8.120 ohms ±10%
INDUCTANCE	4-6 58kHz, 1.0VAC, Ls	3.00mH ±10%
DIELECTRIC	3-4 500VAC, 1 second	500VAC, 1 minute
TURNS RATIO	(4-6):(2-1)	8.42:1, ±1%
TURNS RATIO	(2-1):(3-2)	1:1, ±1%

GENERAL SPECIFICATIONS:
 OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.
 Safety standard undefined.

Wire insulation & RoHS status not affected by wire color.
 Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications	 CONVENTION PLACEMENT	Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 [.13] Fractions: ±1/64 Footprint: ±.005 [.13]	DRAWING TITLE	PART NO.
		Method: Tape & Reel PKG-0637 www.we-online.com/midcom			TRANSFORMER	750317161
6A	12/17	SEE REVISION SHEET FOR REVISION LEVEL		This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750317161	SPECIFICATION SHEET 1 OF 1

