
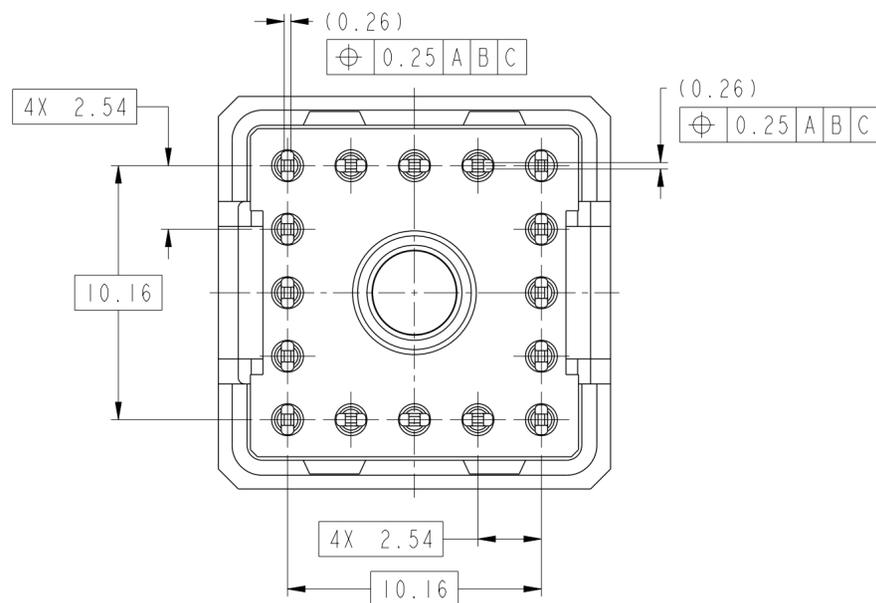
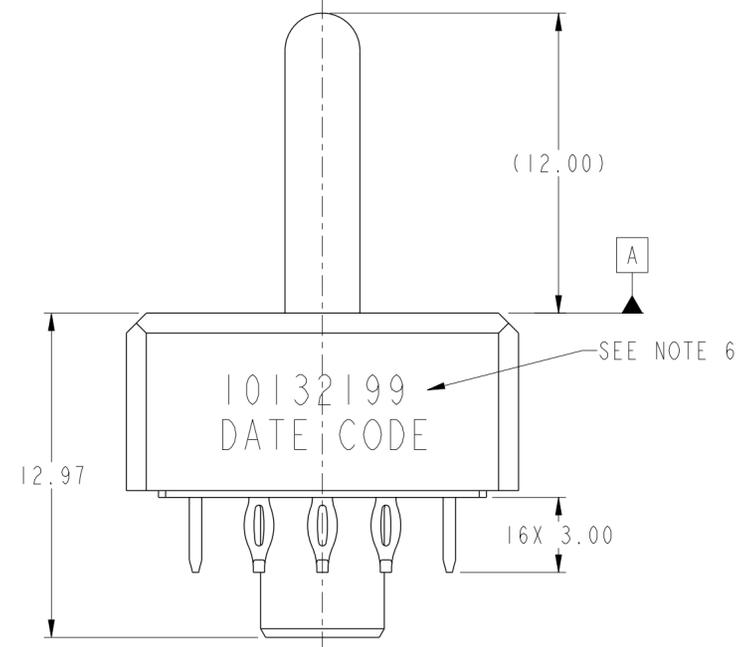
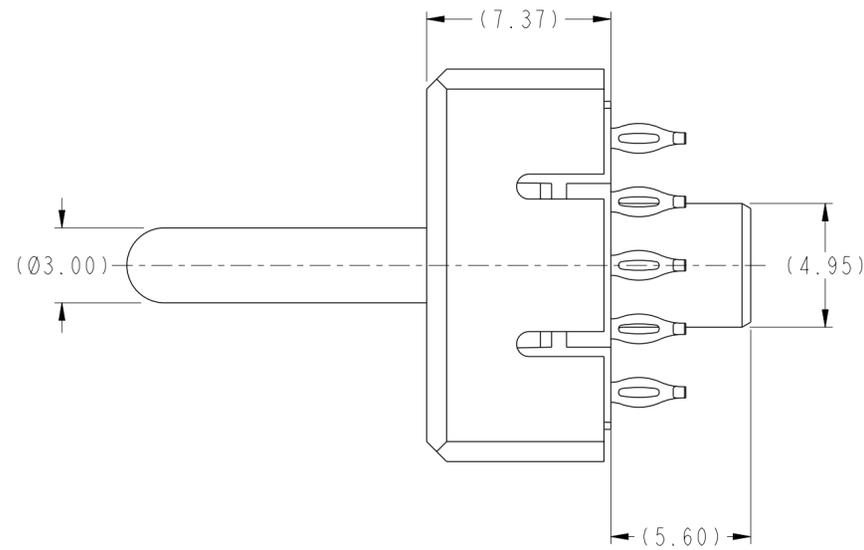



PART NUMBER
10132199-001LF

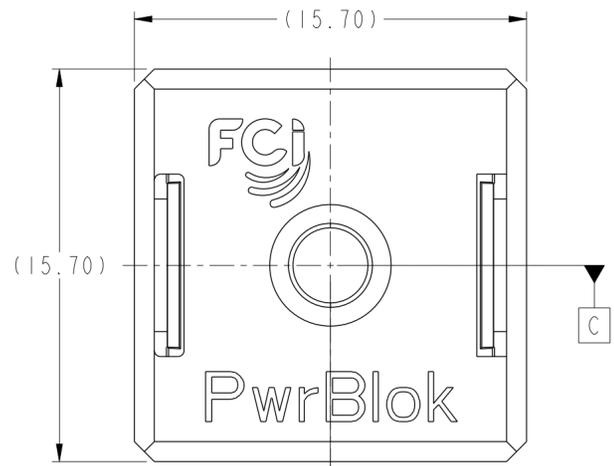

NOTES

- MATERIAL:
PIN: CU ALLOY
EON CONATCT: CU ALLOY
BODY: ZN ALLOY
COVER: THERMOPLASTIC, UL 94V-0
- PLATING:
PIN: 2.54μm AG OVER 1.27μm NI
EON CONTACT: 2.54μm SN OVER 1.27μm NI
BODY: 2.54μm AG OVER 1.27μm NI
- INSTALLATION: FLAT ROCK TOOLING PER APPLICATION SPEC GS-20-0424.
- PERFORMANCE: PER PRODUCT SPEC GS-12-1260.
- MIN PCB THICKNESS= 1.5mm
- PRINTING INFORMATION:
DATE CODE: YEARWEEK (FOR EXAMPLE: 201522)
- THE PRODUCT MEET EUROPEAN UNION DIRECTIONS AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008

spec ref	-	dr	N Eppley	2015/03/07	projection	mm	size	A2	scale	5:1
tolerance std	ASME Y14.5M	eng	Li-Qing Lei	2018/02/23			ecn no	ELX-N-29054-1	rel level Released	sheet 1 of 2
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	-	appr			Tim Yao	2018/03/06		
surface	ASME Y14.5M	linear	0.X	±0.30			Amphenol FCI www.fci.com		title 3mm Plug PwrBlok Plug	rev B
		angular	0°	±2°	cat. no.		Product - Customer Drw		rev B	

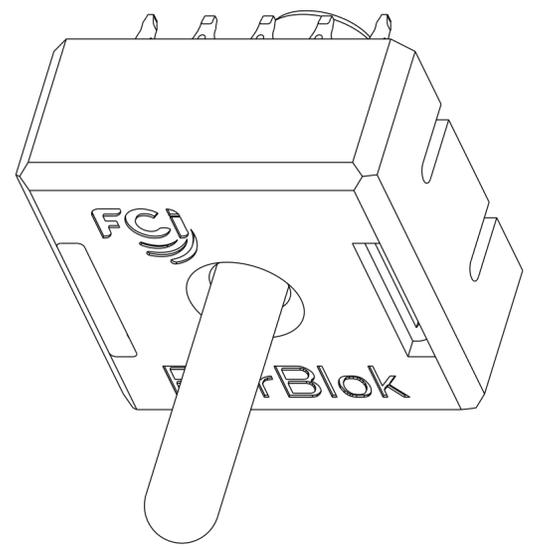


TO AVOID DAMAGE DURING INSTALLATION:

DO NOT PRESS ON PIN TO SEAT CONNECTOR INTO PCB/BUSBAR.

ONLY PRESS ON HATCHED SURFACE SHOWN.

INSTALLATION REQUIREMENT

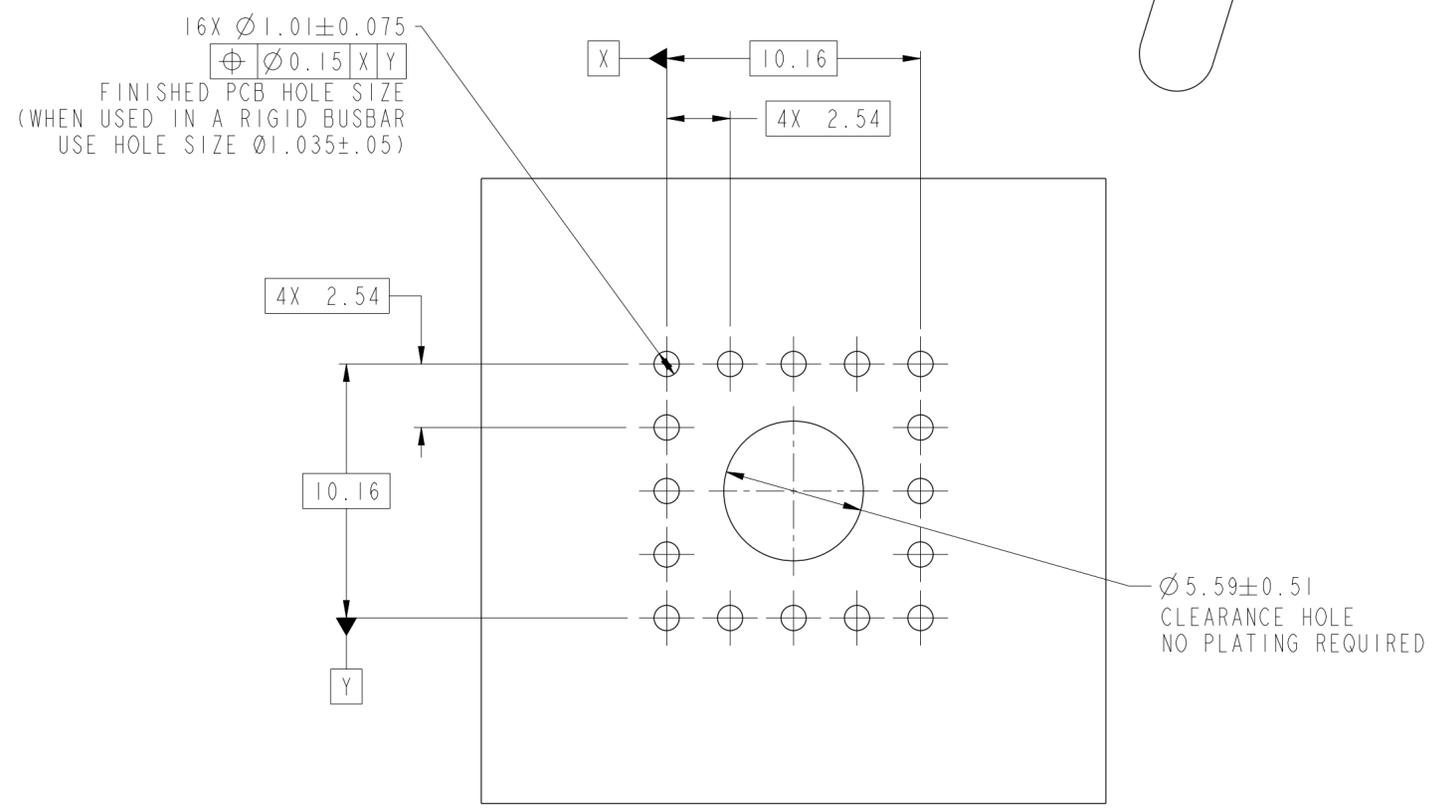

RECOMMENDED PC BOARD LAYOUT

Amphenol
FCi

© 2016 APCI

spec ref	-	dr	N Eppley	2015/03/07	projection	mm	size	A2	scale	5:1									
tolerance std	ASME Y14.5M	eng	Li-Qing Lei	2018/02/23		mm	ecn no	ELX-N-29054-1	rel level	Released									
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	-	appr							Tim Yao	2018/03/06	product family	Pwrblok					
surface	<table border="1"> <tr> <td>linear</td> <td>0.X</td> <td>± 0.30</td> </tr> <tr> <td></td> <td>0.XX</td> <td>± 0.20</td> </tr> <tr> <td></td> <td>0.XXX</td> <td>± 0.10</td> </tr> <tr> <td>angular</td> <td>0°</td> <td>$\pm 2^\circ$</td> </tr> </table>	linear	0.X	± 0.30								0.XX	± 0.20		0.XXX	± 0.10	angular	0°	$\pm 2^\circ$
linear	0.X	± 0.30																	
	0.XX	± 0.20																	
	0.XXX	± 0.10																	
angular	0°	$\pm 2^\circ$																	