



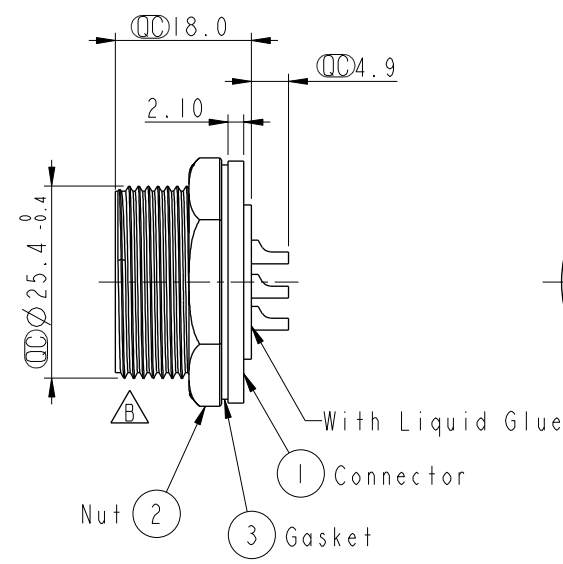




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN1730338	2017/03/23	Vicky	Update Logo
D	LEN1840062	2018/04/13	Ethan	Modify Panel Thickness
E	CI90314	2019/03/12	Ruru	Modify Note

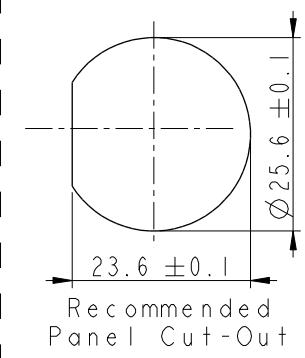

Pin Assignments
Front View

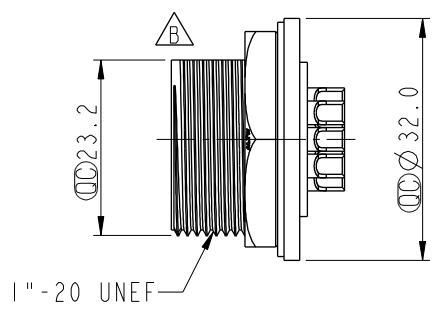

- Note:  Important Dimension
- * Waterproof Rate: IP67, Unmated
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Nut: Thermoplastic, Black
 - * Gasket: Rubber, Black
 -  * Use Waterproof Cap or Dust Cap
Panel Thickness Max: 1.8mm
 -  * Use without Waterproof Cap or Dust Cap
Panel Thickness Max: 3.0mm
 - * Gasket and Nut are packed separately in PE bags.

UNIT:mm		TITLE Screw Type Connector For Panel Mount 7Pin Male Connector Male Pin(20A)			ITEM NO DC-07PMMS-SC7001		DRAWN BY Ruru		DATE 2019-03-12	
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		SCALE 1:1	SIZE A4	SHEET 1 OF 1	DWG NO DC-07PMMS-SC7001		CHECKED BY Rita		DATE 2019-03-12	
REV. E		WC-REV. A.3	 Inspection item		CUSTOMER ALTW		APPROVED BY Max		DATE 2019-03-12	

Amphenol LTW
安費諾亮泰企業股份有限公司