


24-Outlet Power Strip with Industrial Surge Protector, 15-ft. Cord, 1650 Joules, 72 in. length

MODEL NUMBER: **SS7619-15**

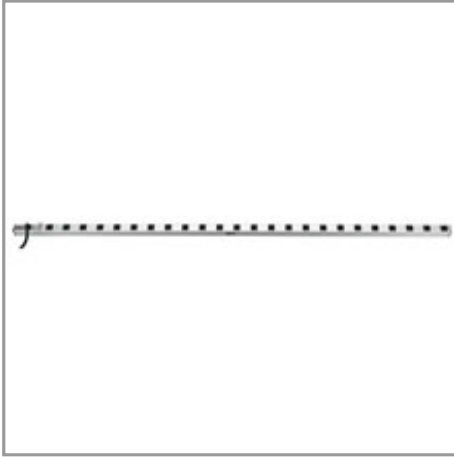

Highlights

- 24 outlets
- 15-ft. cord
- 72-in. length
- 1650-joule rating

Package Includes

- SS7619-15 Power Strip/Surge Suppressor
- Set of adjustable mounting clips
- Warranty information
- Instruction manual

Description

The SS7619-15 6-ft. power strip with AC surge suppression offers a convenient method of horizontal or vertical power distribution in equipment racks, computer rooms, workbenches, raceways and more. Includes 24 NEMA 5-15R output receptacles with 2.795-in. center-to-center spacing, 15-ft. AC line cord and adjustable mounting clips for installation in a wide variety of applications. Protects connected equipment from transient surges and line noise with built-in surge suppression rated at 1650 joules. Corded, multi-outlet strip reduces cabling clutter and enables the connection of multiple electrical devices to a single AC wall socket. Features rugged all-metal housing, lighted power switch with transparent guard to prevent accidental shutoff, 15A resettable circuit breaker and attractive gray color scheme.

PLUG/OUTLETS: Input: NEMA 5-15P/Output: 24 NEMA 5-15R

ELECTRICAL: 120V AC, 50/60Hz, 15A (Requires standard NEMA 5-15R wall receptacle)

FORMAT: 6-ft. corded vertical/raceway power distribution strip

SURGE SUPPRESSION: 1650 joules

Features

- Long 6-ft./72-in. strip offers convenient power distribution and surge suppression in equipment racks, computer rooms, workbenches, raceways and more
- Includes 24 NEMA 5-15R output receptacles with 2.795-in. center-to-center outlet spacing
- Lighted power switch with transparent snap-over guard to prevent accidental shutoff with integrated 15 amp circuit breaker
- Adjustable mounting clips support installation in a variety of applications
- UL1363/1449 - 400V (USA), cUL (Canada)
- 15A power handling capacity with circuit breaker
- 1650-joule AC surge suppression



- 15-ft. AC line cord

Specifications

| OUTPUT | |
|----------------------------------------------|----------------------------------------------------------------------------------------------------|
| Frequency Compatibility | 50 / 60 Hz |
| Output Receptacles | (24) 5-15R |
| Output (Watts) | 1800 |
| Circuit Breaker (amps) | 15A |
| Outlet Spacing | 2.795-in. (center to center) |
| Right-Angle Outlets | 0 |
| INPUT | |
| Nominal Input Voltage(s) Supported | 120V AC |
| Recommended Electrical Service | 120V |
| Input Connection Type | NEMA 5-15P |
| Input Cord Length (ft.) | 15 |
| Input Cord Length (m) | 4.57 |
| Input Cord Gauge Type | 14 gauge, SJT |
| Voltage Compatibility (VAC) | 120 |
| Maximum Surge Amps | 22000 |
| Right-Angle Plug | 0 |
| USER INTERFACE, ALERTS & CONTROLS | |
| Switches | Combination AC circuit breaker and lighted two-position power switch controls power to all outlets |
| Locking Switch Cover | Transparent locking switch cover prevents accidental shutoff |
| SURGE / NOISE SUPPRESSION | |
| AC Suppression Joule Rating | 1650 |
| UL1449 Let Through Rating | 400V UL Verified |
| DATALINE SURGE SUPPRESSION | |
| Telephone/DSL Protection | 0 |
| Cable (Coax) Protection | 0 |
| Network (Ethernet) Protection | 0 |



| PHYSICAL | |
|----------------------------------------|-----------------------------------|
| Unit Dimensions (hwd / in.) | 72 x 1.5 x 1.5 |
| Unit Dimensions (hwd / cm) | 182.9 x 3.8 x 3.8 |
| Material of Construction | Metal |
| Included Mounting Accessories | Set of adjustable mounting clamps |
| Receptacle Color | Black |
| Color (AC Line Cord) | Black |
| Outlets Measurement (Center to Center) | 69mm |
| CERTIFICATIONS | |
| UL1449 3rd Edition (AC Suppression) | UL1449 3rd Edition |
| UL1363 (Power Tap) | UL1363 |
| cUL / CSA (Canada) | cUL |
| WARRANTY | |
| Product Warranty Period (Worldwide) | Lifetime limited warranty |

© 2017 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: <https://www.tripplite.com/products/product-certification-agencies>