
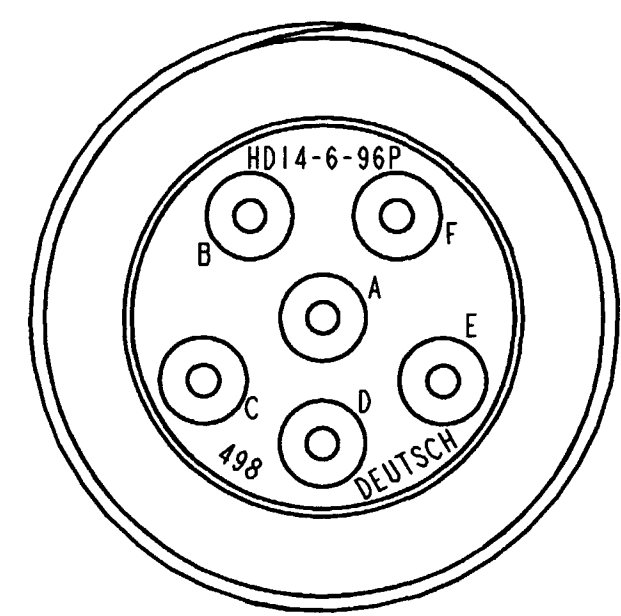
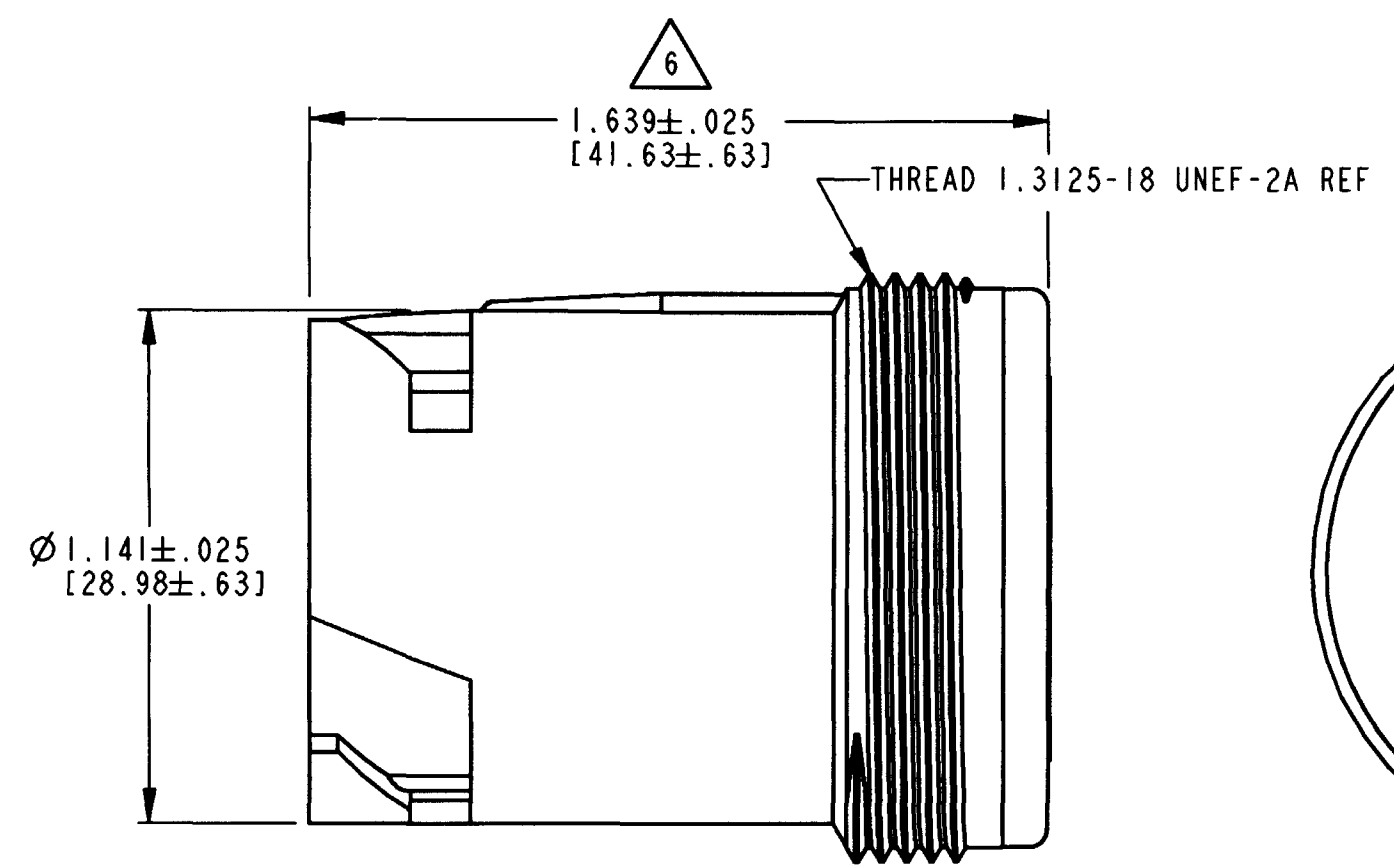
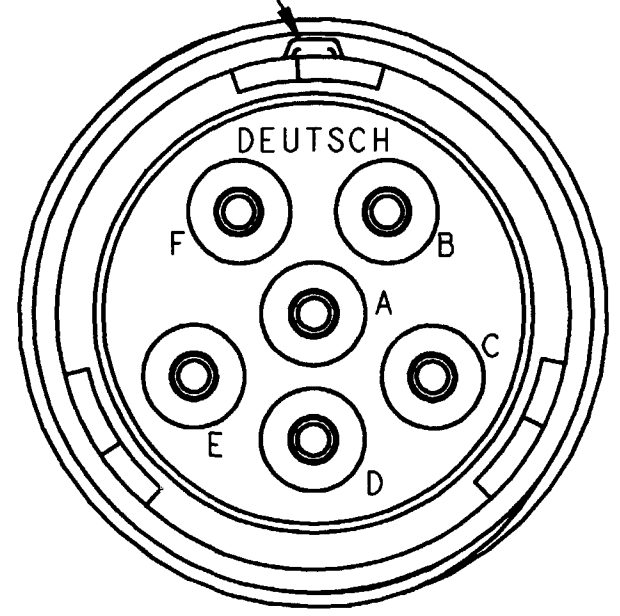


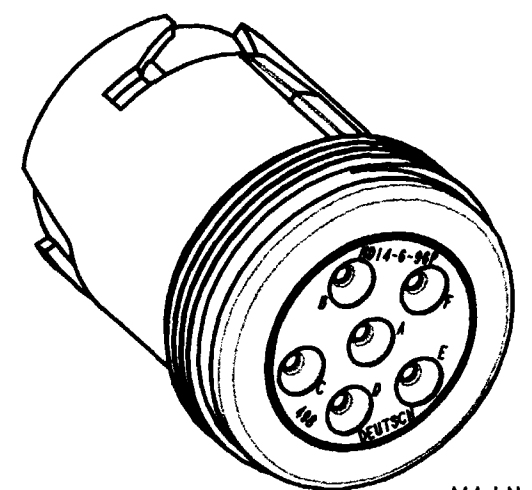

REV	F	HD14-6-96P	REVISIONS			
			SYM	DESCRIPTION	DATE	APPROVED
			C	REVISED PER E.O. A5819	04/21/87	J.R.A.
			D	REVISED PER E.O. A6839	07/01/87	J.R.A.
			E	REVISED & REDRAWN PER E.O. P16261	09/17/99	R.D.R.
			F	REVISED PER E.O. P17742	12-27-02	RDR

- FOR "PERFORMANCE AND APPLICATION CHARACTERISTICS OF SOLID/STAMPED AND FORMED CONTACTS AND WIRES," SEE ENVELOPE DRAWING 0425-015-0000. THIS RECEPTACLE USES PIN CONTACTS ONLY.
- ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
- THIS CONNECTOR SERIES WILL ACCOMMODATE THE FOLLOWING WIRE INSULATION DIAMETERS:

CONTACT SIZE	MINIMUM O.D.	MAXIMUM O.D.
16	.100 [2.54]	.150 [3.81]

1. CONSULT FACTORY FOR ELECTRICAL AND MATERIAL SPECIFICATIONS.

- MATERIAL: SHELL: PLASTIC; SEAL: RUBBER.
- OVERALL DIMENSION DOES NOT INCLUDE RUBBER GROMMET.
- THIS RECEPTACLE MATES WITH HD16-6-96S*-**** PLUG (* = SEAL TYPE, **** = ALL MODIFICATIONS).

SIGNATURE & DATE		RECEPTACLE CONNECTOR INLINE HD10 SERIES ARR. 6-96 COLOR: GREY	CP		MATL. CODE	
DR	J. HAYNES 08/30/99		The Deutsch Company  DEUTSCH I.P.D. 3850 INDUSTRIAL AVE. HEMET, CALIF. 92545			
CHK	Paul B. 12/1/02					
PE	Spand 12-9-02					
				B	HD14-6-96P	
APPD	R. Reed 12-27-02					
SCALE	NONE	WT		DWG SIZE	CODE 11139	SHEET 1 OF 1