


# 2 “AA” Battery Holder with Leads

12BHC321A-GR


Date Last Revised: 7-2-15

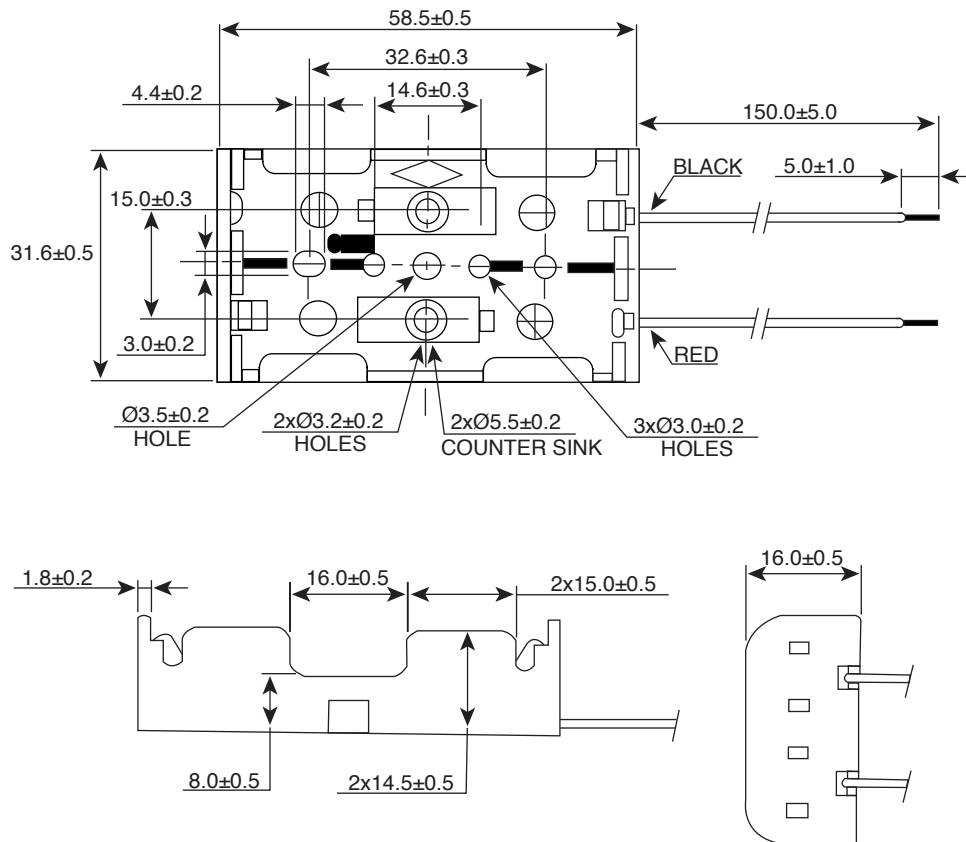


Dimensions: mm

## Contact & Wire Assembly


Anode Contact & Wire Combination



Cathode Contact & Wire Combination



Cathode Anode: Spring Steel Nickel Plated



## SPECIFICATIONS

|                          |  |
|--------------------------|--|
| <b>Wire:</b>             | AWG #26<br>Black and Red: 150mm±5mm<br>Strip and Tin: 5mm±1mm  |
| <b>Holder Material:</b>  | P.P. Resin, Black Color  |
| <b>Contact Material:</b> | Anode: 0.25mm Thick Brass Nickel Plated<br>Cathode: 0.25mm Thick Brass Nickel Plated<br>Cathode Anode: 0.20mm Thick Spring Steel Nickel Plated |
| RoHS Compliant           |  |

Available from Mouser Electronics  
1-800-346-6873 / [www.mouser.com](http://www.mouser.com)

EPD-200934

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.