

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


| PANDUIT<br>PART NUMBER | STUD<br>SIZE | DIMENSIONS - in. |                |                |                 |                | TOOLS                                                   |
|------------------------|--------------|------------------|----------------|----------------|-----------------|----------------|---------------------------------------------------------|
|                        |              | A<br>± .03       | W<br>± .01     | C<br>± .02     | M<br>± .03      | H<br>± .01     |                                                         |
| PV6-8R                 | #8           | 1.61<br>(40.89)  | .47<br>(11.94) | .43<br>(10.92) | 1.38<br>(35.05) | .18<br>(4.57)  | CT-720<br>(CD-720PV8-2)<br><br>CT-2600<br>(CD-2600-PV6) |
| PV6-10R                | #10          | 1.62<br>(41.15)  | .47<br>(11.94) | .43<br>(10.92) | 1.38<br>(35.05) | .20<br>(5.08)  |                                                         |
| PV6-14R                | 1/4"         | 1.65<br>(41.91)  | .47<br>(11.94) | .48<br>(12.19) | 1.38<br>(35.05) | .27<br>(6.86)  |                                                         |
| PV6-56R                | 5/16"        | 1.74<br>(44.20)  | .62<br>(15.75) | .53<br>(13.46) | 1.44<br>(36.58) | .33<br>(8.38)  |                                                         |
| PV6-38R                | 3/8"         | 1.74<br>(44.20)  | .62<br>(15.75) | .51<br>(12.95) | 1.44<br>(36.58) | .40<br>(10.16) |                                                         |
| PV6-12R                | 1/2"         | 1.84<br>(46.74)  | .82<br>(20.83) | .51<br>(12.95) | 1.44<br>(36.58) | .52<br>(13.21) |                                                         |

# NOTES:

- cULus LISTED FOR:
  - 600V MAX VOLTAGE RATING
  - 221° F (105° C) MAX TEMP RATING
  - #6 AWG STRANDED COPPER WIRE
- SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES
- MATERIAL:
  - STAMPING - .045" (1.14) THK, COPPER  
TIN PLATED
  - HOUSING - VINYL, BLUE
- DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
- WIRE STRIP LENGTH: 7/16 + 1/32 (11.1 + .8)  
- 0 - 0



LISTED  
587H  
E52164

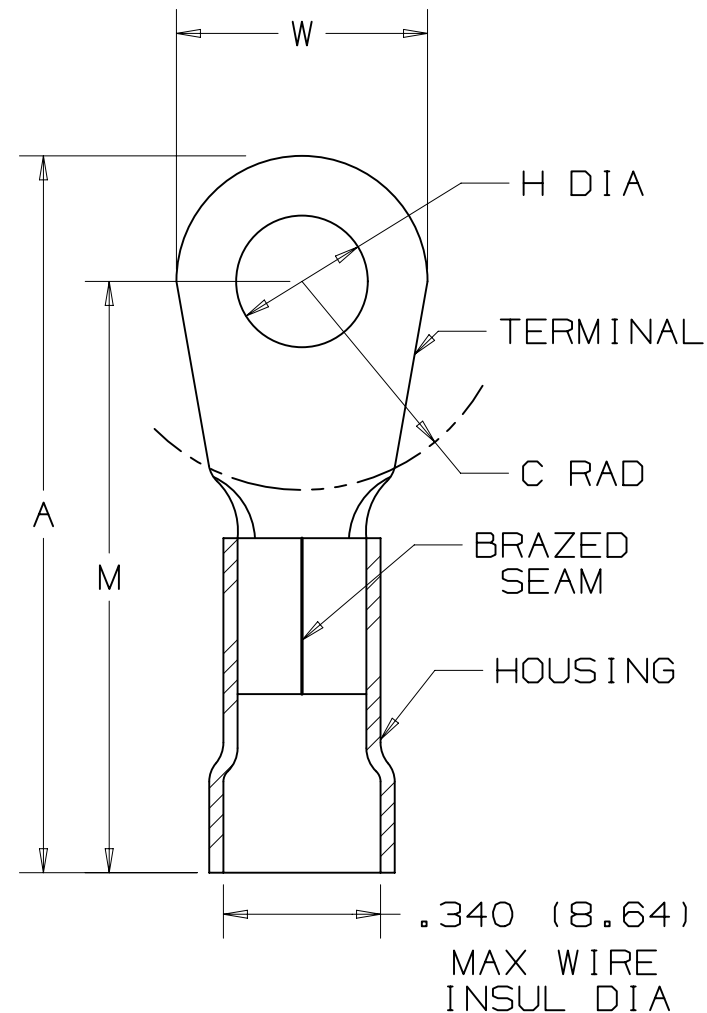

|    |       |     |      |     |                                                                                    |                 |
|----|-------|-----|------|-----|------------------------------------------------------------------------------------|-----------------|
|    |       |     |      |     |                                                                                    |                 |
|    |       |     |      |     |                                                                                    |                 |
|    |       |     |      |     |                                                                                    |                 |
|    |       |     |      |     |                                                                                    |                 |
|    |       |     |      |     |                                                                                    |                 |
|    |       |     |      |     |                                                                                    |                 |
|    |       |     |      |     |                                                                                    |                 |
|    |       |     |      |     |                                                                                    |                 |
| 07 | 06/14 | MBY | JHNU | RGB | REVISED UL LOGO TO cULus LOGO, REVISED NOTES, MOVED TOOLS TO TABLE, UPDATED BORDER | N41218BB-A41218 |

|                                                                                                       |      |                           |               |
|-------------------------------------------------------------------------------------------------------|------|---------------------------|---------------|
| TITLE<br>#6 BARREL VINYL INSULATED RING TONGUE<br>.340 [ 8.64 ] MAX. WIRE INSUL. DIAMETER             |      |                           |               |
| CUSTOMER DRAWING                                                                                      |      |                           |               |
| ITEM REVISION NAME<br>N41218BB/07                                                                     |      | <b>PANDUIT</b>            |               |
| DATASET FILE NAME<br>N41218BB/07                                                                      |      |                           |               |
| UNLESS OTHERWISE SPECIFIED,<br>DIMENSIONAL TOLERANCES ARE: IN [ mm ]<br>.X ± .XXX ±<br>.XX ± ANGLES ± |      | MATERIAL:<br>SEE NOTE 3   |               |
| THIRD ANGLE PROJECTION                                                                                |      | DRAWING NUMBER:<br>A41218 |               |
| DRAWN BY<br>DAW                                                                                       | DATE | CHK                       | SCALE<br>NONE |
| SHT 1 OF 1                                                                                            |      | SIZE<br>A                 |               |