

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0522712979

Status:

Active

Overview:

Description:

1.00mm (.039") Pitch FFC/FPC Connector, Right Angle, SMT, ZIF, Bottom Contact Style, 29 Circuits, Lead-free, High Barrier Packaging

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

52271Series

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	FFC/FPC Connectors
Series	52271
Overview	ffc_fpc_smt
Product Name	N/A

Physical

Circuits (Loaded)	29
Color - Resin	Natural
Contact Position	Bottom
Durability (mating cycles max)	30
Entry Angle	90° Angle
Flammability	94V-0
Mated Height (in)	0.118 In
Mated Height (mm)	3.00 mm
Material - Metal	Phosphor Bronze
Material - Plating Mating	Tin-Bismuth
Material - Plating Termination	Tin-Bismuth
Material - Resin	Nylon
Number of Rows	1
Orientation	Right Angle
PCB Locator	No
PCB Retention	Yes
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface (in)	0.039 In
Pitch - Mating Interface (mm)	1.00 mm
Polarized to PCB	Yes
Stackable	No
Temperature Range - Operating	-40°C to +85°C
Termination Interface: Style	Surface Mount
Wire/Cable Type	FFC/FPC

Electrical

Current - Maximum per Contact	0.5A
Voltage - Maximum	50V AC (RMS)/DC

Material Info


Reference - Drawing Numbers

Application Specification	AS-52271-001
Packaging Specification	SPK-52271-001, SPK-52271-002
Product Specification	PS-52271-053, RPS-52271-066, RPS-52271-067, RPS-52271-069, RPS-52271-070, RPS-52271-072, RPS-52271-073, RPS-52271-075, RPS-52271-080, RPS-52271-085, RPS-52271-087, RPS-52271-091
Sales Drawing	SD-52271-036, SD-52271-037

This document was generated on 06/04/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION



ターミナル
TERMINAL

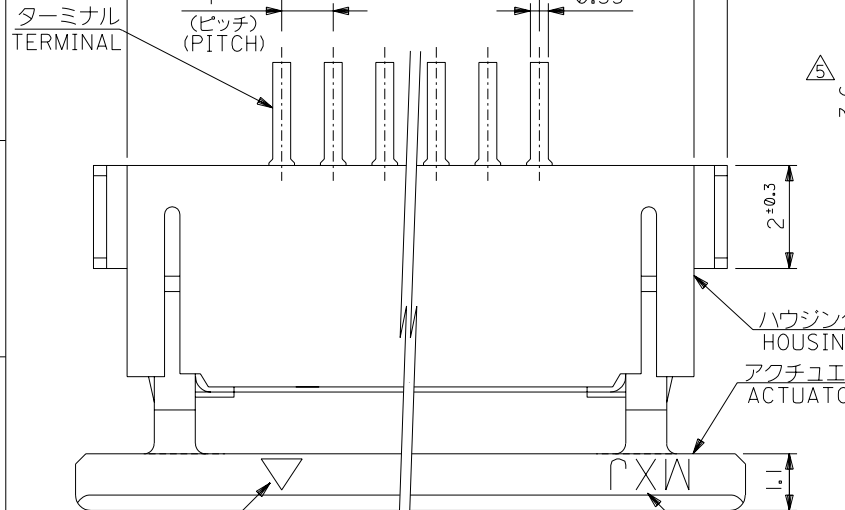



回路番号1用マーク
CKT. NO.1 MARK

トレードマーク
TRADE MARK
接点部 (下面)


CONTACT POINT (BOTTOM SIDE)

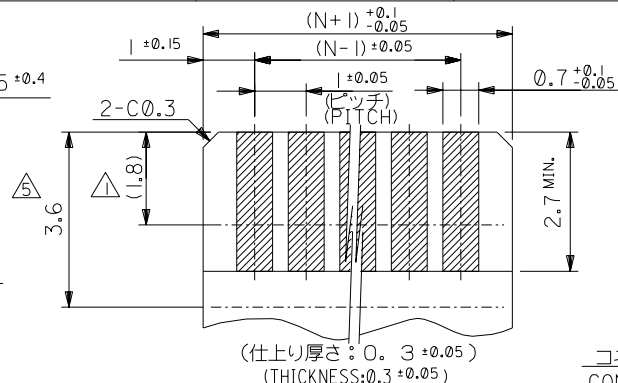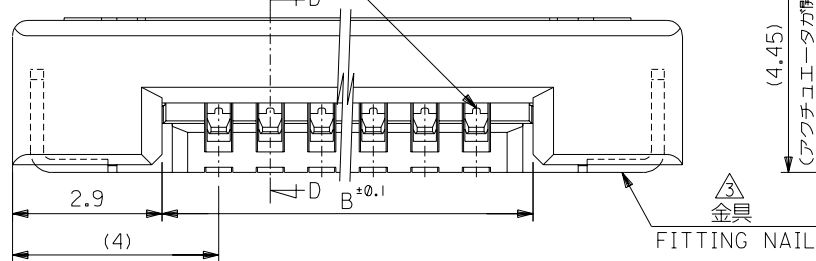

適合FPC推奨寸法
RECOMMENDED APPLICABLE
FPC LAYOUT
(7.15)

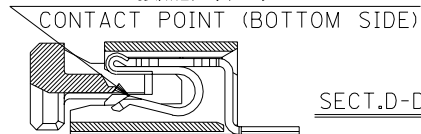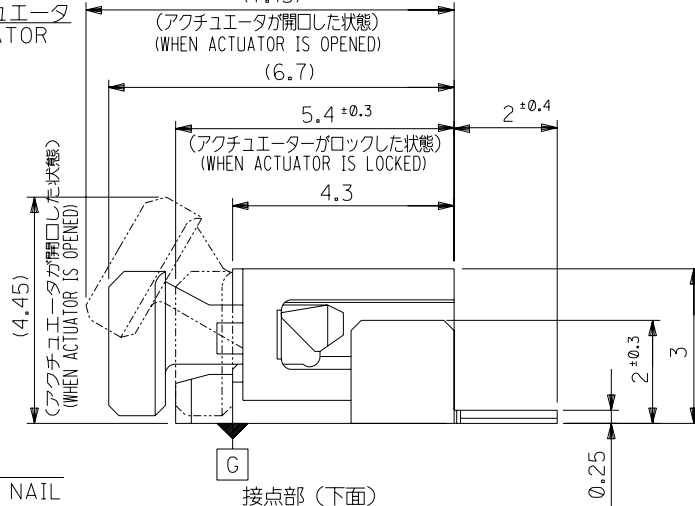

コネクタ位置
CONNECTOR
POSITION

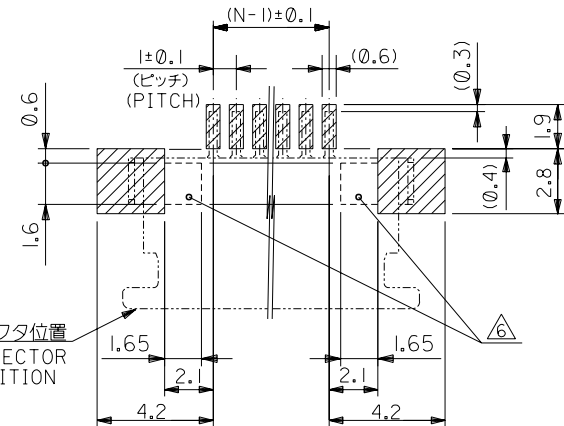

パターン推奨寸法 (参考)
RECOMMENDED PATTERN DIM. (REF.)

35	31.2	29	52271-3019	30
34	30.2	28	-2919	29
33	29.2	27	-2819	28
32	28.2	26	-2719	27
31	27.2	25	-2619	26
30	26.2	24	-2519	25
29	25.2	23	-2419	24
28	24.2	22	-2319	23
27	23.2	21	-2219	22
26	22.2	20	-2119	21
25	21.2	19	-2019	20
24	20.2	18	-1919	19
23	19.2	17	-1819	18
22	18.2	16	-1719	17
21	17.2	15	-1619	16
20	16.2	14	-1519	15
19	15.2	13	-1419	14
18	14.2	12	-1319	13
17	13.2	11	-1219	12
16	12.2	10	-1119	11
15	11.2	9	-1019	10
14	10.2	8	-0919	9
13	9.2	7	-0819	8
12	8.2	6	-0719	7
11	7.2	5	-0619	6
10	6.2	4	-0519	5
9	5.2	3	52271-0419	4
52271-**-19				
MODEL NO.	C	B	A	極数 CKT.

材料 MATERIAL	注記参照 SEE NOTES
仕上げ FINISH	注記参照 SEE NOTES
適用電線範囲 WIRE RANGE	—
被覆外径 INS. RANGE	—
DRAWN BY 04/03/12 H.KAWABATA	CHK'D BY 04/03/12 K.TOJO
APP'D BY 04/03/12 M.SASAO	尺度 SCALE

molex MOLEX-JAPAN CO.,LTD. 日本モレックス株式会社
REVISE ONLY ON CAD SYSTEM
TITLE 名称 1.0 FPC CONN. Z.I.F. SMT (BOTTOM CONTACT)
-LEAD FREE-
DWG. NO. (SHEET 1 OF 2) REV SD-52271-036 B

角度 ANGLE	±3°
30 以上 OVER	+0.3
10 以上 30 未満 OVER UNDER	+0.25
10 未満 UNDER	+0.2
一般公差 GENERAL TOLERANCES	
記号 LTR	変更内容 REVISION RECORD
DR. CHK.	日付 DATE

DWG. NO. SD-52271-036

E

D

±MM DIMENSIONS IN METRIC DO NOT SCALE DRAWING

A

8

7

6


5

4

3

2

1

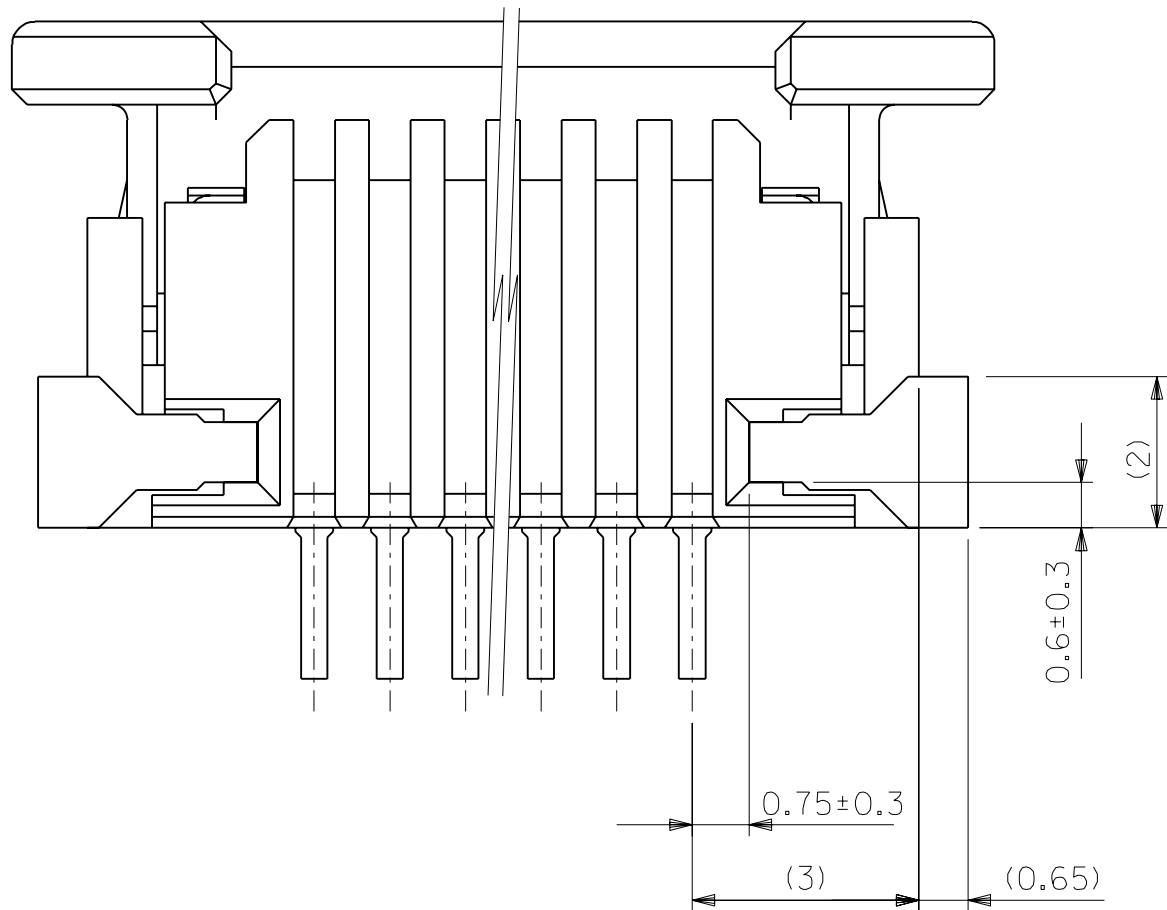

注記 NOTES

- ① 接点部までの嵌合長さ。
LENGTH TO CONTACT POINT.
2. 使用材料 MATERIAL
ハウジング : 46ナイロン, UL94V-0
HOUSING : 46NYLON, UL94V-0
アクチュエータ : PPS, UL94V-0
ACTUATOR : PPS, UL94V-0
ターミナル : リン青銅 (t=0.25)
TERMINAL : PHOS-BRO.(t=0.25)
メッキ : 錫ビスマスメッキ 1.0マイクロメートル以上
PLATING : TIN-BISMUTH 1.0 MICROMETER MINIMUM
: ニッケル下地 1.0マイクロメートル以上
PLATING : NICKEL(UNDER PLATING)1.0 MICROMETER MINIMUM
金具 : 銅合金 (t=0.25)
FITTING NAIL : COPPER ALLOY (t=0.25)
メッキ : 錫メッキ 1.0マイクロメートル以上
PLATING : TIN 1.0 MICROMETER MINIMUM
: ニッケル下地 1.0マイクロメートル以上
PLATING : NICKEL(UNDER PLATING) 1.0 MICROMETER MINIMUM
- ③ パターンはくり止め用金具
FITTING NAIL FOR PREVENTION OF PEELING OF P.C.B.PATTERN.
4. エンボステープ梱包時は、アクチュエータがロックした状態とする。
WHEN CONNECTOR IS SHIPED, ACTUATOR SHOULD BE LOCKED.
- ⑤ FPC挿入深さ。
INSERTION DEPTH OF FPC
- ⑥ パターン書き込み禁止エリア。
NO FOOT PRINT AREA.
7. 本製品は52271-**-17の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 52271-**-17.

FPCについて：
打抜き方向は導体側から補強板側を推奨致します。
補強フィルム材質はポリイミドを推奨致します。
接着剤は熱硬化接着剤を推奨致します。

ABOUT FPC:
RECOMMENDED PUNCHER DIRECTION :FROM CONDUCTOR SIDE TO STIFFENER BOARD SIDE.
RECOMMENDED MATERIAL :
STIFFENER FILM :POLYIMIDE
BONDING AGENT :THERMOSETTING BONDING AGENT

				MODEL NO.		52271-**-19	
				材料 MATERIAL	注記参照 SEE NOTES	molex MOLEX-JAPAN CO.,LTD. 日本モレックス株式会社	
				仕上げ FINISH	注記参照 SEE NOTES	REVISE ONLY ON CAD SYSTEM	
				適用電線範囲 WIRE RANGE	—//—	TITLE 名称 1.0 FPC CONN. Z.I.F. SMT (BOTTON CONTACT) -LEAD FREE-	
				被覆外径 INS. RANGE	—//—	DWG. NO. (SHEET 2 OF 2) REV SD-52271-036 B	
				DRAWN BY '04/03/12 H.KAWABATA	CHK'D BY '04/03/12 K.TOJO		
				APP'D BY '04/03/12 M.SASAO	尺度 SCALE —//—		
角度 ANGLE	±3°			記号 LTR	変更内容 REVISION RECORD	DR. CHK.	日付 DATE
30 以上 OVER	±0.3	B	変更 REVISED (J2004-355)	H.K.	K.T.	04/04/02	
10 以上 30 未満 OVER 30 UNDER	±0.25	A	変更 REVISED (J2004-337)	H.K.	K.T.	04/03/25	
10 未満 UNDER	±0.2	O	新規作成 RELEASED (J2004-3059)	H.K.	K.T.	04/03/12	
一般公差 GENERAL TOLERANCES							

8

7

6

5

4

3

2


1

NOTES

1. 製品番号 52271-**-19 の梱包状態はアクチュエータがロックした状態とする。
IN THE PACKAGE, ACTUATOR OF PART NO. 52271-**-19 SHOULD BE LOCKED
RE DETAILED DIMENSIONS, SEE SD-52271-036.

2. 梱包数量: 1000個/リール
NUMBER OF CONNECTORS: 1000 PCS/REEL

3. リードテープ長さ LEAD TAPE LENGTH

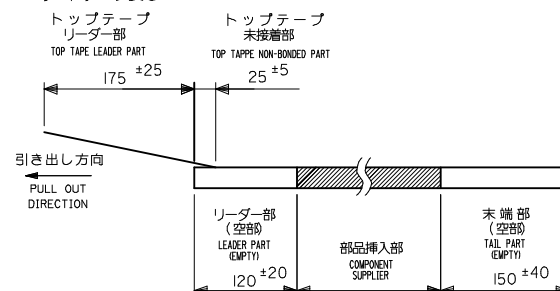

4. トップテープの剥離強度: 0.1~1.3N {10~130gf} (剥離方向は下図参照)
尚、本規格値は、出荷時に適用。(但し、輸送時に剥離が発生しない事。)

PEELING OFF FORCE OF TOP TAPE: 0.1~1.3N {10~130gf}
(PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)

THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT

PEEL OFF SHOULD NOT BE ALLOWED, DURING TRANSPORTATION



5. 材料 (MATERIAL)

キャリアテープ (CARRIER TAPE): ポリプロピレン (POLYPROPYLENE)

トップテープ (TOP TAPE): PET, PE, PEF

リール (REEL): ポリスチレン (PS) <リサイクル材を含む>



POLYSTYRENE (PS) <RECYCLE MATERIAL CONTAINED>

6. 本製品は52271-**-90の鉛フリー品である。


THIS PRODUCT IS LEAD FREE OF 52271-**-90.

7. 本製品は乾燥剤入り、ハイバリア梱包仕様である。

THIS PRODUCT IS HIGH BARRIER PACKAGE
WITH DESICCANT.

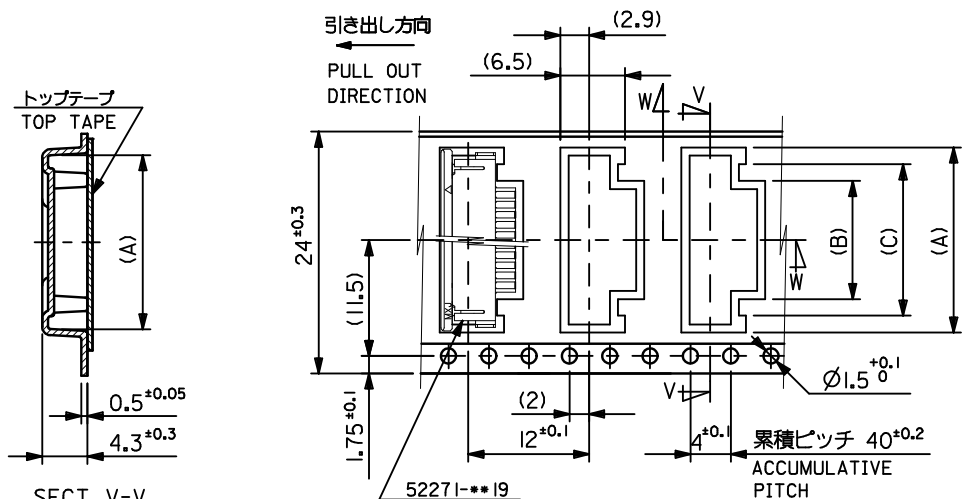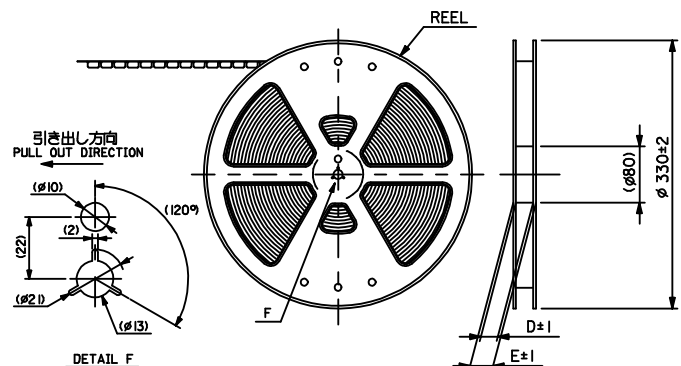




SECT. V-V

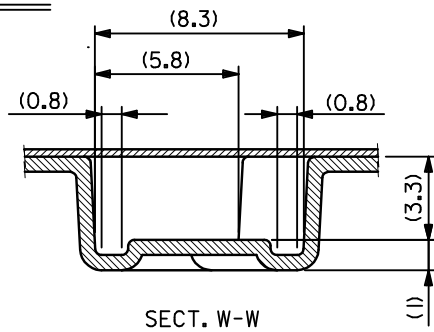

SECT. W-W

52271-**-19	24	29.4	25.4	15	11.4	18.3	52271-1179	11
MODEL NO.	CARRIER TAPE WIDTH	E	D	14	10.4	17.3	-1079	10
				13	9.4	16.3	-0979	9
				12	8.4	15.3	-0879	8
				11	7.4	14.3	-0779	7
				10	6.4	13.3	-0679	6
				9	5.4	12.3	-0579	5
				8	4.4	11.3	52271-0479	4

REVISED		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE		DESIGN UNITS		THIRD ANGLE PROJECTION	
EC NO. J2009-2061		10 UNDER		MM ONLY		---		METRIC		◎ □	
DRWN:TKN 2009/05/20		10 OVER 30 UNDER		DRAWN BY		DATE		TITLE		EMBOSSED TAPE PACKAGE	
CHKD:HATSUMOTO 2009/05/21		30 OVER		CHECKED BY		DATE		H. KAWABATA 2004/03/12		FOR 52271-**-19	
APPR:NUKITA 2009/05/21		ANGULAR		APPROVED BY		DATE		K. TOJO 2004/03/12		-LEAD FREE-	
REV		DRAFT WHERE APPLICABLE		M. SASAO 2004/03/12		DATE		MATERIAL NO.		MOLEX INCORPORATED	
A		MUST REMAIN WITHIN DIMENSIONS		SIZE		DOCUMENT NO.		SD-52271-037		SHEET NO.	
				A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				1 OF 3	

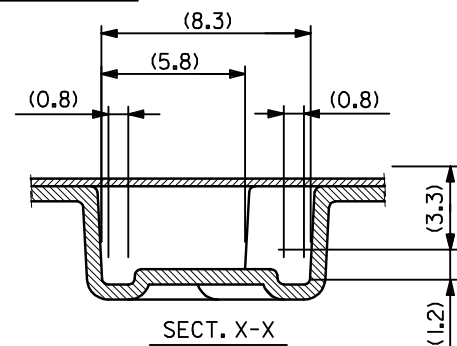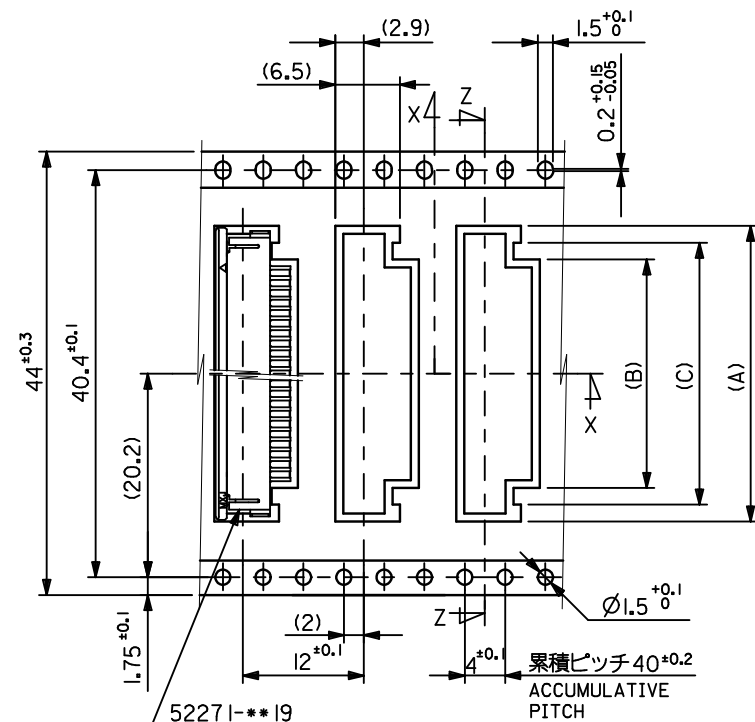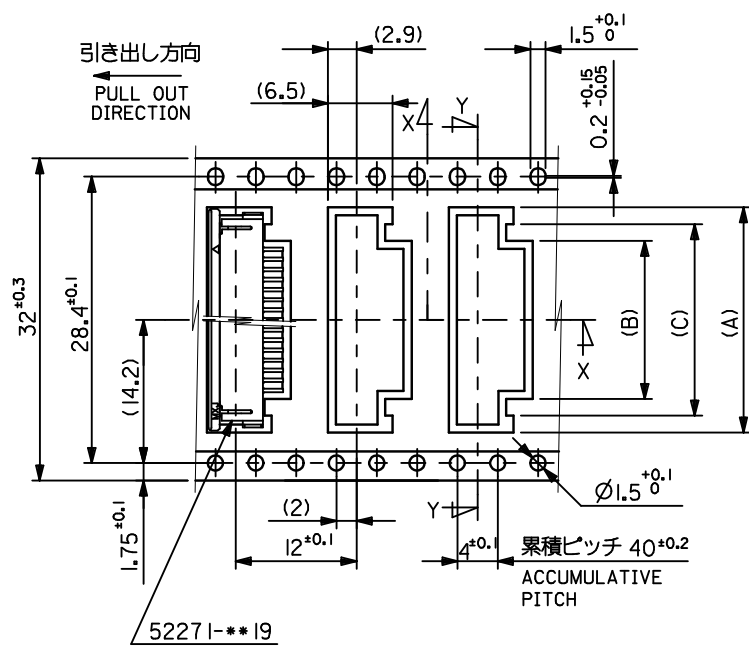

REVISED EC NO: J2009-2061 DRWN:TKON CHKD:HATSUMOTO APPR:NUKITA	2009/05/20 2009/05/21 2009/05/21	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
			10 UNDER 10 OVER 30 UNDER 30 OVER ANGULAR		DRAWN BY DATE H.KAWABATA 2004/03/12		TITLE EMBOSSD TAPE PACKAGE FOR 52271-***19 -LEAD FREE-					
					CHECKED BY DATE K. TOJO 2004/03/12							
					APPROVED BY DATE M. SASAO 2004/03/12		MOLEX MOLEX INCORPORATED					
					MATERIAL NO.						DOCUMENT NO.	
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-52271-037				2 OF 3	
			REV		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

10 9 8 7 6 5 4 3 2 1

F



E

D

C

B

A

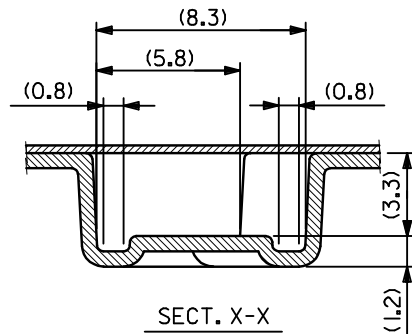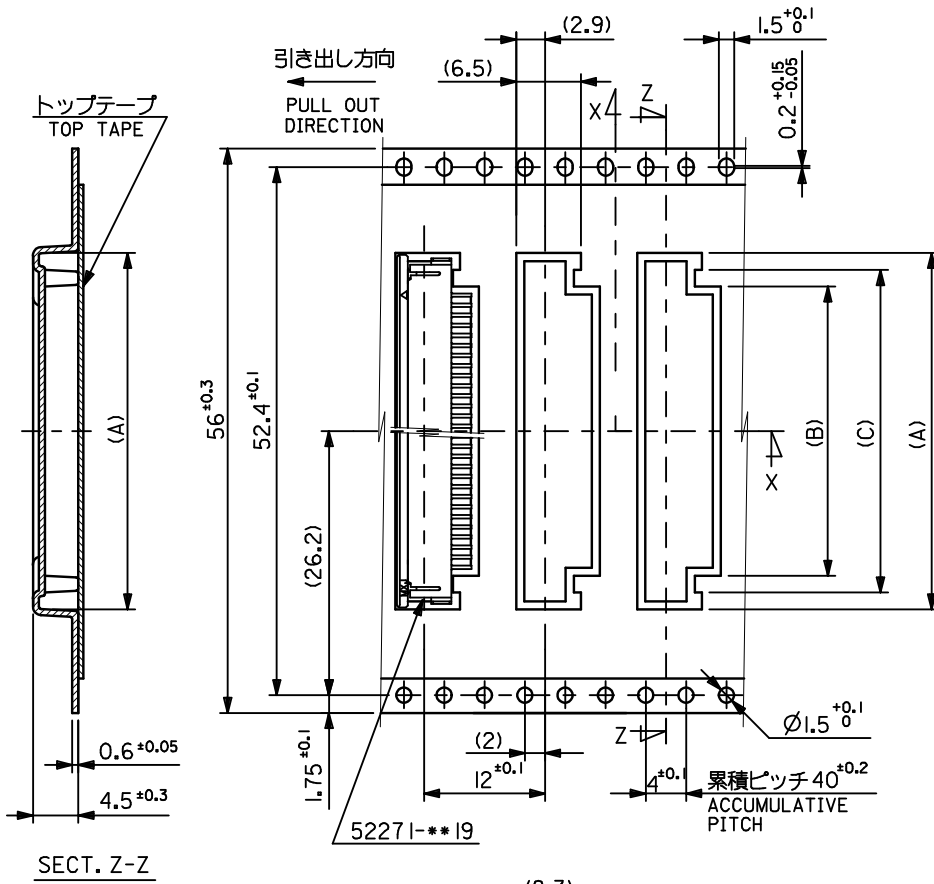

56	61.4	57.4	34	30.4	37.35	5227I-3079	30
			33	29.4	36.35	5227I-2979	29
			32	28.4	35.35	5227I-2879	28
キャリアテープ幅 CARRIER TAPE WIDTH	E	D	(C)	(B)	(A)	MATERIAL NO.	標 記 CKT.

Rev. E 2006/04/15

9

8

7

6

5

4

3

2

EN-02JA(021)

REVISED
EC NO.: J2009-2061
2009/05/20
DRWN:TKN
2009/05/21
CHKD:HMATSUMOTO
2009/05/21
APPR:NUKITA
2009/05/21

GENERAL TOLERANCES (UNLESS SPECIFIED)	
10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGULAR ±3°	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE MM ONLY	
DRAWN BY	DATE
H.KAWABATA	2004/03/12
CHECKED BY	DATE
K.TOJO	2004/03/12
APPROVED BY	DATE
M.SASAO	2004/03/12
MATERIAL NO.	
SEE TABLE	
SIZE	A3

SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
MODEL NO. 5227I-***79		
EMBOSSED TAPE PAKEGE FOR 5227I-***19 -LEAD FREE-		
MOLEX INCORPORATED		
DOCUMENT NO. SD-5227I-037		SHEET NO. 3 OF 3
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

F

E

D

C

B

A