

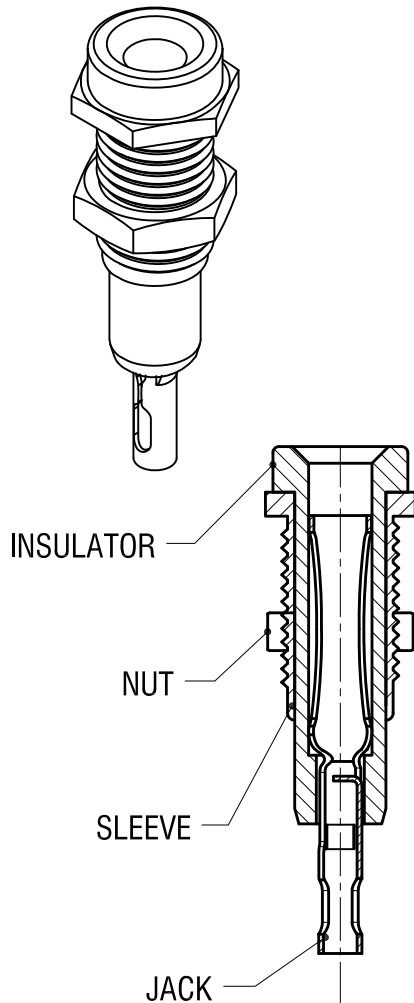


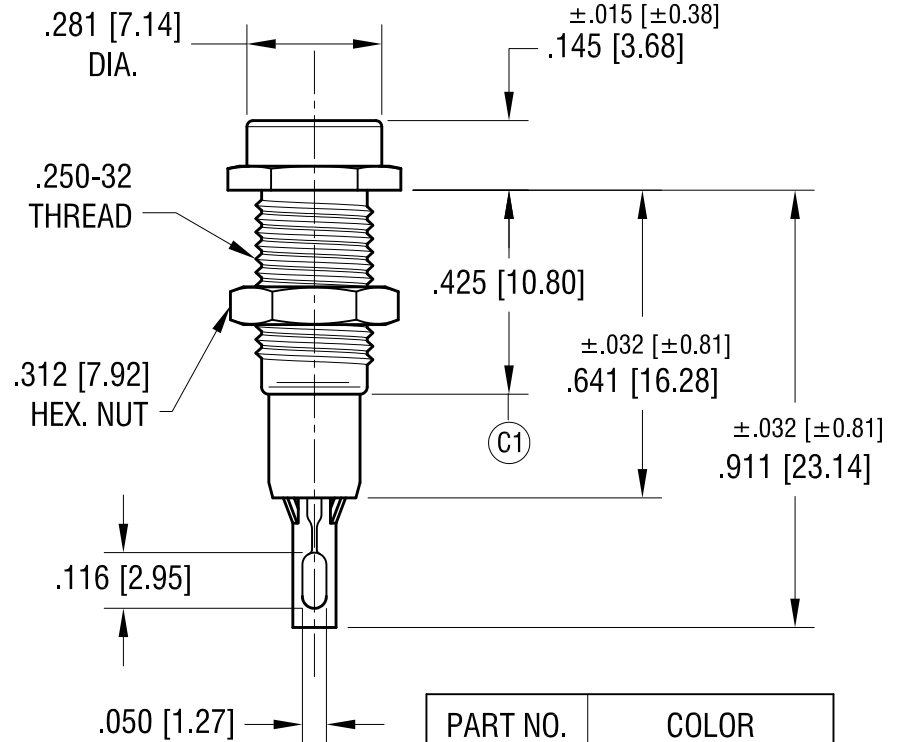

SPRING CONTACT TO  
ACCEPT .080 [2.03]  
DIA. PIN



**RATINGS:**

CURRENT: 10 AMPS  
BREAKDOWN VOLTAGE: 5700 V RMS  
CONTACT RESISTANCE: 0.010 OHMS MAX.  
CONTACT-TO-PANEL C: 2 pF NOMINAL

**NOTES:**

**1. CONTACT:**

MAT'L - PHOSPHOR BRONZE  
SILVER PLATE

**BODY:**

MAT'L - NYLON 6/6 PER ASTM D4066

**2. SHELL, NUT: BRASS, NICKEL PLATE.  
HARDWARE SUPPLIED  
UNASSEMBLED.**

| PART NO. | COLOR  |
|----------|--------|
| 6024     | WHITE  |
| 6025     | RED    |
| 6026     | BLACK  |
| 6027     | GREEN  |
| 6028     | YELLOW |
| 6029     | BLUE   |

|         |                           |      |
|---------|---------------------------|------|
| 3.01.16 | ECN 16-034, (C1) WAS .395 | C    |
| 9.26.11 | CHANGE AS PER ECN 11-127  | B    |
| 2.5.03  | CHANGE AS PER ECN 03-012  | A    |
| DATE    | DESCRIPTION               | REV. |

| KEYSTONE ELECTRONICS CORP.                                      |                        |                  |                      |
|-----------------------------------------------------------------|------------------------|------------------|----------------------|
| www.keyelco.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900 |                        |                  |                      |
| PART NAME<br>INSULATED METAL-CLAD TIP JACK                      |                        |                  |                      |
| MATERIAL<br>AS NOTED                                            |                        |                  |                      |
| FINISH<br>AS NOTED                                              |                        | DRN BY<br>BOONE  | DATE<br>12.7.82      |
|                                                                 |                        | APP'D<br>LN      | SCALE<br>2.5X        |
| TOLERANCES<br>DECIMAL<br>ANGULAR                                | INCH<br>± .005<br>± 1° | [MM]<br>[± 0.13] | CODE<br>C            |
| UNLESS OTHERWISE SPECIFIED                                      |                        |                  | DWG NO.<br>6024-6029 |