

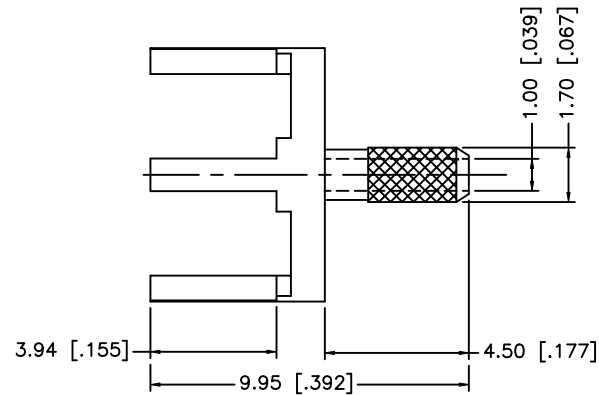
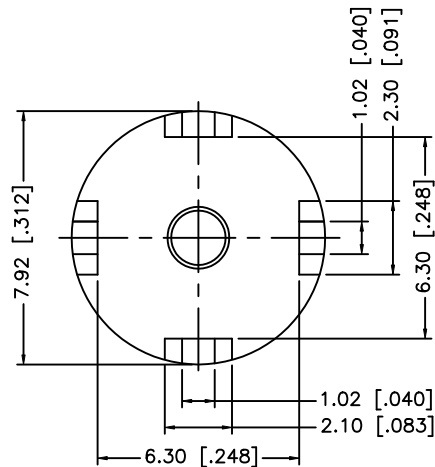
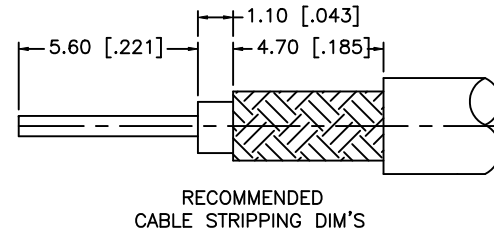


REV.	DATE	DESCRIPTION
NC	02/23/00	INITIAL RELEASE
A	03/24/08	UPDATE DRAWING FORMAT

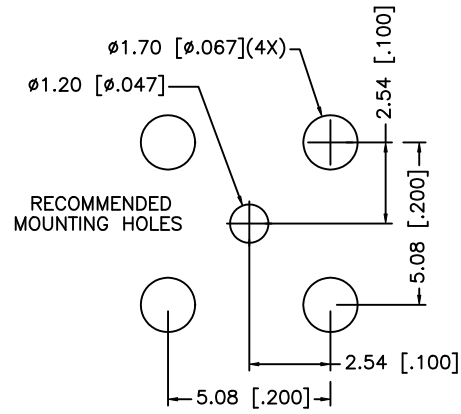

NOTES:
1. CRIMPED FERRULE HEX CRIMP SIZE .128"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex									
8						DRAWN	G.R.S.								03/24/08		
7						CHECKED										PART DESCRIPTION PCB MOUNT CABLE TERMINATION (FOR RG–178B/U, 196A/U CABLE)	
6						ISSUED											
5						SHEET	1 OF 1		PART NO. 142266								
4																	
3						CAD FILE C:/142/142266.DWG							DWG. NO.	142266.DWG	REV.	A	SIZE
2	FERRULE	COPPER	GOLD	1													
1	BODY	BRASS	GOLD	1													
	DESCRIPTION	MATERIAL	FINISH	QTY													