


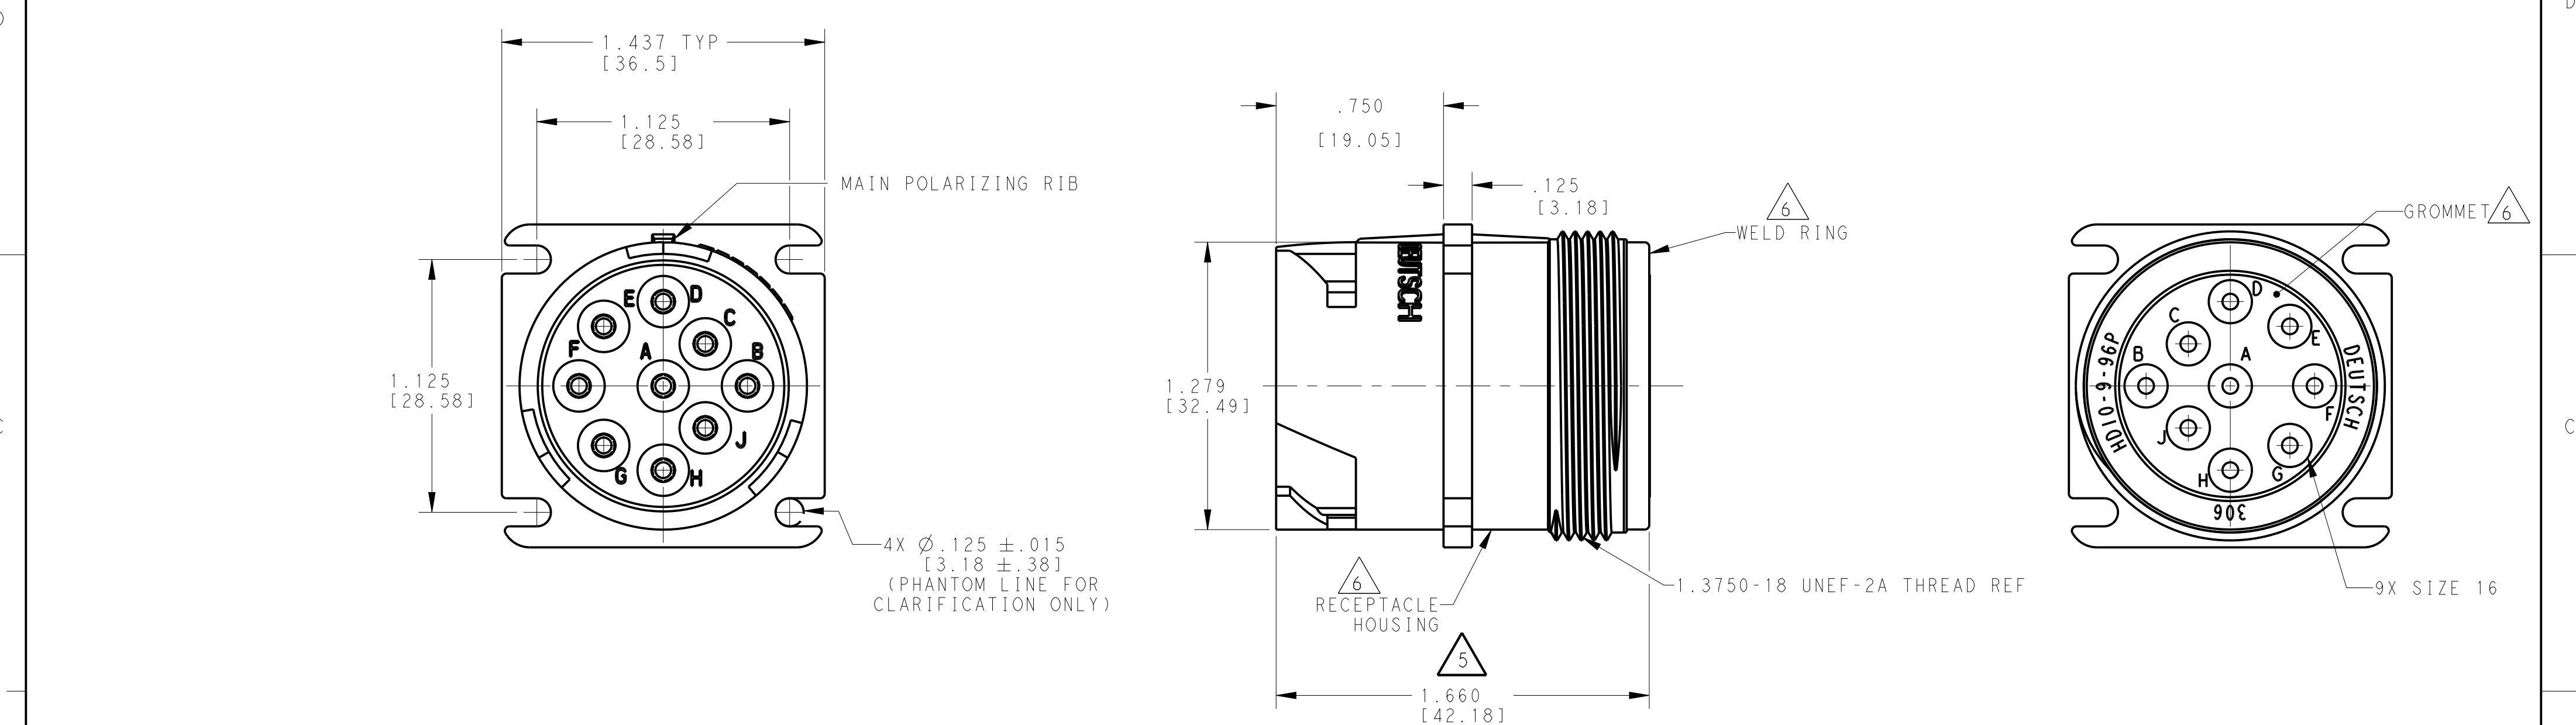

- 6

MATERIAL: RECEPTACLE HOUSING AND WELD RING: PA 15%GF (GREY)
GROMMET: SILICONE (RED)
- 5


OVERALL DIMENSION DOES NOT INCLUDE RUBBER GROMMET.
- 4

THIS RECEPTACLE MATES WITH FOLLOWING PLUG (X= SEAL TYPE, XXXX= ALL MODIFICATIONS).
HD16-9-96SX-XXXX
- 3

SEE DRAWING 0425-015-0000 FOR CONTACT AND WIRE
PERFORMANCE AND APPLICATION CHARACTERISTICS.
- 2

MAXIMUM PANEL THICKNESS IS .250 [6.25].
- 1

SEE TABLE FOR USABLE WIRE RANGE AND INSULATION RANGE.
- | CONTACT
SIZE | MINIMUM
O.D. | MAXIMUM
O.D. | WIRE RANGE
[mm ²] |
|-----------------|-----------------|-----------------|----------------------------------|
| 16 | .100
[2.54] | .150
[3.81] | 14-20 AWG
[2.0-.50] |
- NOTES:

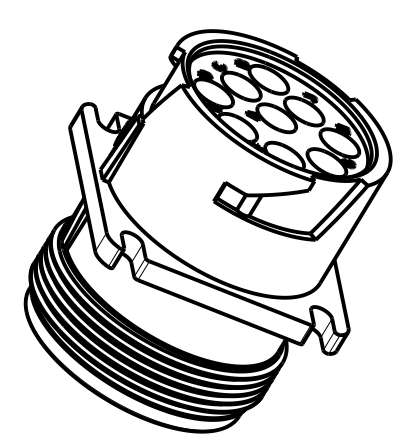

3-D VIEW

