


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PART NUMBER	A BOLT LENGTH	APPROXIMATE DIMENSIONS			
		B	C	D	E
VTA-0-Q	1-1/4 [32]	13/32 [10.3]	5/16	1-7/16 [37]	15/16 [24]
VTA-1-Q	1-1/2 [38]	1/2 [12.7]	5/16	1-9/16 [40]	1-1/8 [29]
VTA-2-Q	1-3/4 [44]	19/32 [15]	3/8	1-27/32 [47]	1-11/32 [34]
VTA-3-12	2 [51]	3/4 [19]	1/2	2-5/16 [59]	1-5/8 [41]
VTA-4-12	2-1/4 [57]	7/8 [22.2]	1/2	2-7/16 [62]	1-11/16 [43]
VTA-5-6	2-1/2 [64]	1-1/16 [26.9]	1/2	2-11/16 [68]	1-7/8 [48]
VTA-6-6	2-3/4 [70]	1-1/4 [31.7]	5/8	3-1/16 [78]	2-1/4 [57]

NOTES:

1. MATERIAL: TIN PLATED BRONZE CASTING
2. U.L. LISTED WITH COPPER CONDUCTORS

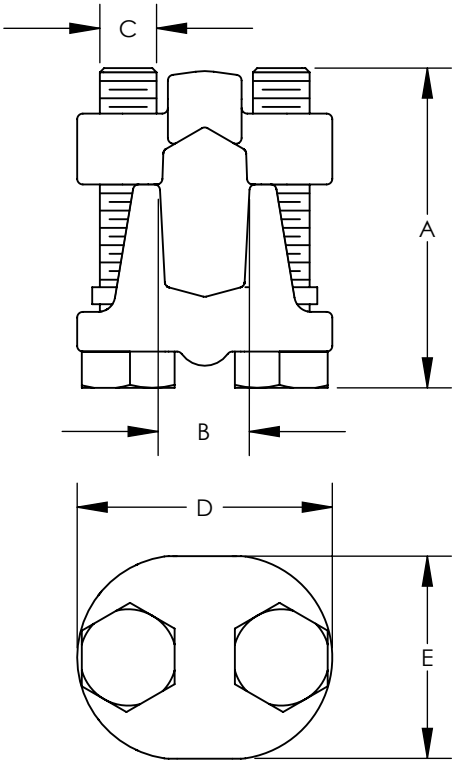

PART NUMBER	MAXIMUM CONDUCTORS					MAXIMUM WIRE DIAMETER
	COPPER		COPPER WELD SOLID	ALUMINUM		
	SOLID	STR.		AWG.	ACSR.	IN.
VTA-0-Q	2/0	1/0	2/0	1/0 STR	1	0.375
VTA-1-Q	3/0	2/0	3/0	----	----	0.419
VTA-2-Q	4/0	4/0	4/0	----	----	0.528
VTA-3-12	----	350 kcmil	----	----	----	0.682
VTA-4-12	----	500 kcmil	----	----	----	0.815
VTA-5-6	----	800 kcmil	----	----	----	1.031
VTA-6-6	----	1000 kcmil	----	----	----	1.153

							TITLE BRONZE TAPS - 2 BOLT CONNECTOR VTA SERIES CUSTOMER DRAWING			
							ITEM REVISION NAME N41209BBAA/02			
							DATASET FILE NAME N41209BB-C41209/02.SLDDRW			
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .X ± .XX ± 1/8" [3.2] .XXX ± ANGLES ±  THIRD ANGLE PROJECTION			
02	7/15	JHNU	JHNU	RGB	REVISED PART NUMBER: VTA-1-Q WAS VRA-1-Q	N41209BB-C41209	MATERIAL SEE NOTES			
01	5/15	JHNU	JHNU	RGB	REMOVED MADE IN U.S.A. NOTE REVISED TITLE BLOCK CONVERTED DRAWING TO SOLIDWORKS	N41209BB-C41209	DRAWING NUMBER C41209			
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY TSMA	DATE 2/97	CHK	SCALE NONE
							SHEET 1 OF 1		SIZE A	