




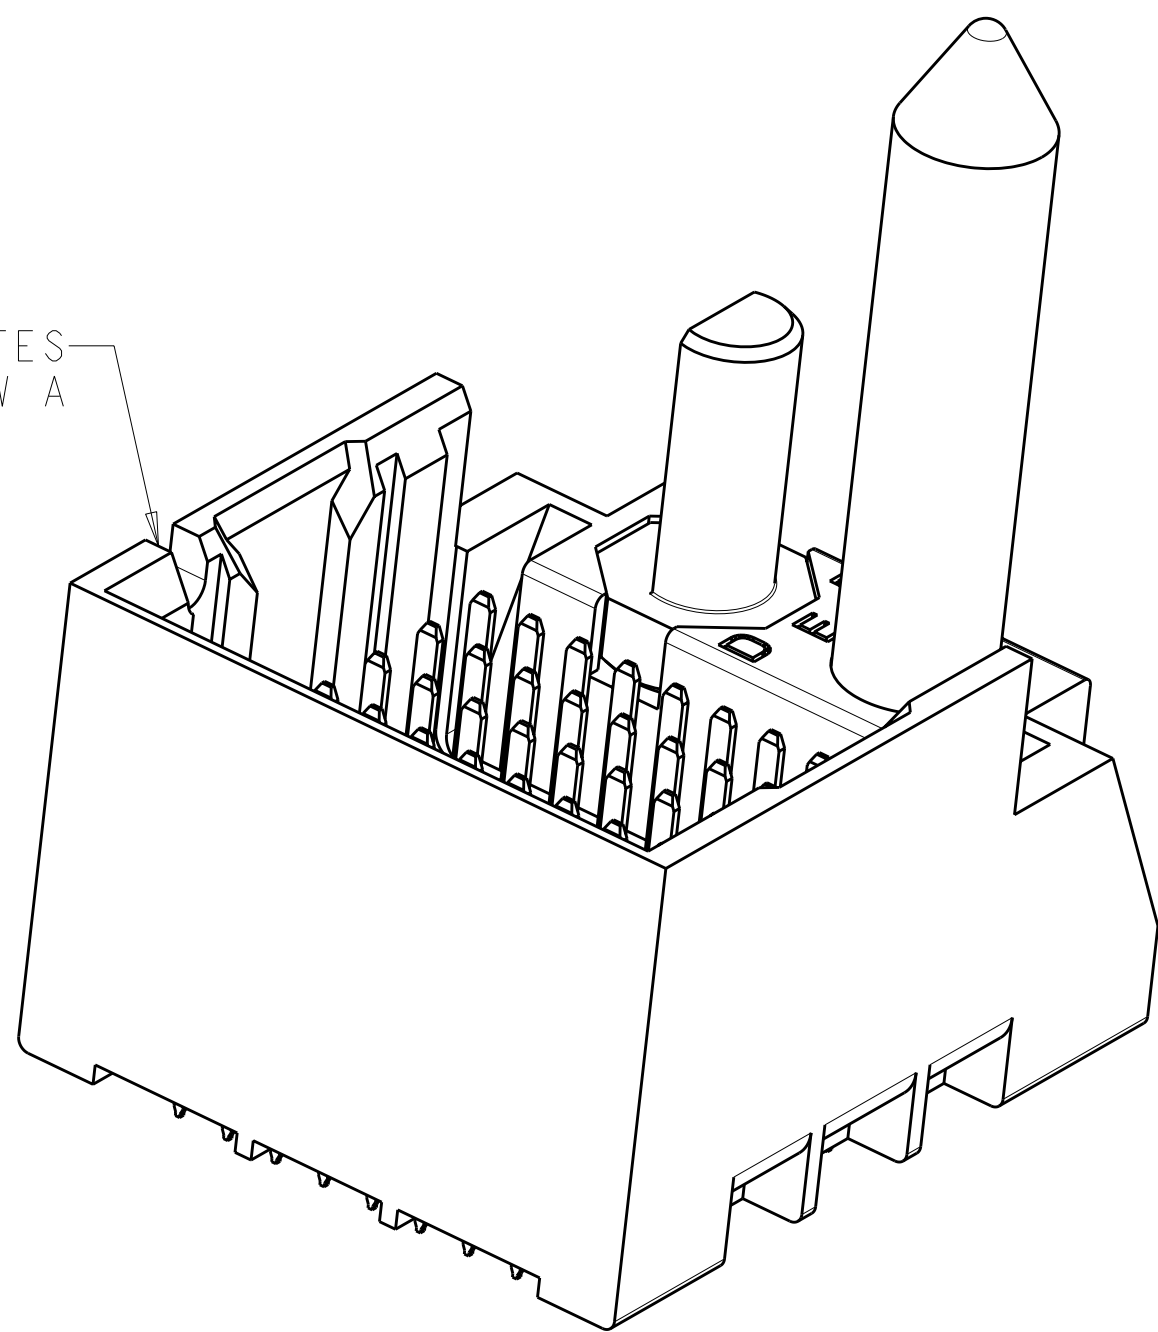

- ① MATERIAL:
HOUSING: LCP, GLASS FILLED, UL94V-0.
TERMINALS: HIGH PERFORMANCE COPPER ALLOY.
- ② FINISH:
30μ" MIN GOLD IN CONTACT AREA. SELECTIVE TIN
ON PCB TAILS, NICKEL OVERALL.
- ③ FINISH:
30μ" MIN GOLD IN CONTACT AREA. SELECTIVE TIN-LEAD
ON PCB TAILS, NICKEL OVERALL.
4. SCREWS PACKAGED IN END OF PACKAGING TUBE.
- ⑤ FOR GROUNDED GUIDE PIN USE Ø3.56±0.08 PTH,
Ø3.66 DRILL, AND Ø6.5 PAD.
6. KEYING PIN SHOWN IN POSITION A, SEE KEYING CHART
ON SHEET 2 FOR OTHER POSITIONS.

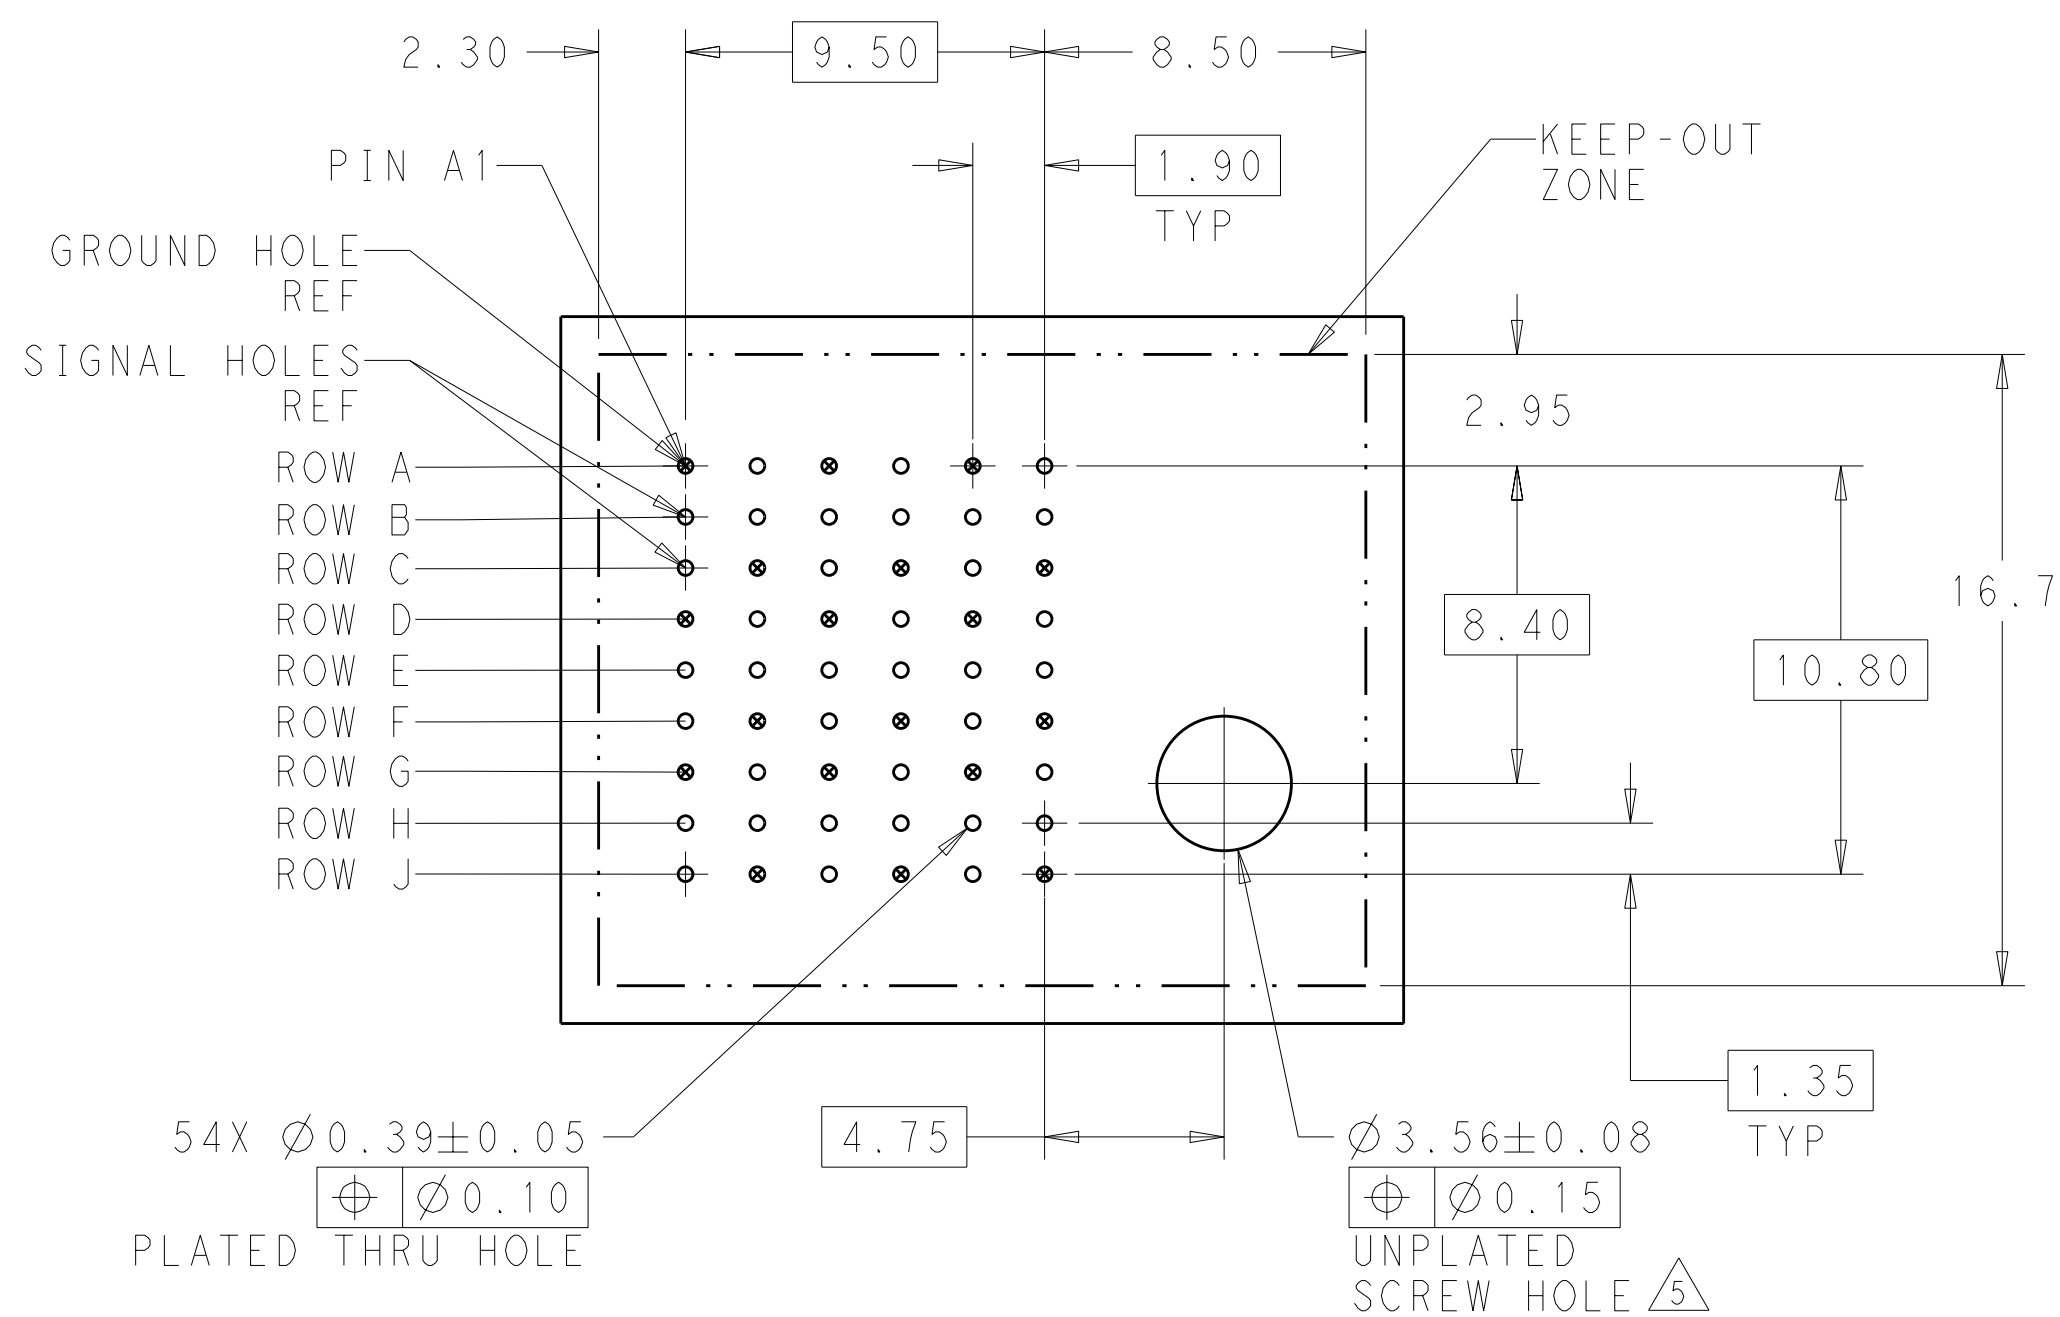

RIGHT GUIDED
BACKPLANE HOLE PATTERN
(CONNECTOR SIDE)

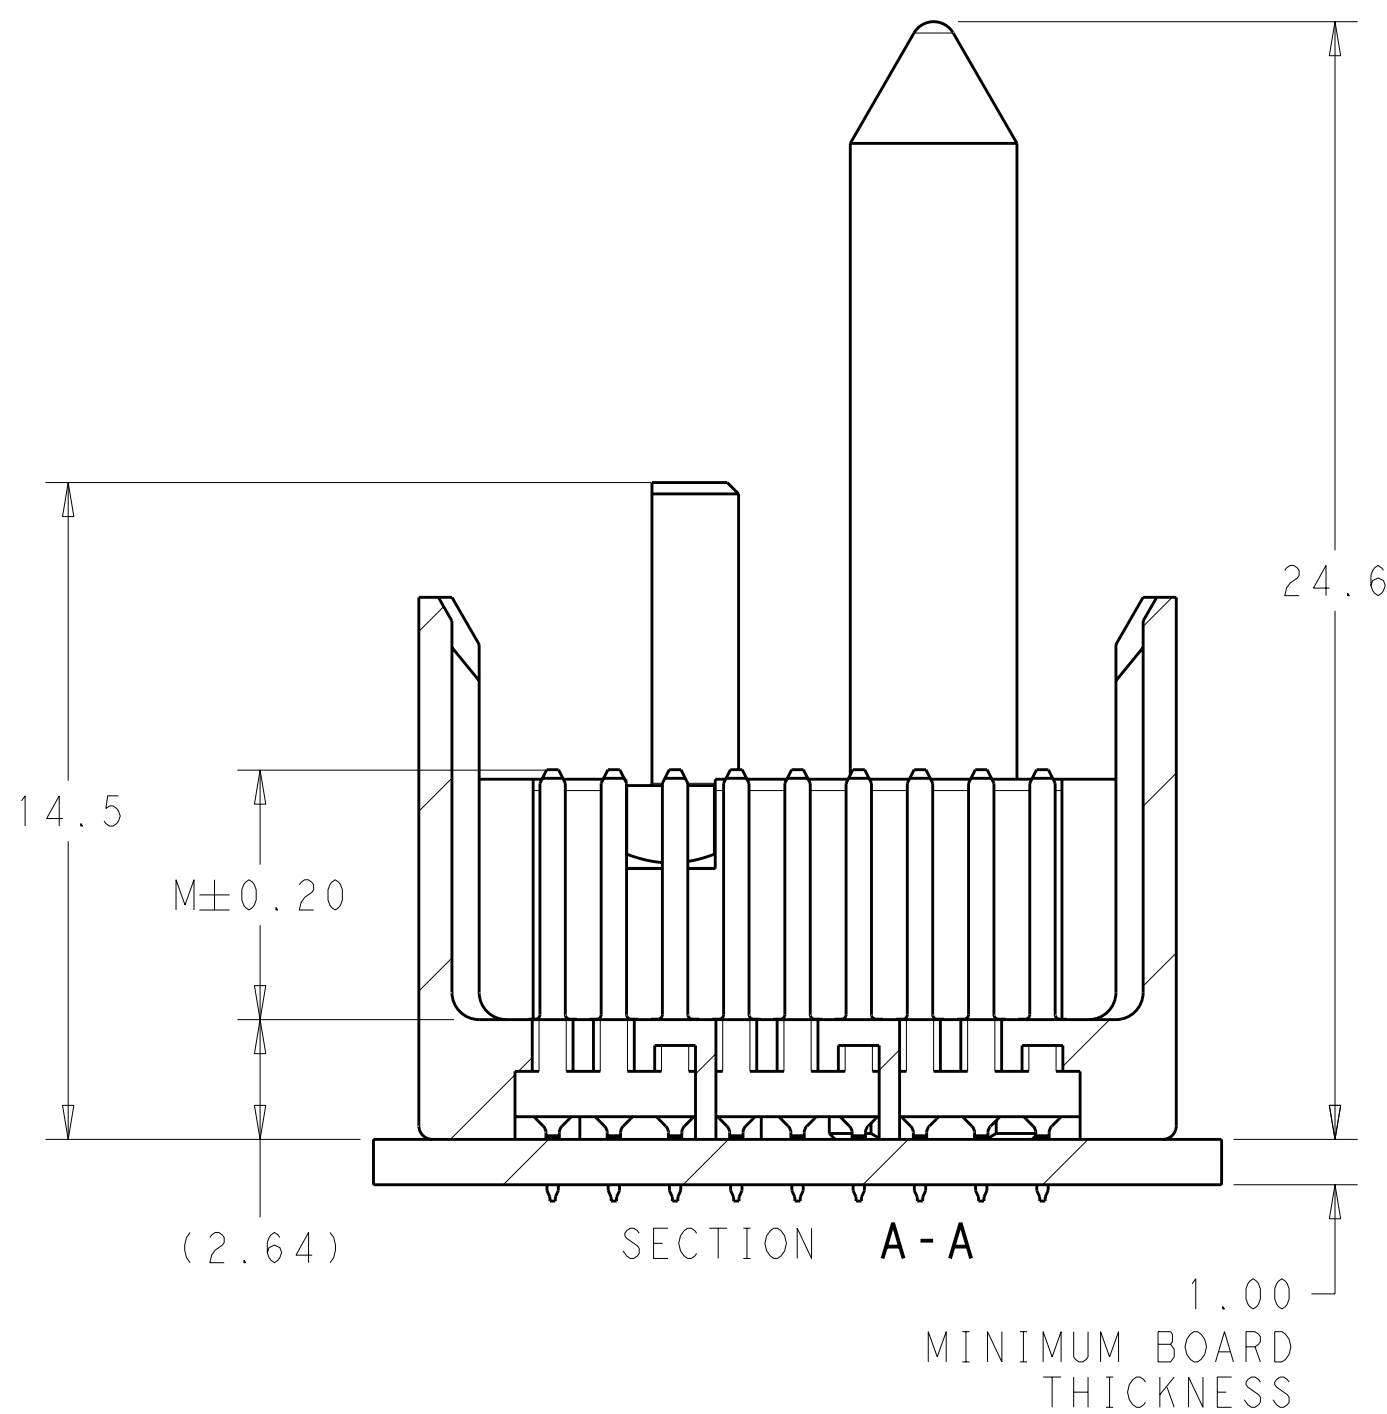

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN <u>K. SHOBER</u> 05JAN2011 CNG <u>J. EABY</u> 05JAN2011 APP'D <u>FABY</u> 05JAN2011		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0 PLC $\pm$.05 2 PLC $\pm$.05 2 PLC $\pm$.10 2 PLC $\pm$.15 2 PLC $\pm$.20 ANGLES $\pm$.5°		NAME: IMPACT, 3 PAIR, 6 COLUMN, HEADER RIGHT GUIDED, LEFT END WALL SIGNAL MODULE, 0.39 PTH	
MATERIAL 		FINISH SEE TABLE		SIZE CASE CODE DRAWING NO. A100779C-2132533	
		WEIGHT -		RESTRICTED TO -	
		CUSTOMER DRAWING		SCALE 6:1 SHEET 1 OF 2 REV A	

LOC		DIST		REVISIONS					
AD		00		P	LTR	DESCRIPTION	DATE	OWN	APVD
				-	-	SEE SHEET 1	-	-	-

	H	5.5	8-2132533-6
	H	4.9	8-2132533-5
	H	4.5	8-2132533-4
	H	5.5	8-2132533-3
	H	4.9	8-2132533-2
	H	4.5	8-2132533-1
	G	5.5	7-2132533-6
	G	4.9	7-2132533-5
	G	4.5	7-2132533-4
	G	5.5	7-2132533-3
	G	4.9	7-2132533-2
	G	4.5	7-2132533-1
	F	5.5	6-2132533-6
	F	4.9	6-2132533-5
	F	4.5	6-2132533-4
	F	5.5	6-2132533-3
	F	4.9	6-2132533-2
	F	4.5	6-2132533-1
	E	5.5	5-2132533-6
	E	4.9	5-2132533-5
	E	4.5	5-2132533-4
	E	5.5	5-2132533-3
	E	4.9	5-2132533-2
	E	4.5	5-2132533-1
	D	5.5	4-2132533-6
	D	4.9	4-2132533-5
	D	4.5	4-2132533-4
	D	5.5	4-2132533-3
	D	4.9	4-2132533-2
	D	4.5	4-2132533-1
	C	5.5	3-2132533-6
	C	4.9	3-2132533-5
	C	4.5	3-2132533-4
	C	5.5	3-2132533-3
	C	4.9	3-2132533-2
	C	4.5	3-2132533-1
	B	5.5	2-2132533-6
	B	4.9	2-2132533-5
	B	4.5	2-2132533-4
	B	5.5	2-2132533-3
	B	4.9	2-2132533-2
	B	4.5	2-2132533-1
	A	5.5	1-2132533-6
	A	4.9	1-2132533-5
	A	4.5	1-2132533-4
	A	5.5	1-2132533-3
	A	4.9	1-2132533-2
	A	4.5	1-2132533-1
	-	5.5	2132533-6
	-	4.9	2132533-5
	-	4.5	2132533-4
	-	5.5	2132533-3
	-	4.9	2132533-2
	-	4.5	2132533-1
FINISH	KEY POSITION	DIM M	PART NUMBER

REFER TO WWW.TE.COM
FOR PRODUCT AVAILABILITY

KEY POSITION
CHART

NONE

A

E

B

F

C

G

D

H

THIS DRAWING IS A CONTROLLED DOCUMENT.			OWN	J. K. SHOBER	05JAN2011	TE Connectivity		
			CHK	J. EABY	05JAN2011			
DIMENSIONS:			TOLERANCES UNLESS OTHERWISE SPECIFIED:			NAME	IMPACT, 3 PAIR, 6 COLUMN, HEADER RIGHT GUIDED, LEFT END WALL SIGNAL MODULE, 0.39 PTH	
mm						PRODUCT SPEC		
			9 PLC ±.05			APPLICATION SPEC	SIZE	
			3 PLC ±0.13				CAGE CODE	
			5 PLC ±.				DRAWING NO	
			4 PLC ±.				RESTRICTED TO	
MATERIAL			ANGLES			WEIGHT	A100779	
-			FINISH			CUSTOMER DRAWING	C=2132533	
-			SEE TABLE				SCALE	
							5:1	
							SHEET	
							2	
							OF	
							2	
							REV	
							A	