
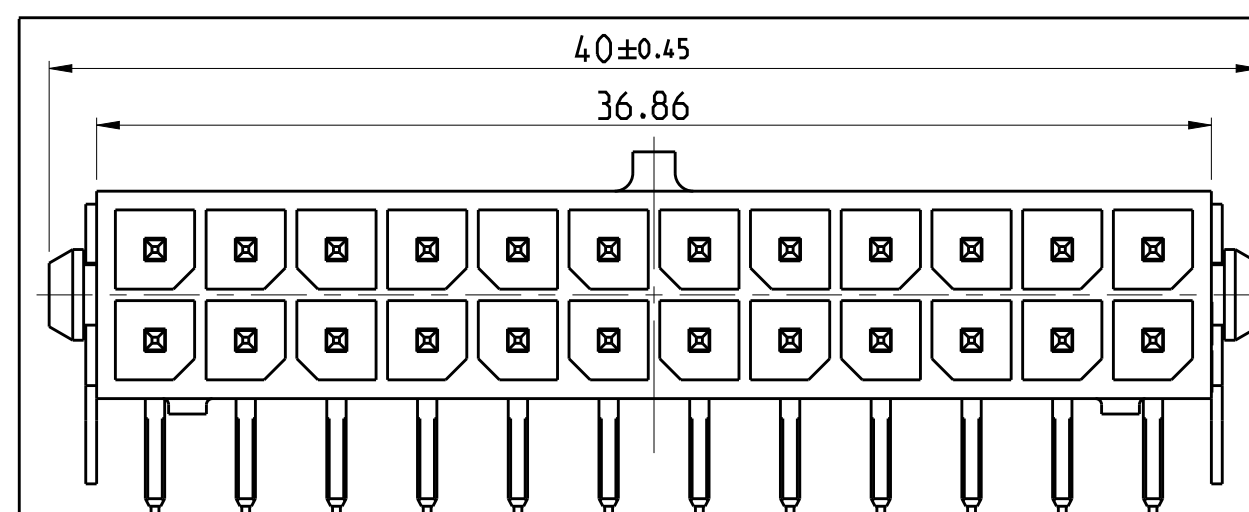
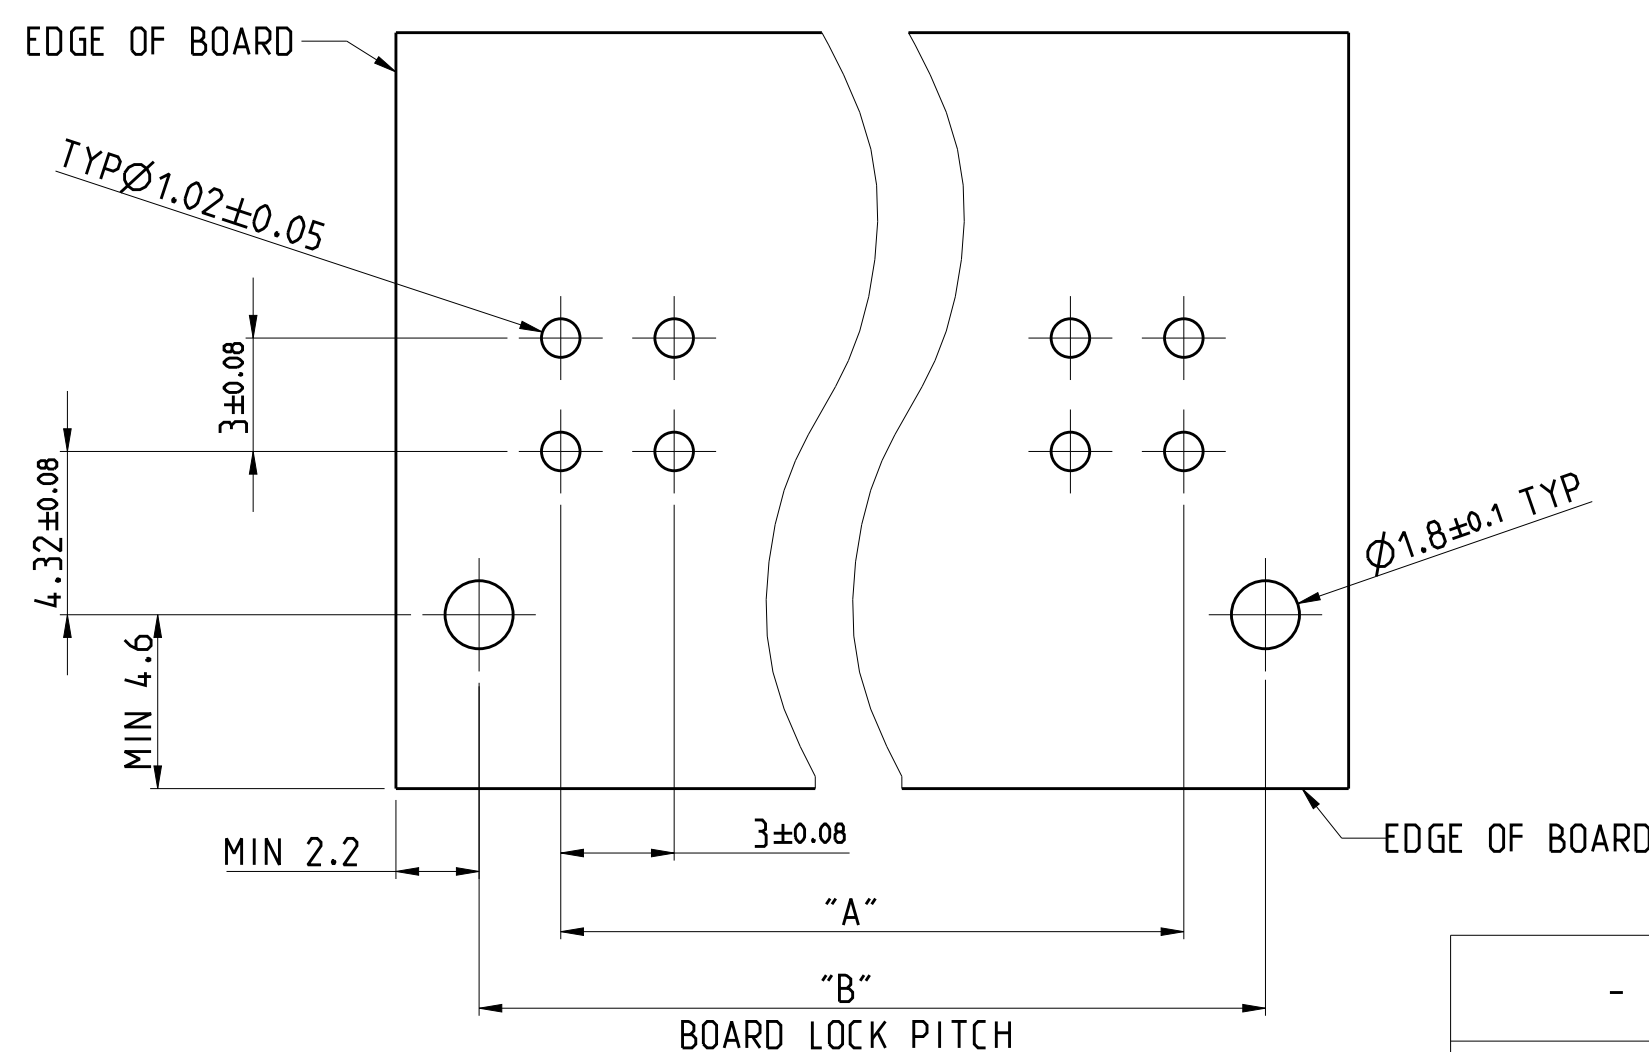
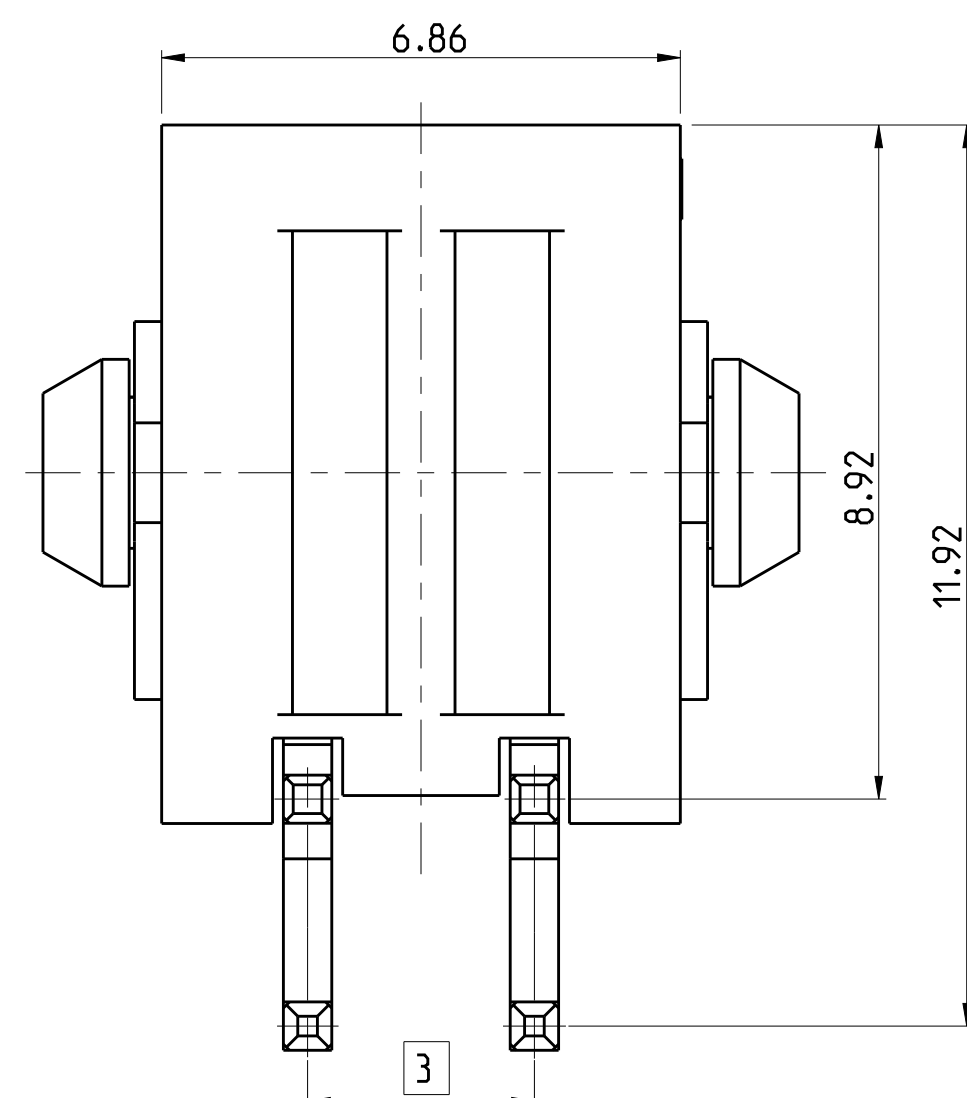
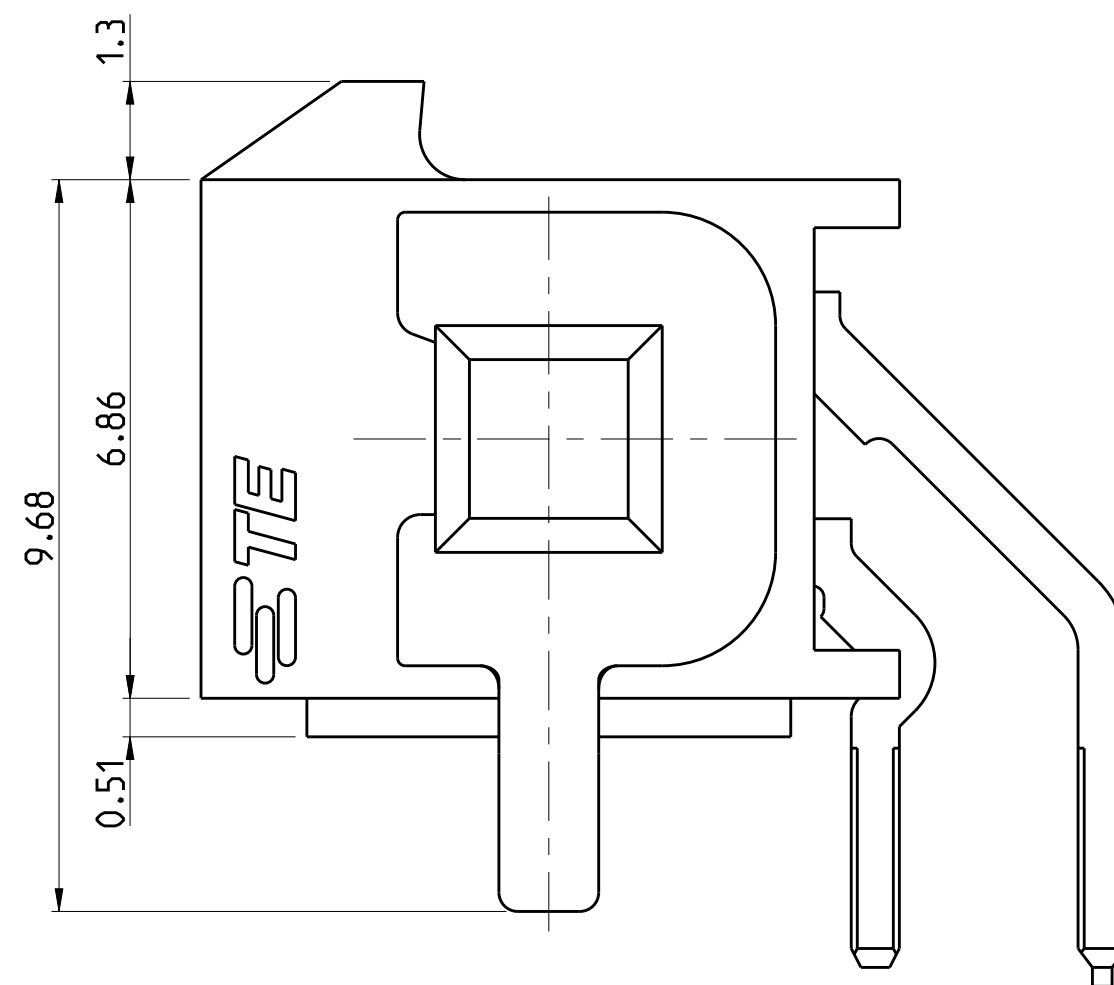
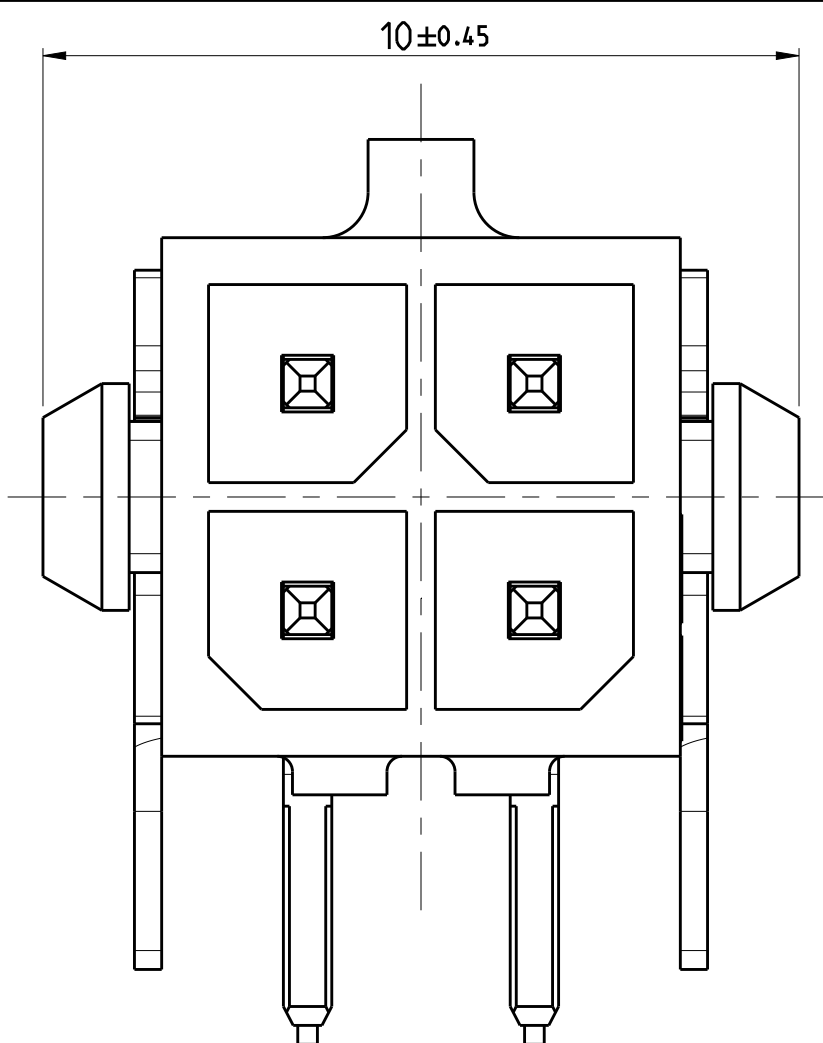
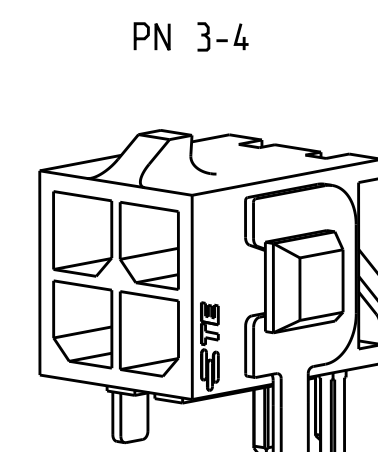
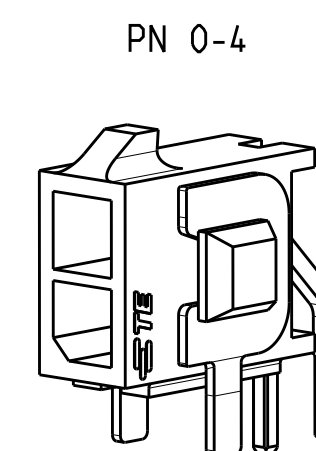


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APP
	B	REVISED PER ECO-15-005484	28 JULY 2015	SC	DZ

RECOMMENDED PCB LAYOUT (COMPONENT SIDE) 

SCALE 4:1
5-1740655-4 AS SHOWN
(24 POSITION)

- 1 MATERIAL:
CONTACTS-BRASS.
HOUSING- UL 94V-0 RATED HIGH TEMP NYLON, COLOR; BLACK
 - 2 PLATING:
CONTACTS-2.54 μm MINIMUM MATTE TIN OVER 1.27 μm MINIMUM
NICKEL ALL OVER
 - 3 RECOMMENDED PCBOARD THICKNESS TO EN 60249-2-4
TABLE 3 (1.6 $\pm$ 0.14)
4. ADAPTED TO : MATING CONN PN 794617
5. DELIVERED STATE : TAPE AND REEL

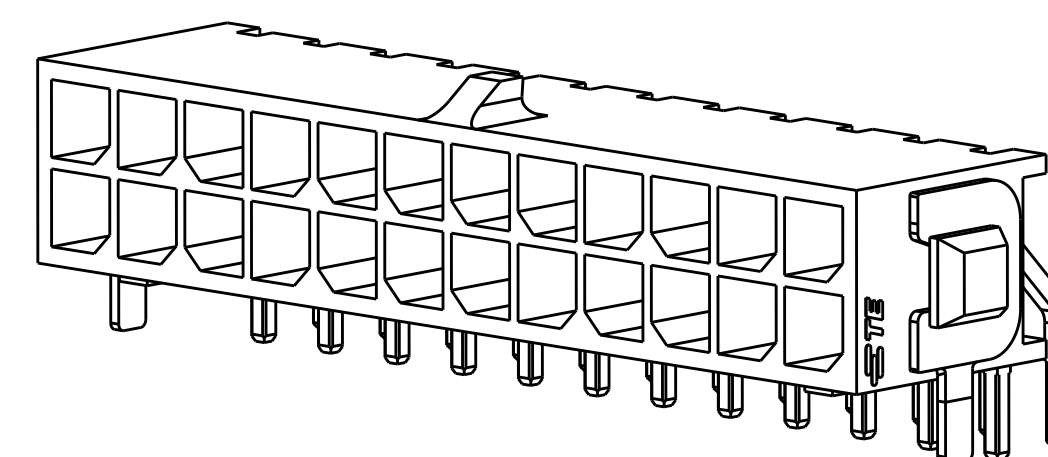

-	4.3		2	0-1740655-4	A
33.0	37.3		24	5-1740655-4	A
3.0	7.3		4	3-1740655-4	A
DIM"A"±0.08	DIM"B"±0.08	PLATING	NO OF POS	PART NUMBER	REV

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN PRAVEEN	26-Apr-06	 TE Connectivity	
		CHR T.GERLACH	26-Apr-06		
		APVD T.GERLACH	26-Apr-06		
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ±0.2 3 PLC ± 4 PLC ± ANGLES ± FINISH		NAME THRU-HOLE, RIGHT ANGLE. TIN HEADER MECHANICAL, BOARDLOCK. DUAL ROW MICRO MATE-N-LOK	
		PRODUCT SPEC - APPLICATION SPEC - WEIGHT -		SIZE A2	CAGE CODE -
MATERIAL 				DRAWING NO C-1740655	RESTRICTED -
CUSTOMER DRAWING				SCALE 10:1	SHEET 1 OF 1
				REV B	