



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	D2	REVISED PER ECR-16-011494	21JUN2017	NK	CX

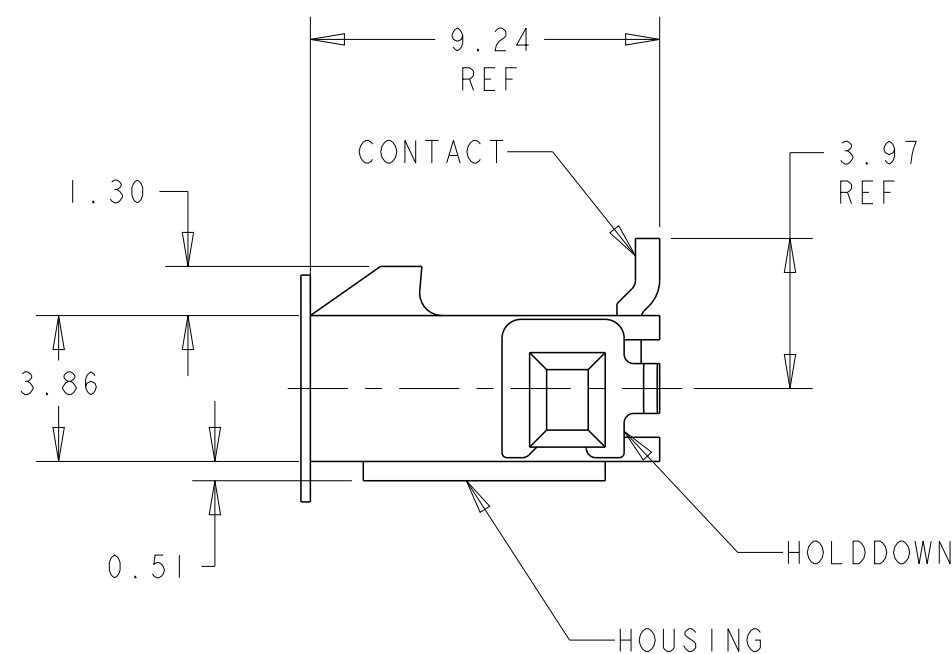

6 PLATING: CONTACTS - 0.76µm MINIMUM GOLD ON MATING END,
2.54µm MINIMUM TIN ON SOLDER TAILS, BOTH OVER
1.27µm MINIMUM NICKEL.
HOLD DOWNS: 2.54µm MINIMUM TIN OVER 1.27µm MINIMUM
NICKEL.

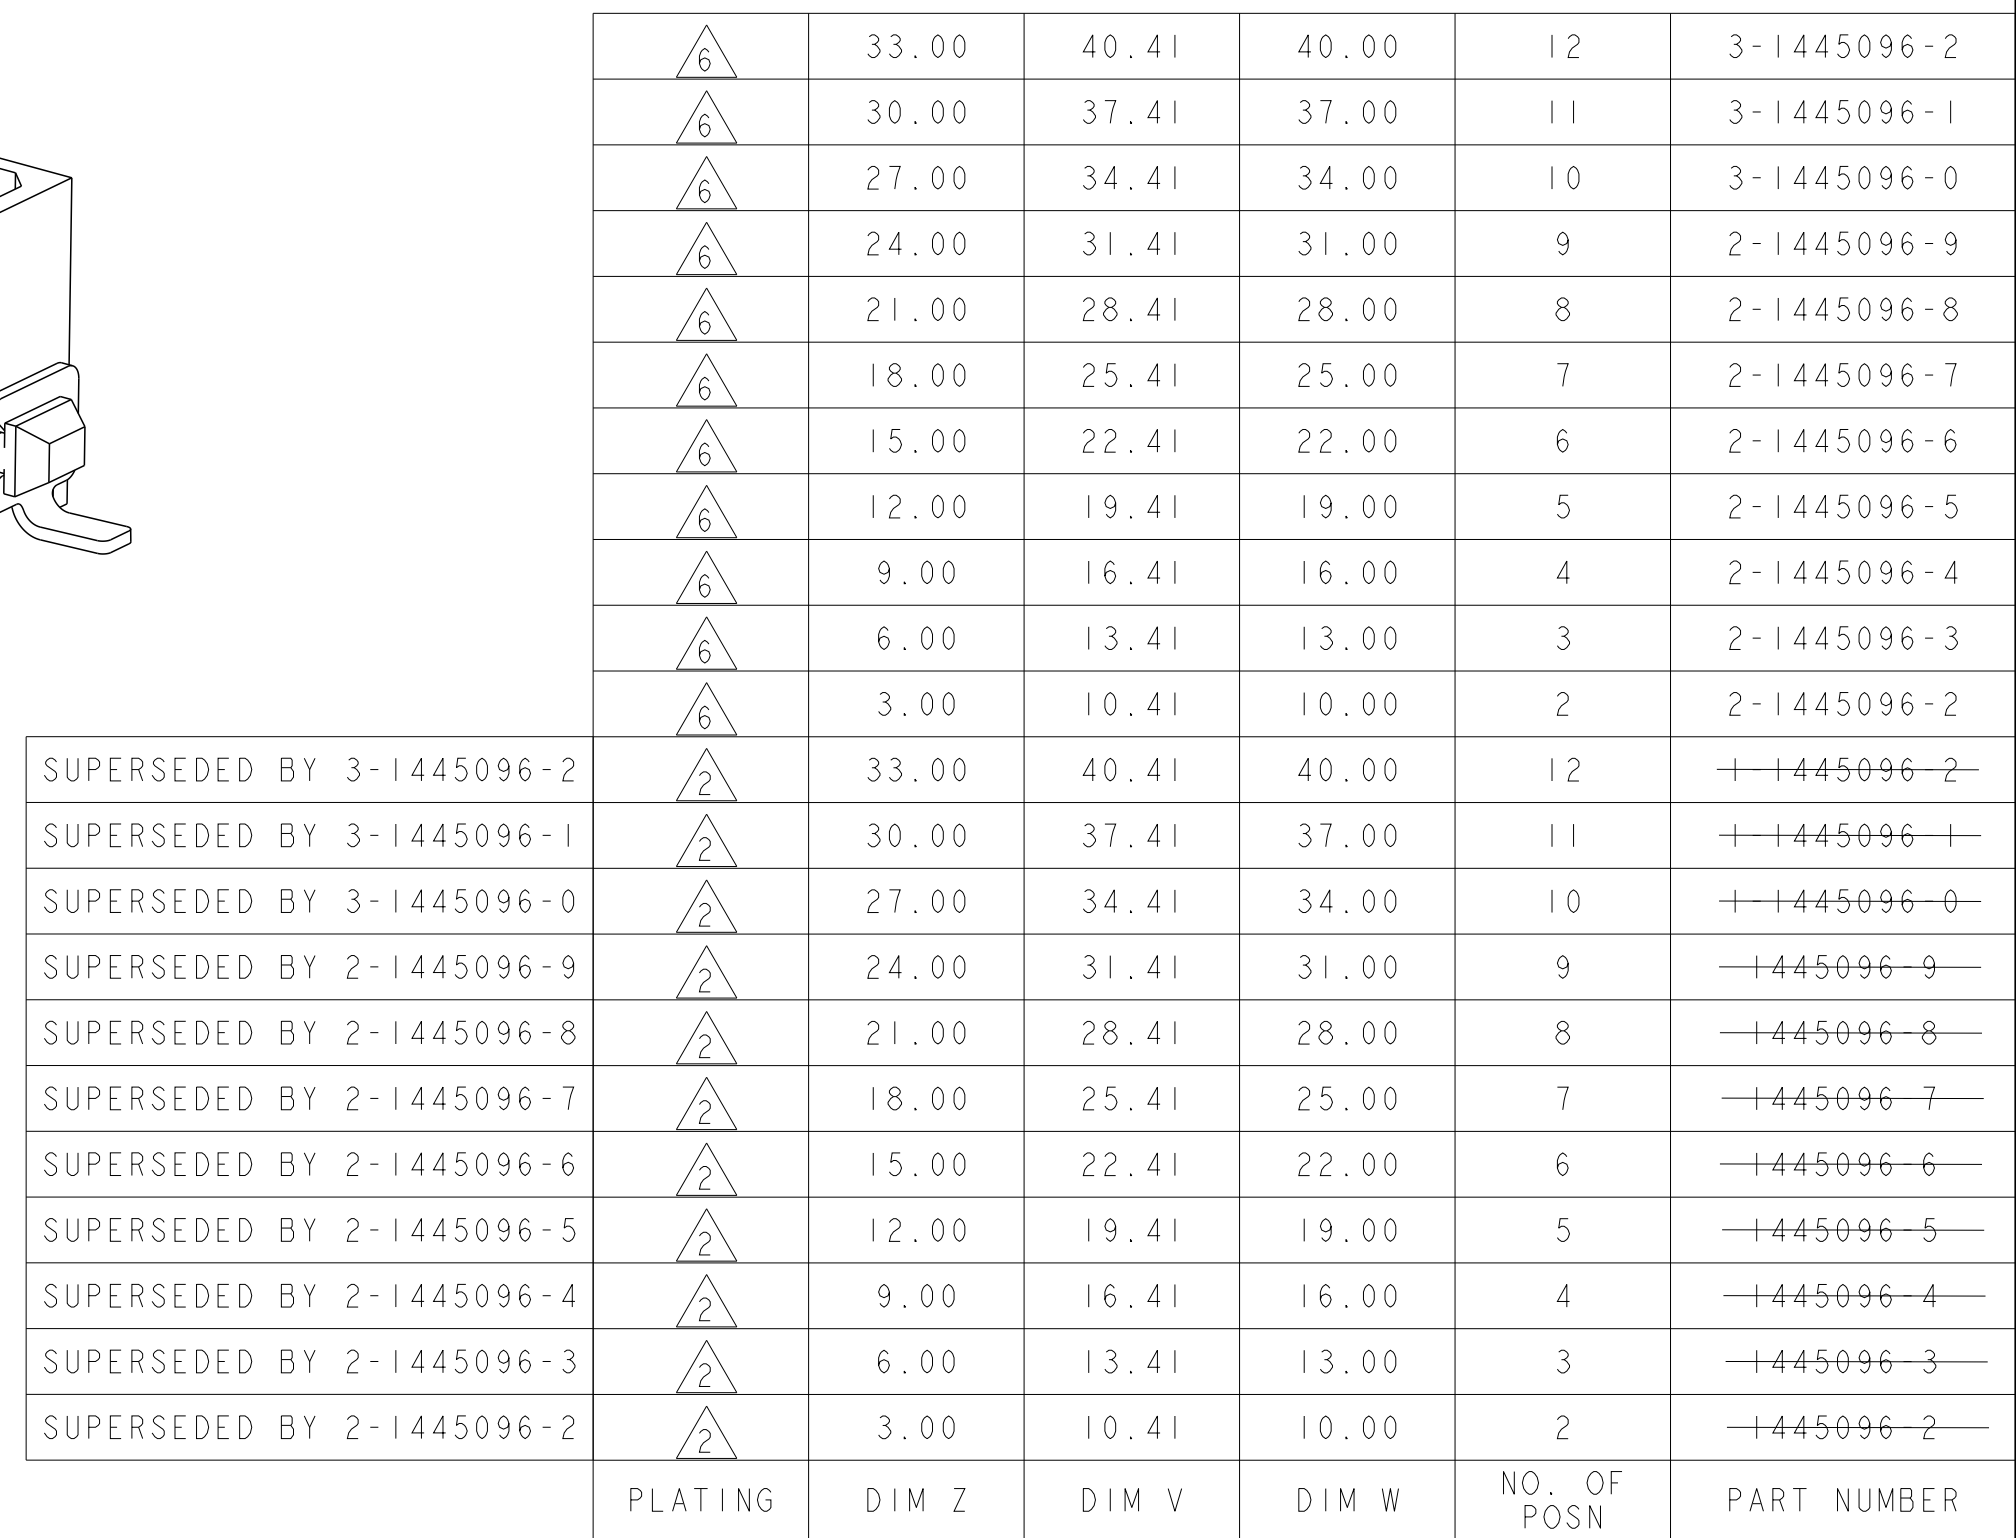

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. ROOT 09OCT2000		 TE Connectivity	
		CHK K. WHITAKER 20-FEB-2001			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME VERTICAL SURFACE MOUNT HEADER ASSY, 30 MIC GOLD CONTACTS, SURF MOUNT HOLDDOWNS, SGL ROW, MICRO MATE-N-LOK™	
		0 PLC ±. 1 PLC ±. 2 PLC ±0.13 3 PLC ±. 4 PLC ±. ANGLES ±. FINISH			
MATERIAL		WEIGHT		RESTRICTED TO	
 SEE TABLE		-		-	
CUSTOMER DRAWING				SCALE 5:1 SHEET 1 OF 1 REV D2	