



LOC		DIST		REVISIONS					
GP	00	P	LTR	DESCRIPTION			DATE	DWN	APVD
			M2	REVISED PER ECO-11-005033			23MAR11	RK	HMR

D

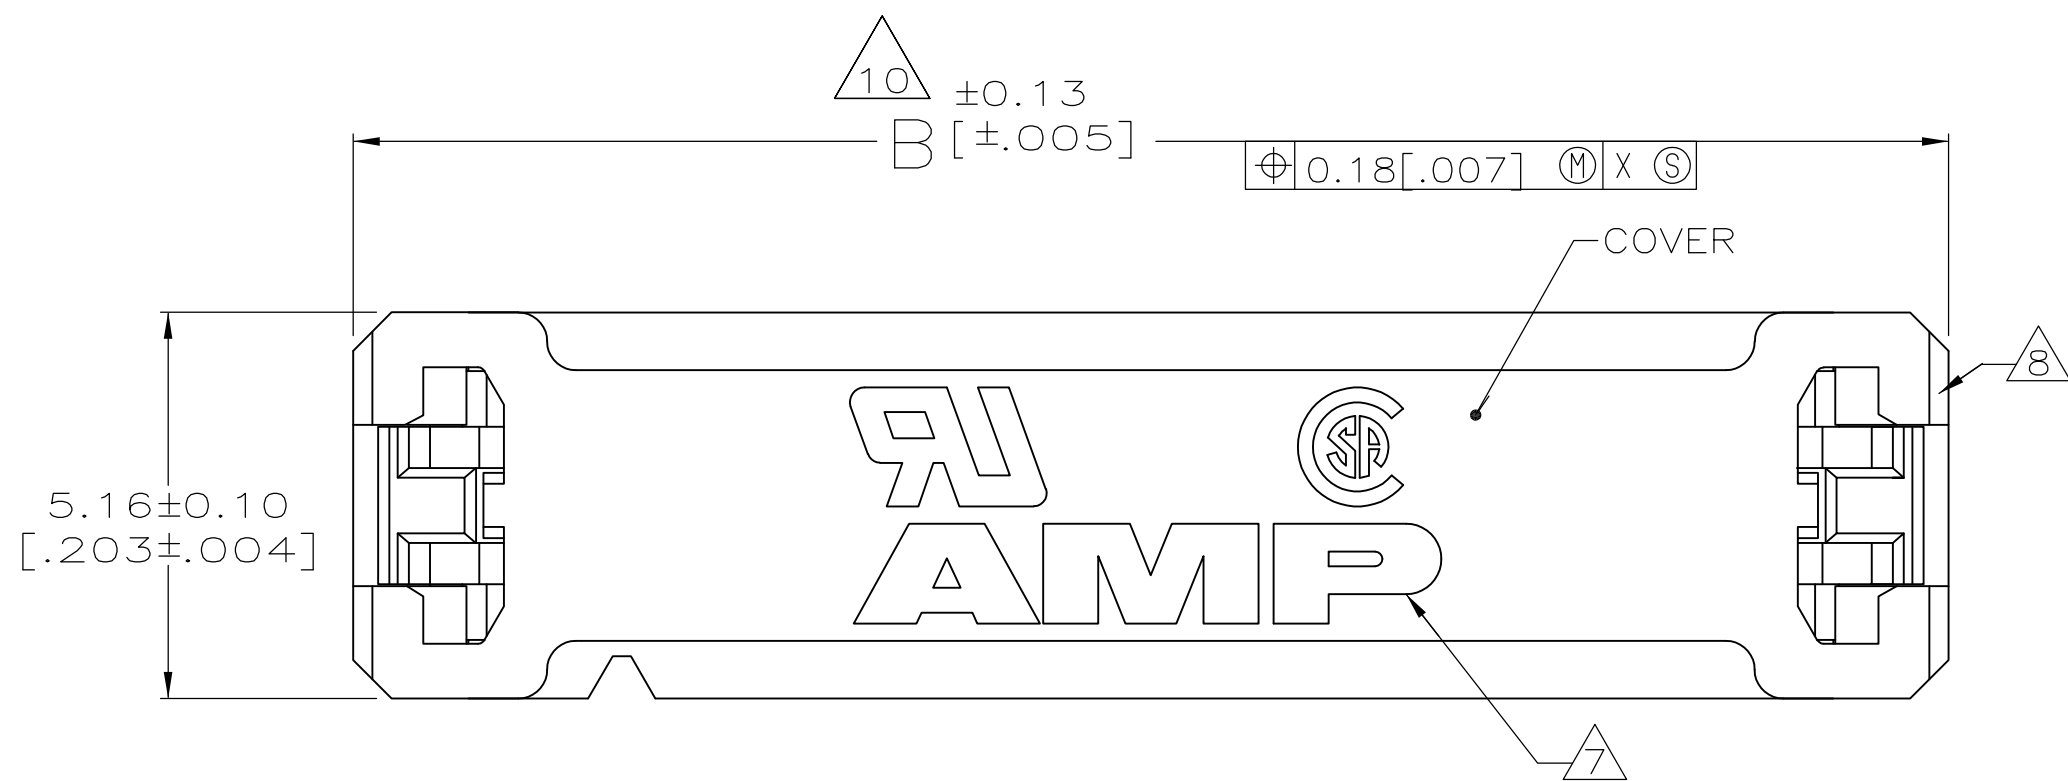

- 1. MOLDED PARTS: POLYESTER, UL RATED 94V-O, BLACK. CONTACTS: BERYLLIUM COPPER.
- 2. 2.54µm [.000100] MIN TIN-LEAD ON TERMINATION END, 0.76µm [.000030] MIN GOLD ON CONTACT AREA, ALL OVER 1.27µm [.000050] MIN NICKEL.
- 3. POSITION TOLERANCE APPLIES 0.76 [.030] ABOVE DATUM V.
- 4. POSITION NUMBER 1 INDICATOR.
- 5. ELECTRICAL ENGAGEMENT ZONE.
- 6. RECOMMENDED 28 AWG RIBBON CABLE, 0.61 - 0.97 [.024 - .038] THICK PVC, 1.0000[.03937] PITCH.
- 7. AMP LOGO ORIENTATION IS OPTIONAL.
- 8. RECESS ON EACH END, OPPOSITE CORNER.
- 9. 0.13µm [.000005] MIN GOLD ON TERMINATION END, 0.76µm [.000030] MIN GOLD ON CONTACT AREA, ALL OVER 1.27µm [.000050] MIN NICKEL.
- 10. MOLD GATE PROJECTION ON EITHER END OF COVER TO BE EXCLUDED FROM DIMENSION 'B' MEASUREMENT.


C

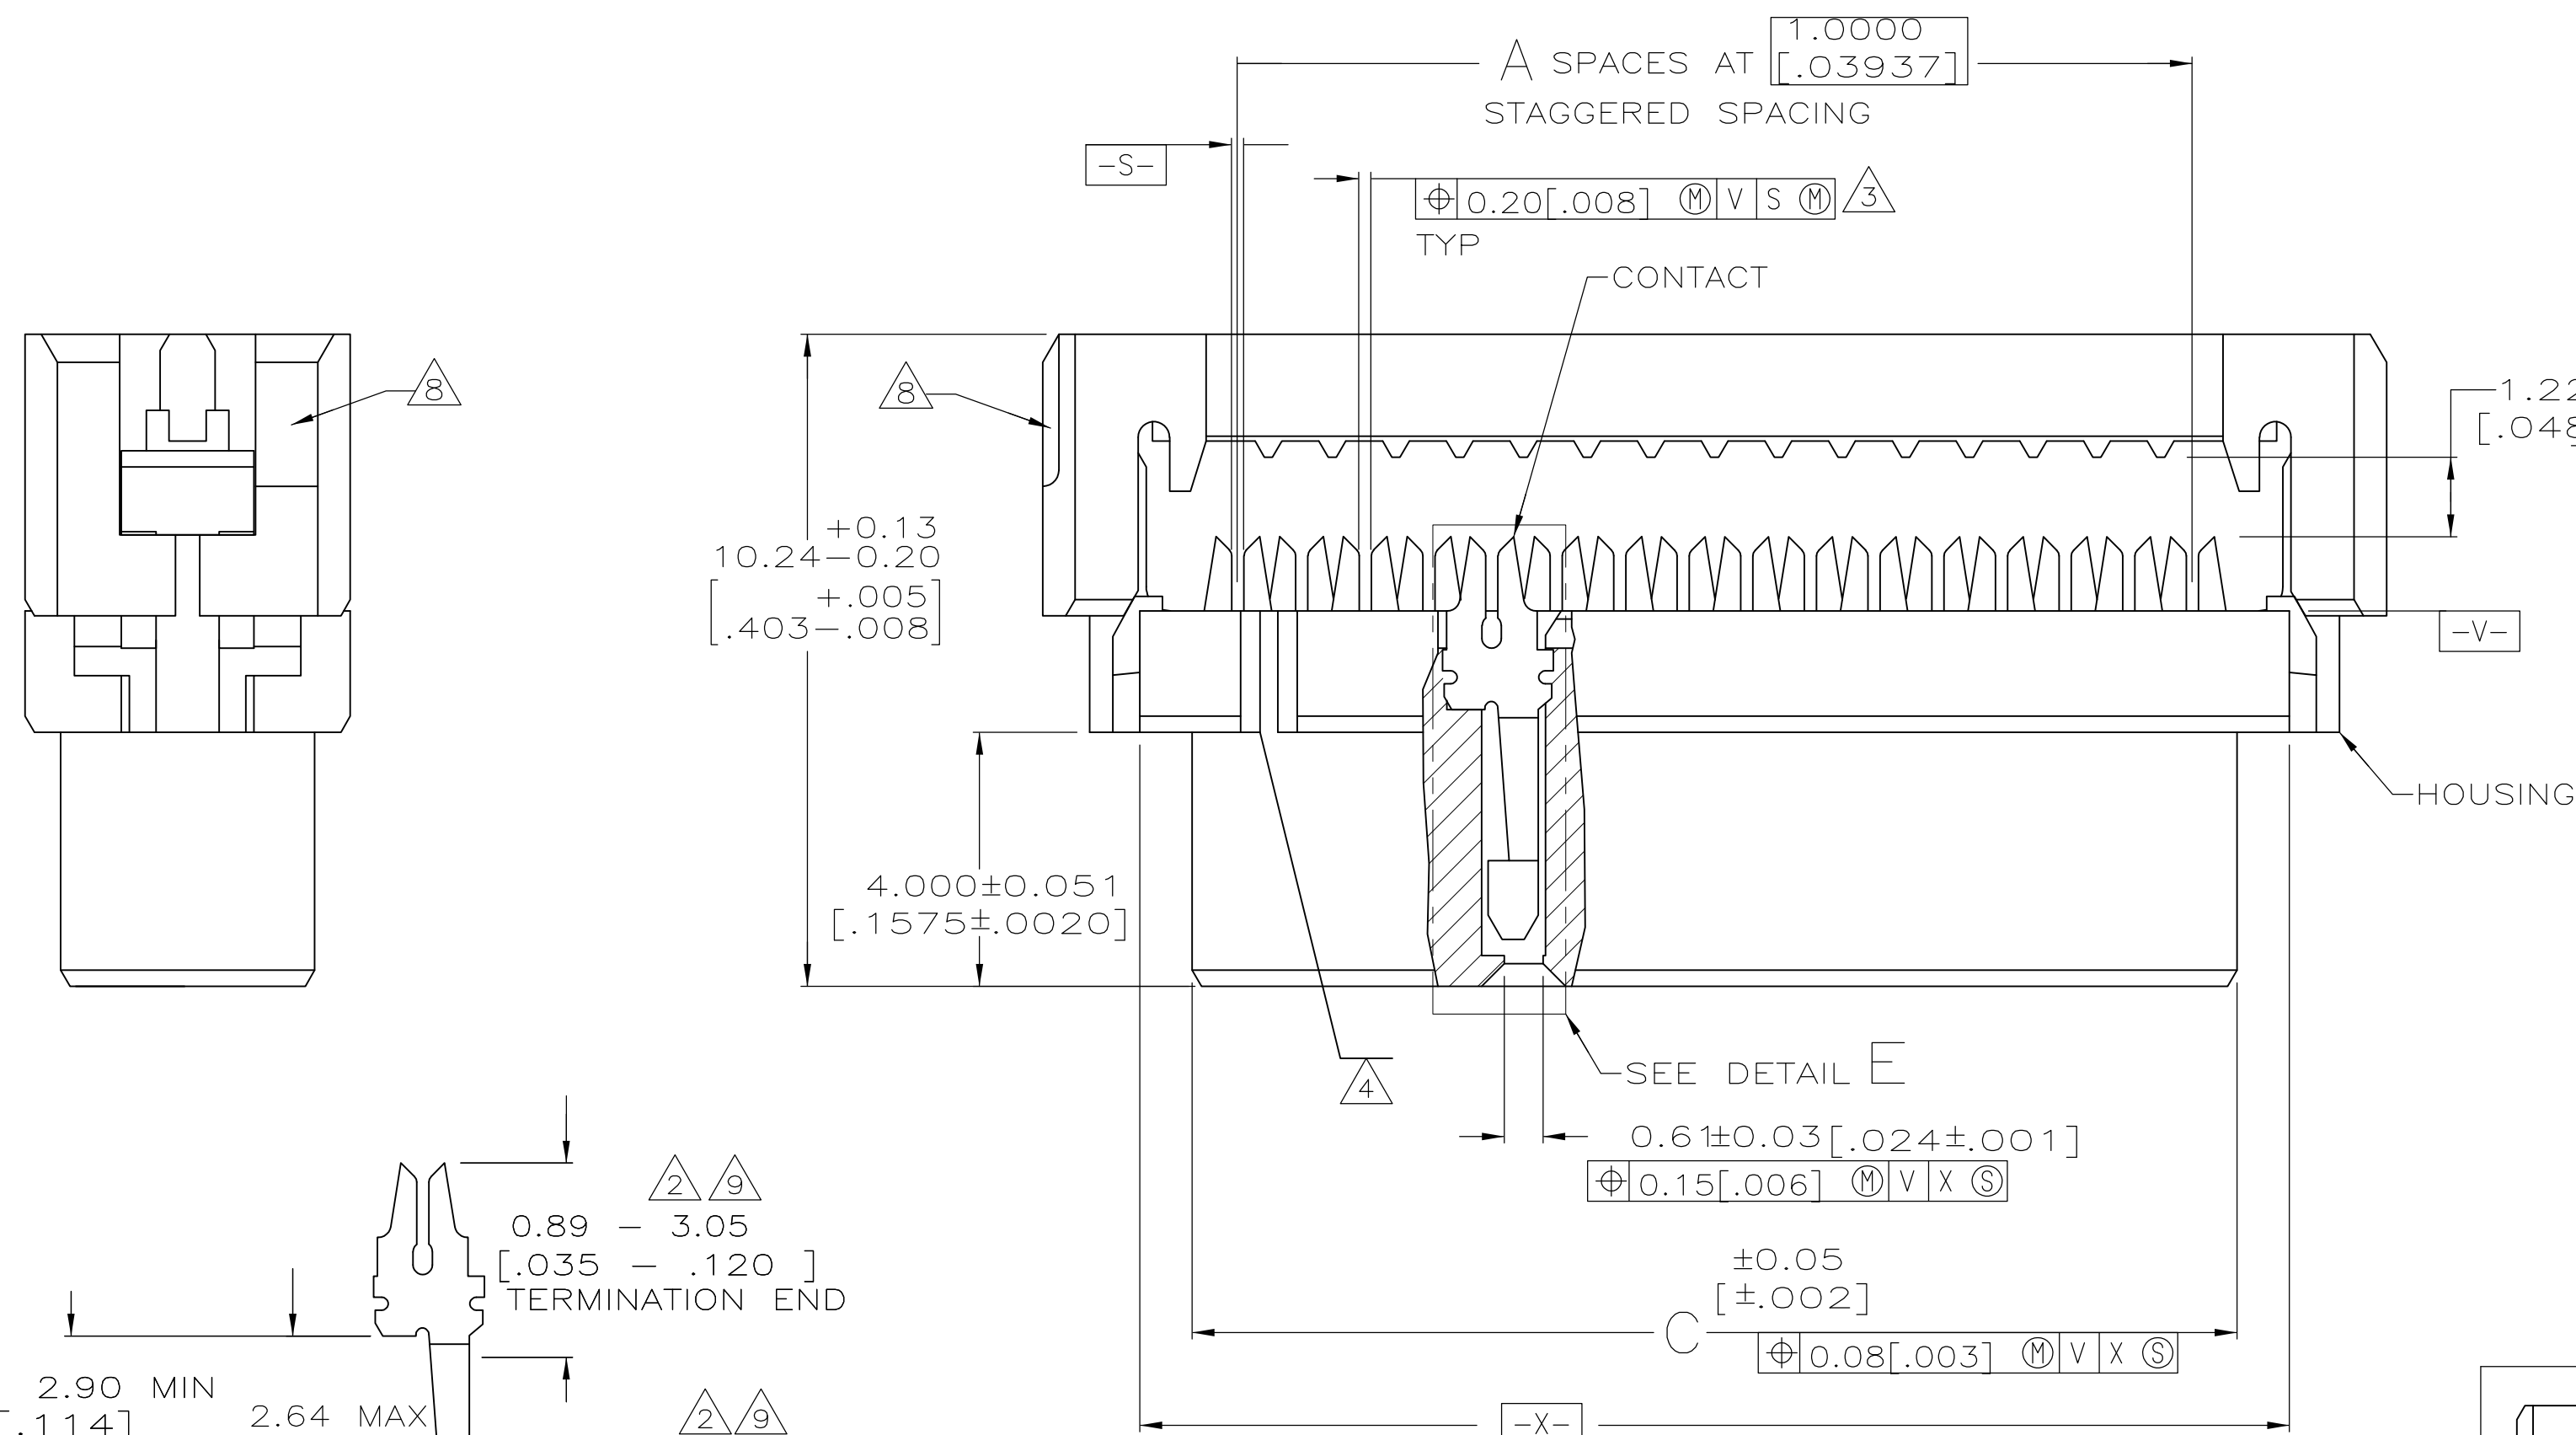


5
+0.20
1.54-0.13
+.008
.061-.005

TERMINATED VIEW
SCALE 5:1

B

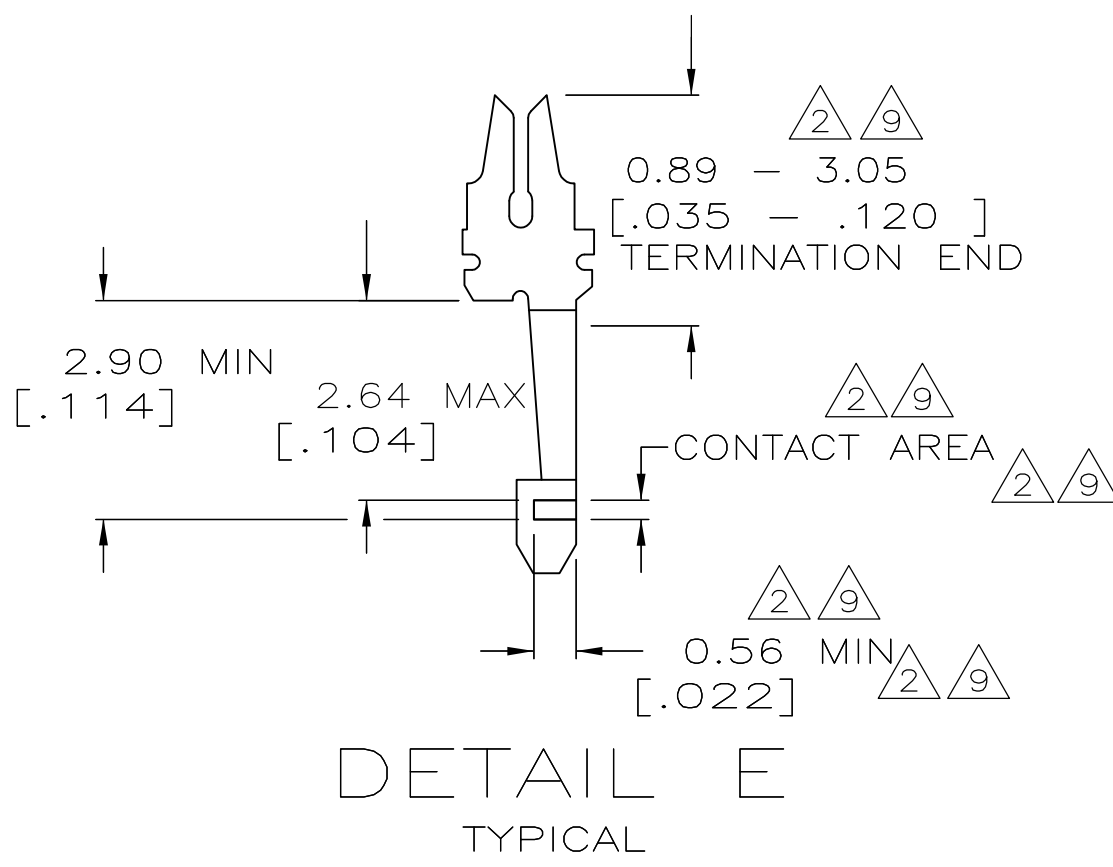

A

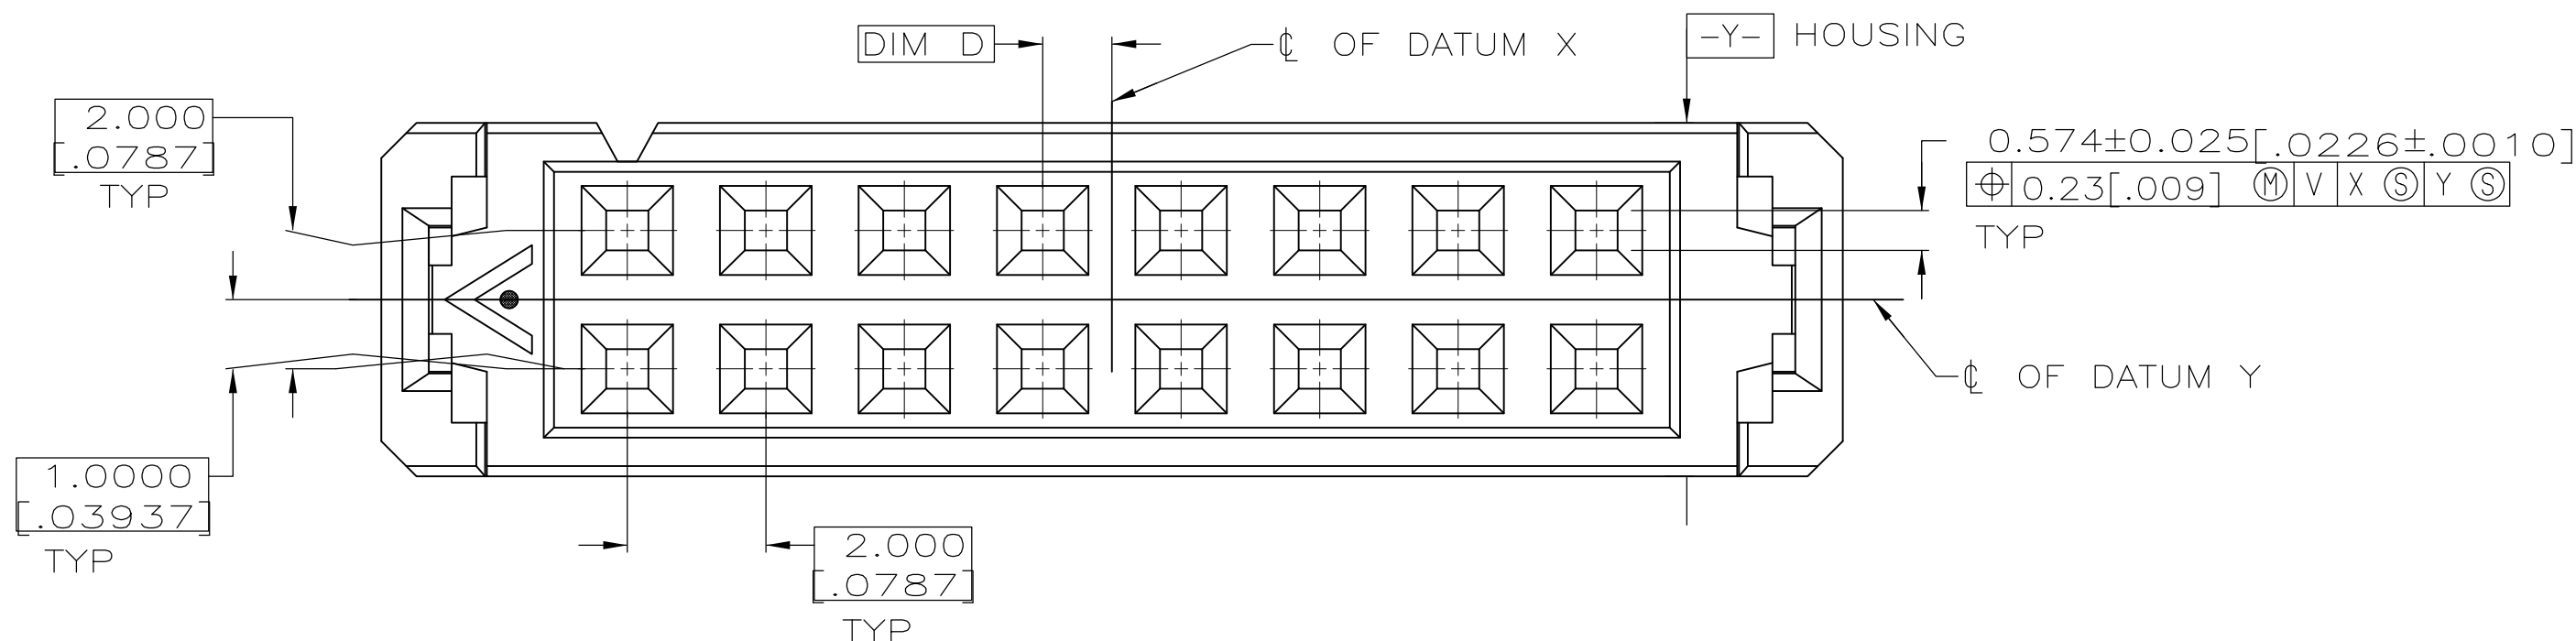

9	0.0000 [.00000]	26.42 [1.040]	31.17 [1.227]	25	26	2-111626-7
9	1.0000 [.03937]	24.41 [.961]	29.18 [1.149]	23	24	2-111626-6
9	1.0000 [.03937]	16.41 [.646]	21.18 [.834]	15	16	2-111626-5
9	1.0000 [.03937]	8.41 [.331]	13.18 [.519]	7	8	2-111626-4
9	0.0000 [.00000]	50.39 [1.984]	55.17 [2.172]	49	50	2-111626-3
9	1.0000 [.03937]	44.40 [1.748]	49.17 [1.936]	43	44	2-111626-2
9	1.0000 [.03937]	40.41 [1.591]	45.19 [1.779]	39	40	2-111626-1
9	0.0000 [.00000]	34.42 [1.355]	39.17 [1.542]	33	34	2-111626-0
9	1.0000 [.03937]	20.40 [.803]	25.17 [.991]	19	20	1-111626-9
9	0.0000 [.00000]	14.40 [.567]	19.18 [.755]	13	14	1-111626-8
9	0.0000 [.00000]	10.41 [.410]	15.16 [.597]	9	10	1-111626-7
OBSOLETE	2	1.0000 [.03937]	8.41 [.331]	7	8	1-111626-6
OBSOLETE	2	0.0000 [.00000]	22.40 [.882]	21	22	1-111626-5
OBSOLETE	2	1.0000 [.03937]	68.40 [2.693]	67	68	1-111626-4
OBSOLETE	2	1.0000 [.03937]	73.18 [2.881]	63	64	1-111626-3
OBSOLETE	2	1.0000 [.03937]	69.16 [2.536]	59	60	1-111626-2
OBSOLETE	2	0.0000 [.00000]	65.18 [2.378]	49	50	1-111626-1
	2	1.0000 [.03937]	55.17 [1.984]	43	44	1-111626-0
OBSOLETE	2	1.0000 [.03937]	49.17 [1.591]	39	40	111626-9
OBSOLETE	2	0.0000 [.00000]	45.19 [1.355]	33	34	111626-8
OBSOLETE	2	0.0000 [.00000]	39.17 [1.197]	29	30	111626-7
OBSOLETE	2	0.0000 [.00000]	35.18 [1.040]	25	26	111626-6
OBSOLETE	2	0.0000 [.03937]	31.17 [.961]	23	24	111626-5
OBSOLETE	2	1.0000 [.03937]	29.18 [.803]	19	20	111626-4
OBSOLETE	2	1.0000 [.03937]	25.17 [.646]	15	16	111626-3
OBSOLETE	2	0.0000 [.00000]	21.18 [.567]	13	14	111626-2
OBSOLETE	2	0.0000 [.00000]	19.18 [.410]	9	10	111626-1

CONTACT FINISH	D	C	B	A	NO OF POSN	PART NO
THIS DRAWING IS A CONTROLLED DOCUMENT.						
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		C. OBERMAN 02-24-92		
0 PLC ± -		1 PLC ± -		J. McCLINTON 3-9-92		
2 PLC ± 0.08 [.003]		3 PLC ± -		NAME		
4 PLC ± -		ANGLES ± -		PRODUCT SPEC		
MATERIAL		FINISH		APPLICATION SPEC		
1		9		SIZE CAGE CODE DRAWING NO		
				WEIGHT		
				A1 00779 111626		
				CUSTOMER DRAWING		
				SCALE 10:1 SHEET 1 OF 1 REV M2		