
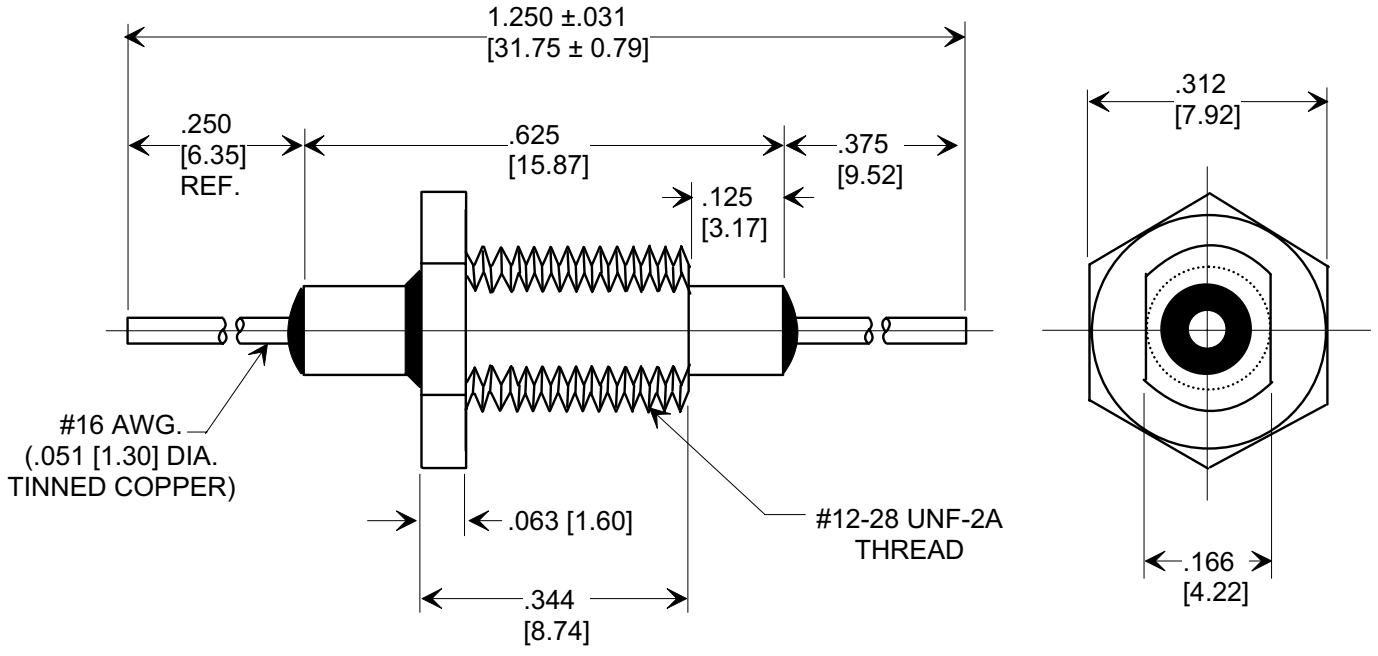



**MARKETING SALES DRAWING**

**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**  
**DIMENSIONS IN METRIC - [ ]**

Electrical Testing  
 per Tusonix standard  
 test plans and Mil-Std-202  
 Test Methods.



#16 AWG.  
 (.051 [1.30] DIA.  
 TINNED COPPER)

#12-28 UNF-2A  
 THREAD

MAXIMUM TIGHTENING TORQUE - 8 IN. LBS.

NOTE:  
 1. SUPPLIED WITH SILVER HEX NUT AND LOCKWASHER.

TUSONIX STYLE	321-010
CAP. VALUE	1000 pF
CAP. TOL.	± 20 %
TEMP. COEF.	X5U
VOLT. RATING	500 VDC
OPERATING TEMP. RANGE	-55 TO +85°C

X-2015 Rev-0  
**REVISION RECORD**  
 Original Release  
 C.O. 20010529-2-01  
**0**

**--TOLERANCES--**  
 Unless Otherwise Specified

**DECIMAL ±.015 [0.38]**

**ANGLES ±**

**TUSONIX**  
 TUCSON, ARIZONA

Title  
**FEED-THRU CAPACITOR**

Drawn L.E. 05-29-01 Scale 4 X

Approved B.Mc. 05-29-01

**A** 321-010-X5U0-102M