


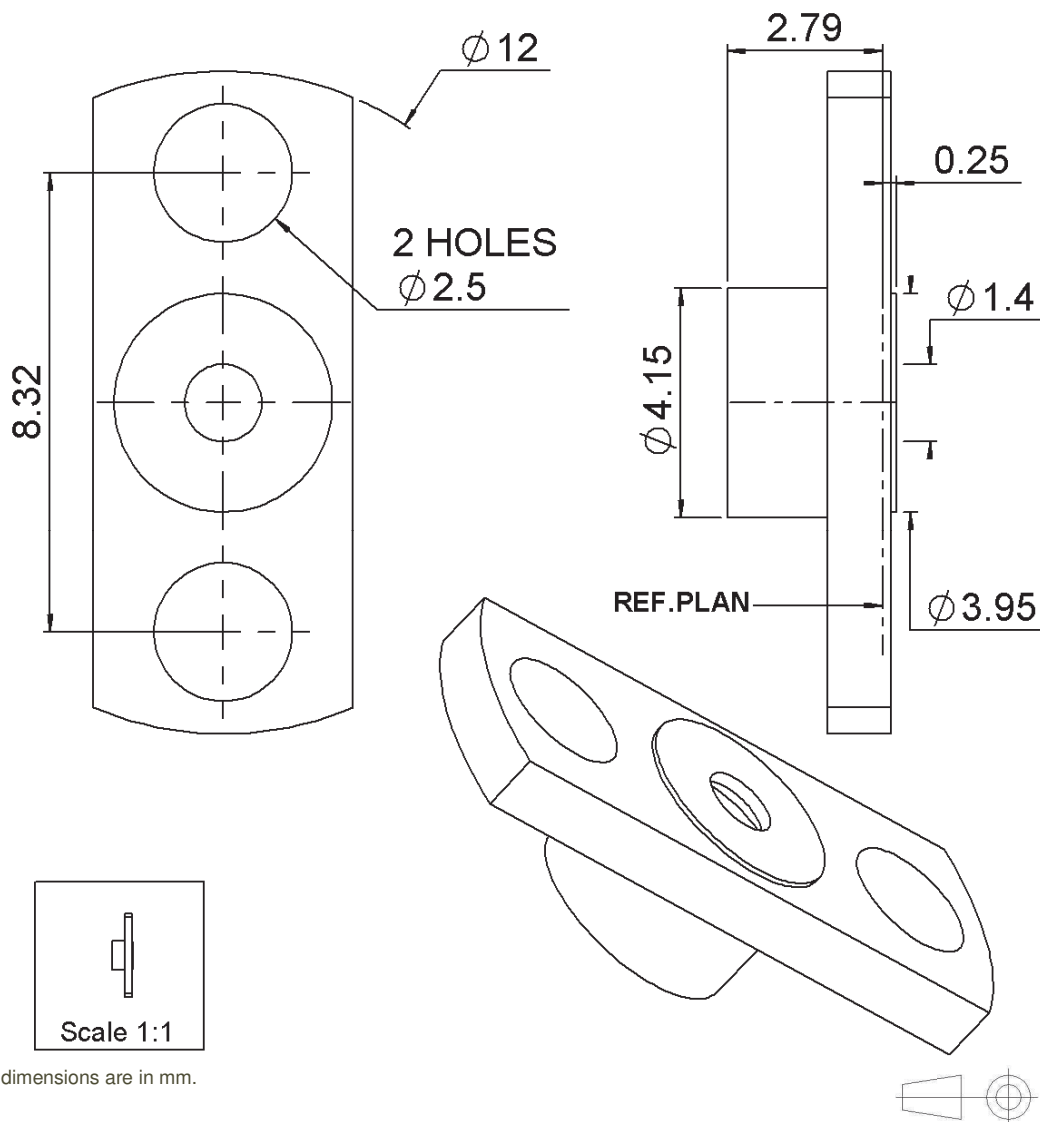

All dimensions are in mm.

COMPONENTS	MATERIALS	PLATING (μm)
Body	STAINLESS STEEL	PASSIVATED
Center contact	-	-
Outer contact	-	-
Insulator	-	-
Gasket	-	-
Others parts	-	-
-	-	-
-	-	-

PAGE 2/3

ISSUE **1334B**

SERIES **SMP**

PART NUMBER **R222450001**

PACKAGING

Standard	Unit	Other
100	Contact us	Contact us

ELECTRICAL CHARACTERISTICS

Impedance		NA	Ω
Frequency		NA	GHz
VSWR	NA +	0.0000	x F(GHz) Maxi
Insertion loss		NA	$\sqrt{F}$ (GHz) dB Maxi
RF leakage	- (	NA	- F(GHz)) dB Maxi
Voltage rating		NA	Veff Maxi
Dielectric withstanding voltage		NA	Veff mini
Insulation resistance		NA	M Ω mini

MECHANICAL CHARACTERISTICS

Center contact retention			
Axial force – Mating End		NA	N mini
Axial force – Opposite end		NA	N mini
Torque		NA	N.cm mini
Recommended torque			
Mating		NA	N.cm
Panel nut		NA	N.cm
Mating life		100	Cycles mini
Weight		0.4200	g

ENVIRONMENTAL

Operating temperature	-65/+165	°C
Hermetic seal	NA	Atm.cm3/s
Panel leakage	NA	

SPECIFICATION


OTHER CHARACTERISTICS

Assembly instruction:

Others:

ADDITIONAL INFORMATION MOUNTING INSTRUCTIONS

1. Check the quality of the soldering, as well as the position of the glass seal in the package .



2. Place the receptacle and pre-assemble screw on the package.

Mount the aligning tool R2821.860.020 into the flange to ensure a good concentricity.

Screw the receptacle on the package
Remove the aligning tool.

