


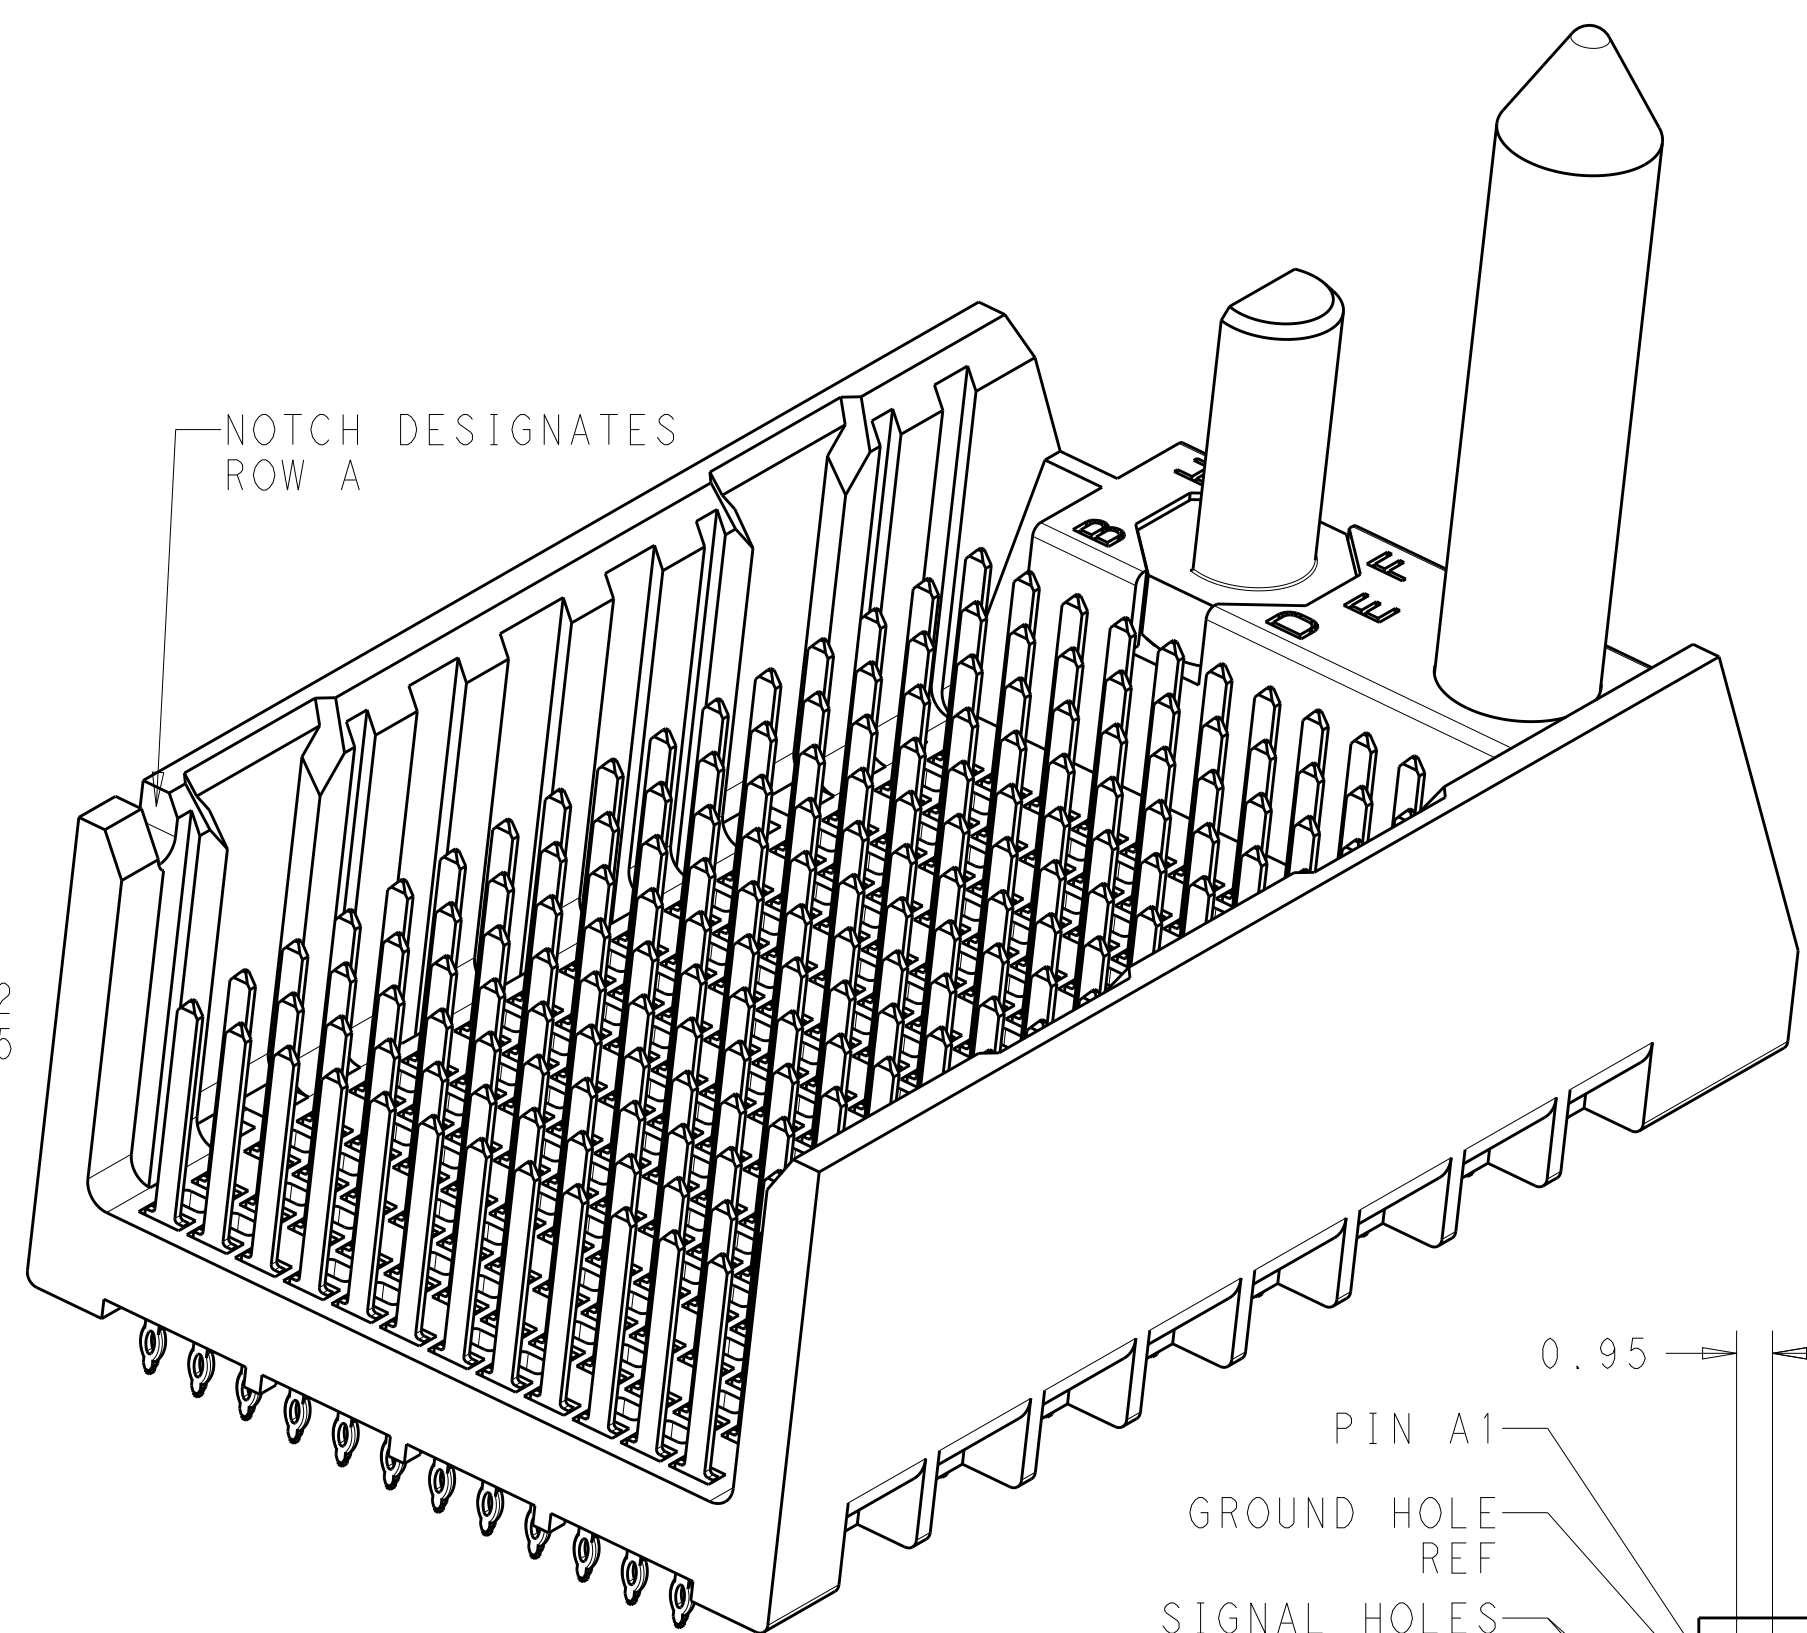

PIN A1
GROUND HOLE REF
SIGNAL HOLES REF


ROW A
ROW B
ROW C
ROW D
ROW E
ROW F
ROW G
ROW H
ROW J
ROW K
ROW L
ROW M

0.95
28.50
8.50
1.90 TYP
KEEP-OUT ZONE
2.95
20.8
11.42
14.85
1.35 TYP
4.75
 $\varnothing 3.56 \pm 0.08$
 $\oplus \varnothing 0.15$
UNPLATED SCREW HOLE $\triangle 4$

192X $\varnothing 0.46 \pm 0.05$
PLATED THRU HOLE

192X $\varnothing 0.55 \pm 0.013$
DRILL HOLE
 $\oplus \varnothing 0.10$

RIGHT GUIDED
BACKPLANE HOLE PATTERN
(CONNECTOR SIDE)

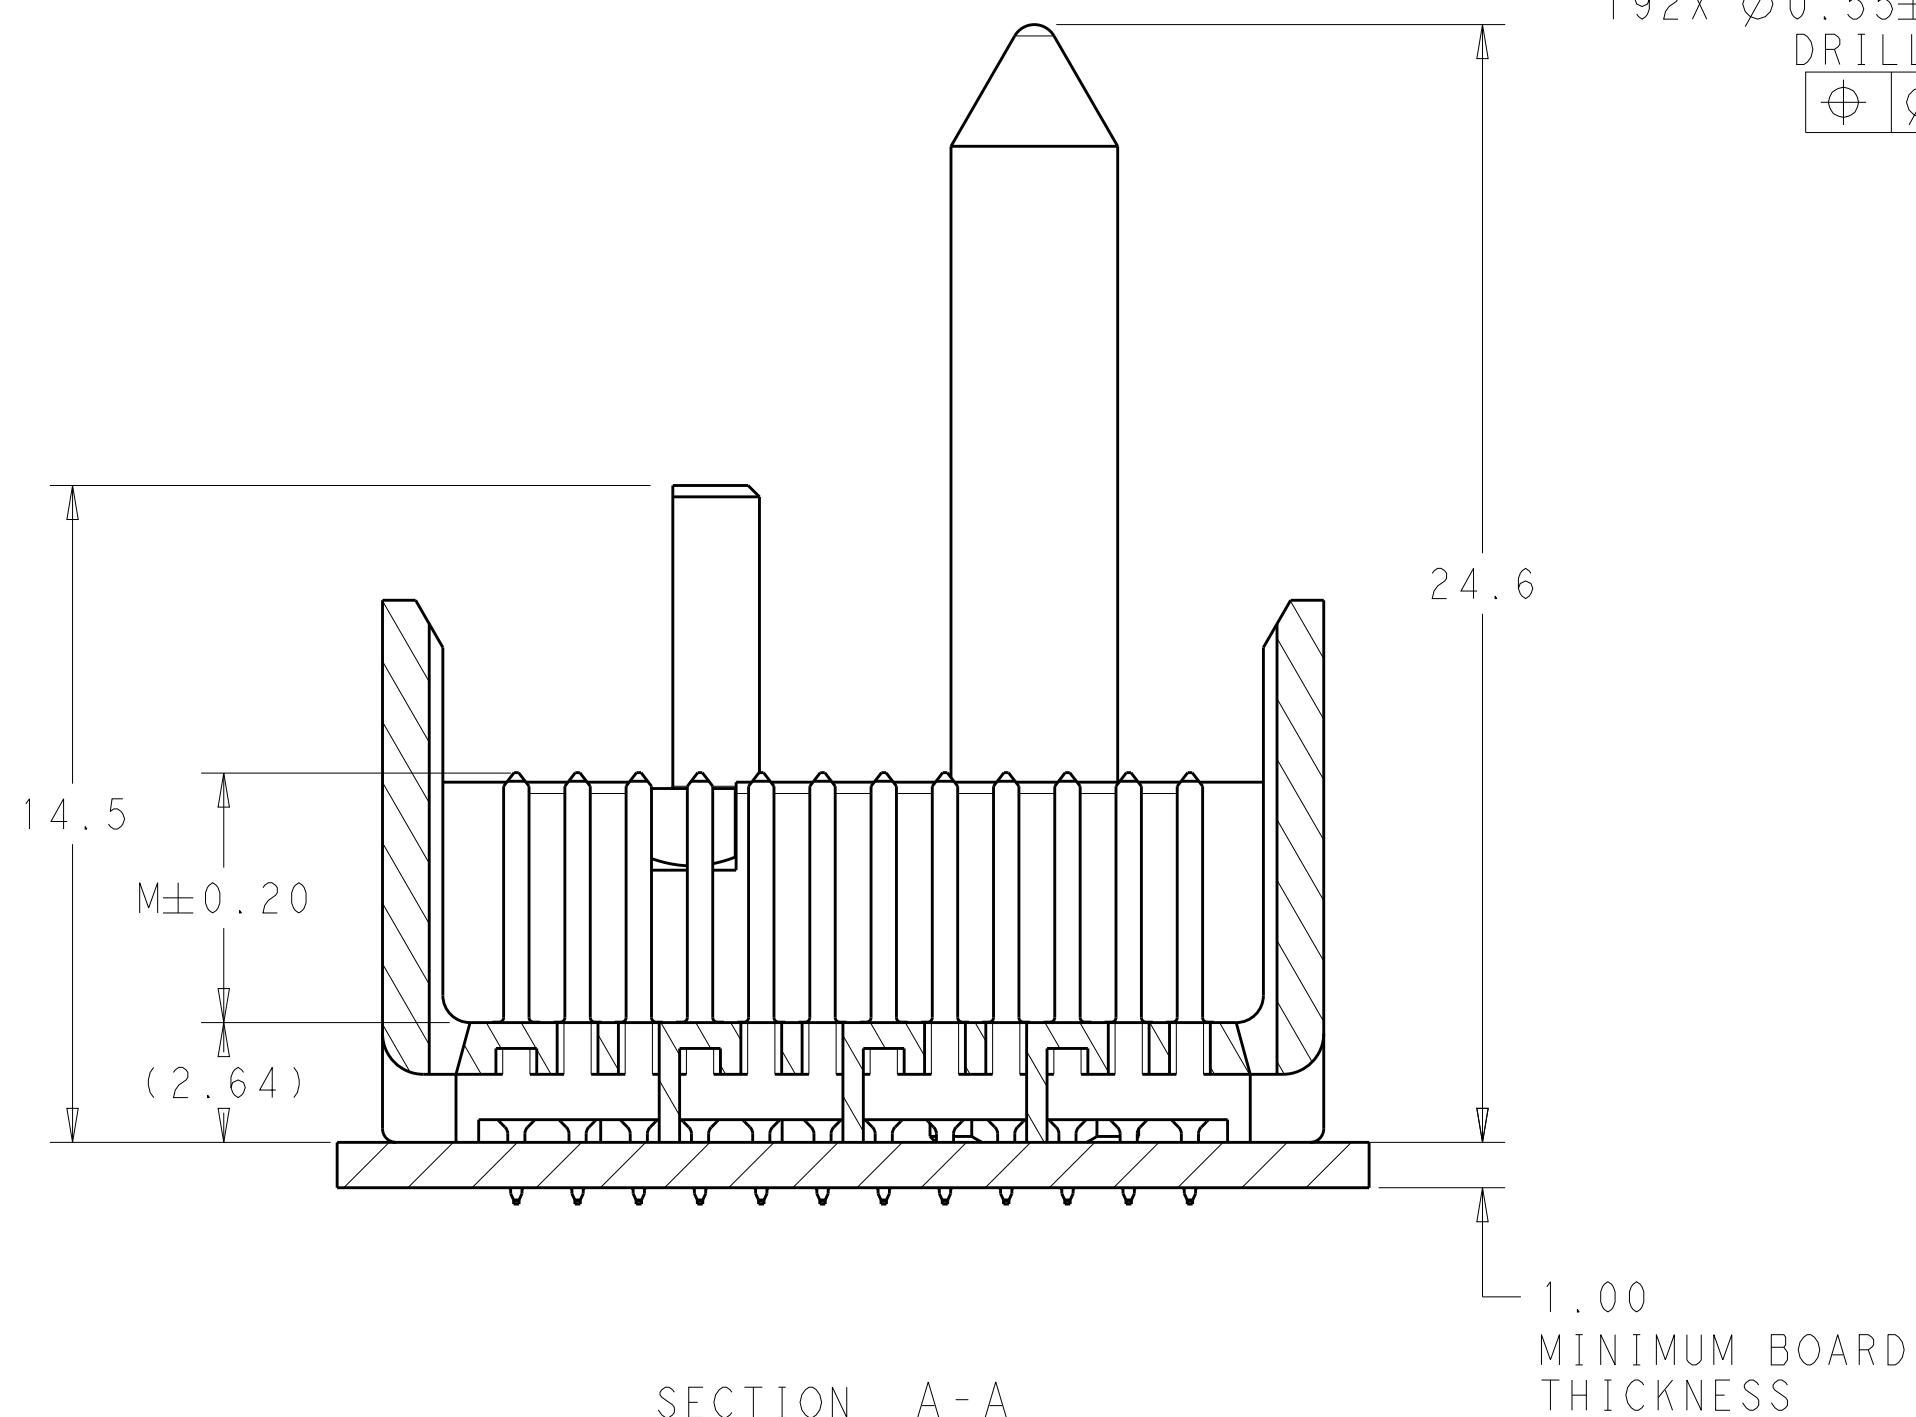
4805 (3/11)

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-


	H	5.5	8-2007828-3
	H	4.9	8-2007828-2
	H	4.5	8-2007828-1
	G	5.5	7-2007828-3
	G	4.9	7-2007828-2
	G	4.5	7-2007828-1
	F	5.5	6-2007828-3
	F	4.9	6-2007828-2
	F	4.5	6-2007828-1
	E	5.5	5-2007828-3
	E	4.9	5-2007828-2
	E	4.5	5-2007828-1
	D	5.5	4-2007828-3
	D	4.9	4-2007828-2
	D	4.5	4-2007828-1
	C	5.5	3-2007828-3
	C	4.9	3-2007828-2
	C	4.5	3-2007828-1
	B	5.5	2-2007828-3
	B	4.9	2-2007828-2
	B	4.5	2-2007828-1
	A	5.5	1-2007828-3
	A	4.9	1-2007828-2
	A	4.5	1-2007828-1
	-	5.5	2007828-3
	-	4.9	2007828-2
	-	4.5	2007828-1
FINISH	KEY POSITION	DIM M	PART NUMBER

REFER TO WWW.TE.COM
FOR PRODUCT AVAILABILITY


KEY POSITION
CHART




NONE




A




E




B




F




C



G



D



H