
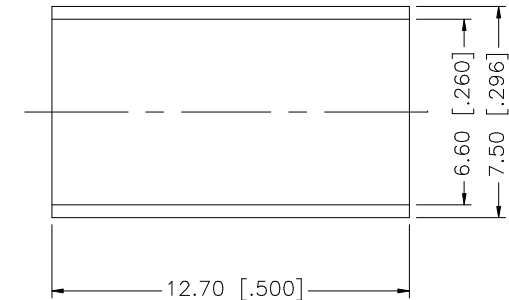
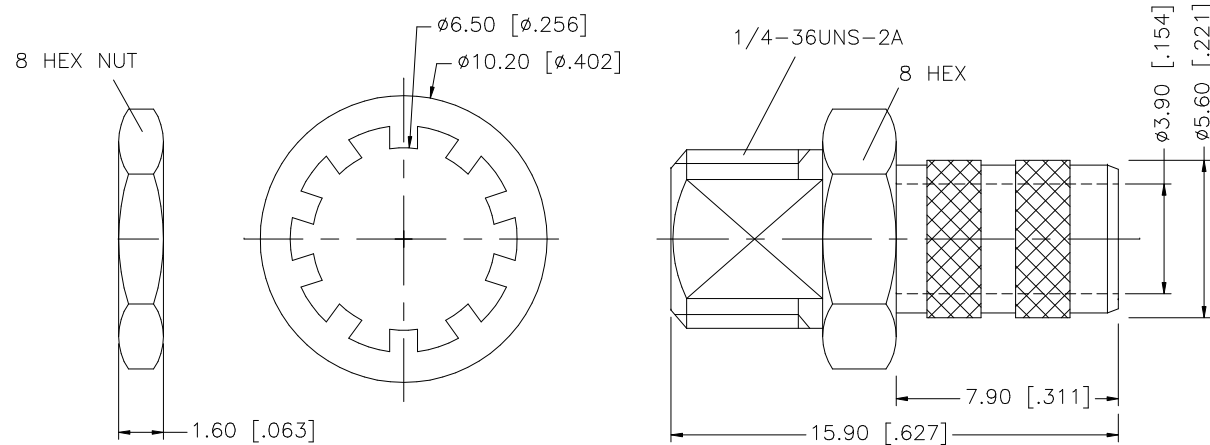



REV.	DATE	DESCRIPTION
NC	03/06/00	INITIAL RELEASE
A	12/15/05	UPDATE DRAWING FORMAT

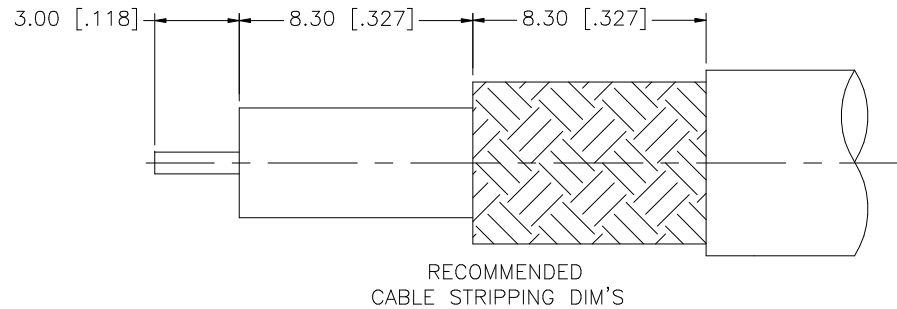

CRIMP NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE .255"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex							
8						DRAWN	G.R.S.								12/15/05
7						CHECKED			PART DESCRIPTION BULKHEAD CABLE TERMINATION (FOR RG–59/U, LMR240 CABLE)						
6						ISSUED									
5	FERRULE	COPPER	NICKEL	1		SHEET	1 OF 1		PART NO. 142273						
4	HEX NUT	BRASS	NICKEL	1											
3	LOCK WASHER	BRASS	NICKEL	1					DWG. NO. 142273.DWG REV. A SIZE A SCALE NA						
2	INSULATOR	TEFLON	NATURAL	1											
1	BODY	BRASS	NICKEL	1											
	DESCRIPTION	MATERIAL	FINISH	QTY			CAD FILE	C:/142/142273.DWG							