

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

REVISIONS


© COPYRIGHT - TE Connectivity Ltd.

ALL RIGHTS RESERVED.

P	LTR	DESCRIPTION	DATE	DWN	APVD
B		ECR-17-017011	20NOV2017	GSK	KN

NOTE:

- 1. PACKAGING ACC. TO TE SPEC.107-18032  
BUNDLE EVERY 25 ASSEMBLIES WITH A RUBBER BAND
- 3. ELECTRICAL TEST CONTAINING "SHORT CIRCUIT TEST, CONTINUITY  
AND ACCURATE CAVITY ASSIGNMENT TEST" ACC. TO TE-SPEC.108-18857, SUBSECTION 3.1.1
- ③ WIRING SCHEDULE AS SHOWN
- 4. ASSEMBLY IN COLORS BLACK AND WHITE
- ⑤ CABLES TO USE IN MEXICO FACTORY ONLY.

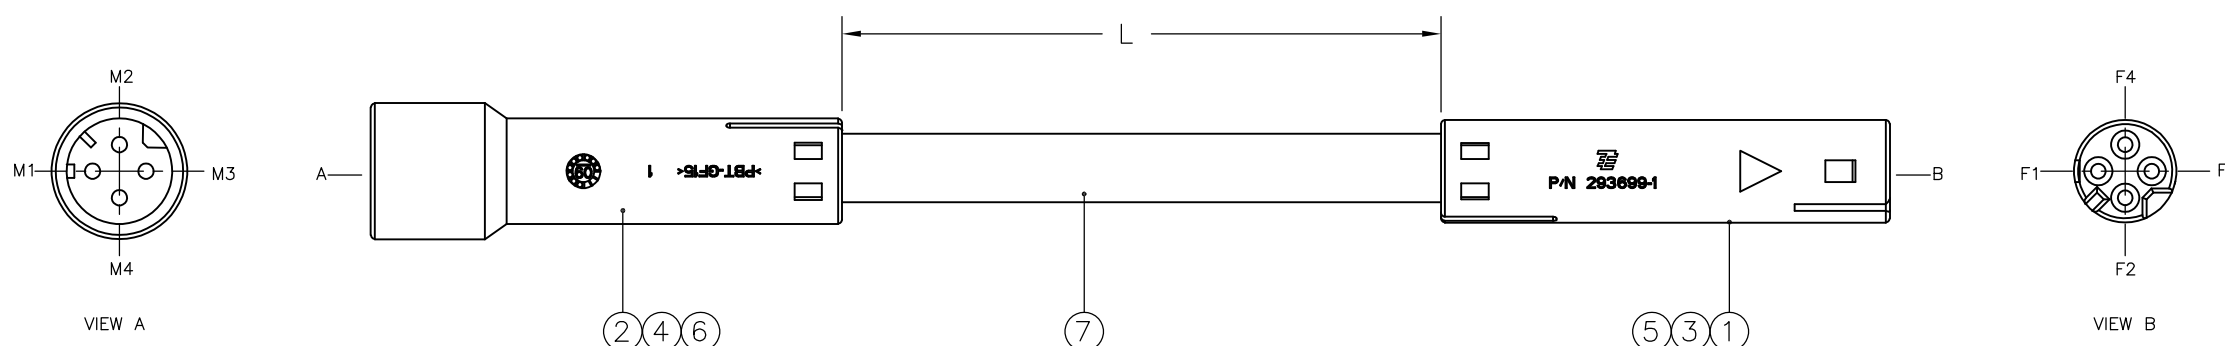

⑤	FT	L	-	CABLE AWC 8126 WHITE, 4/22AWG, UL 2464	9
	FT	-	L	CABLE AWC 8126 BLACK, 4X22AWG, UL 2464	8
	FT	L	-	CABLE LIYY 4xAWG22 UL 2464 WH	7
	FT	-	L	CABLE LIYY 4xAWG22 UL 2464 BK	
	PC	4	4	MICRO QUADLOK SYSTEM PIN CONTACT	6
	PC	4	4	MICRO QUADLOK SYSTEM SOCKET CONTACT	5
	PC	1	1	4 POS. LOW VOLTAGE CONN.M.POSITIONER	4
	PC	1	1	4 POS. LOW VOLTAGE CONN.F.POSITIONER	3
	PC	-	1	4 POS. LOW VOLTAGE MALE CONN.HSG BK	2
	PC	1	-	4 POS. LOW VOLTAGE MALE CONN.HSG WH	
	PC	-	1	4 POS. LOW VOLTAGE REC.CONN.HSG BK	1
	PC	1	-	4 POS. LOW VOLTAGE REC.CONN.HSG WH	
	UOM	QTY	QTY	DESCRIPTION	POS.
		2--X	1--X		

WIRING SCHEDULE ③

SIDE A	COLOR	SIDE B
M1	BN	F1
M2	RD	F2
M3	OG	F3
M4	BK	F4

	PN	L/ft	TOLERANCES/ft
	X-2083136-1	2	+/-0.01
	X-2083136-2	4	+/-0.02
OBSOLETE	X-2083136-3	8	+/-0.03
OBSOLETE	X-2083136-4	12	+/-0.05

THIS DRAWING IS A CONTROLLED DOCUMENT.	
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± -
	1 PLC ± -
	2 PLC ± -
	3 PLC ± -
	4 PLC ± -
	ANGLES ± -
MATERIAL	FINISH
-	-

DWN SATHISH KUMAR.G 25FEB11	TE Connectivity			
CHK R.HOSSAINI 02MAR11				
APVD R.HOSSAINI 02MAR11	NAME CABLE ASSEMBLY NECTOR S LINE UL 4 POS., MALE TO FEMALE			
PRODUCT SPEC	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
APPLICATION SPEC			A3 00779 C-2083136	
WEIGHT	CUSTOMER DRAWING		SCALE	SHEET
			NTS	1 OF 1
				REV B