SERIES RP8100 SWITCHES

PUSHBUTTON SWITCHES - ROUND ILLUMINATED



SPECIFICATIONS	
Contact Rating:	125mA @ 125 VAC 100mA @ 50 VDC
Life Expectancy (Electri	cal): 500,000 cycles at full load
Contact Resistance:	50 mΩ max (initial)
Insulation Resistance:	1,000 MΩ min. @ 500VDC
Dielectric Strength:	1,000 VAC rms.
Operating Force:	350 gf ±150 gf

10ms MAX

1.5mm

Operating Temperature: -30°C to +85°C

Contact Bounce:

Travel:


FEATURES & BENEFITS

- ▶ Threaded or snap in panel mount
- Extended Operating life-500k cycles Audio
- ▶ LED illuminated option
- ▶ Sealed to IP67

APPLICATIONS/MARKETS

- ► Telecommunications
- ► Appliance
- ► Instrumentation
- ► Consumer Electronics

MATERIALS		
Housing:	Nylon	
Button:	Nylon	
Terminal Case:	Thermo plastic	
Terminals:	Copper alloy, plated	
Contact:	Copper alloy, plated	

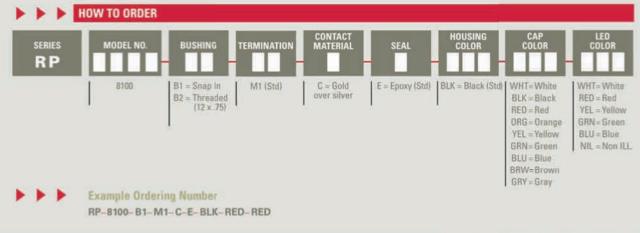

Specifications subject to change without notice.


Fax: 763-531-8235


Phone: 800-867-2717


RP 8100

THREADED








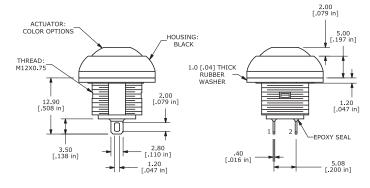


RP 8100

SNAP-IN





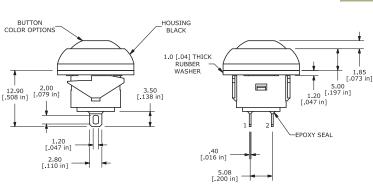

Ø 13.60 [.535]

PANEL MOUNTING


SERIES RP8100 SWITCHES


PUSHBUTTON SWITCHES - ILLUMINATED


RP 8100

LED THREADED








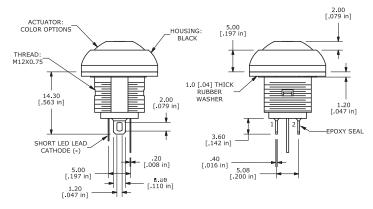



RP 8100

LED SNAP-IN







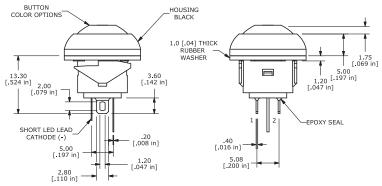

106

Phone: 800-867-2717 Fax: 763-531-8235