


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1390050	2013-08-28	Micky	Add Certification Information





△ QC Laser Mark:
 YYYY = Year
 WW = Week


④ Unlock Tool
 △ Part number: ULT-JOIN01

△ Cable Joiner Housing Part Number
 CX-00B0M32-700X

M32x1.0

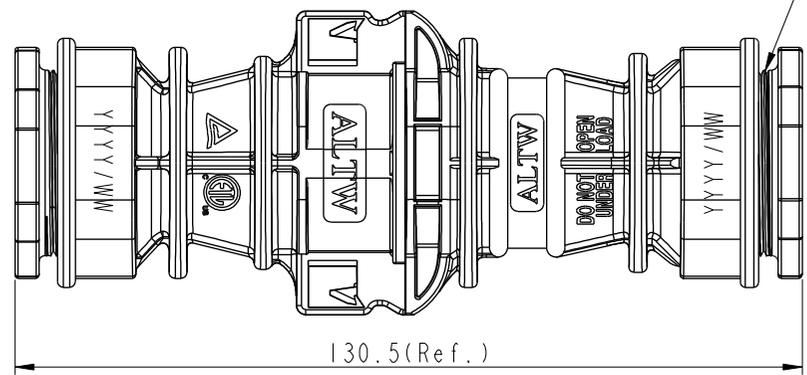


* Recommended sealing Nut torque
 Minimum: 25Kgf-cm



Note:
 * Waterproof Rate: IP67
 * Connector: PPE, Black (UL94-V0 FI)
 * Butt Pin: Copper alloy
 * Gasket: Silicon, Gray
 * Disassembly-Using the Unlock tool.
 * Operating Temperature: -40~+105°C
 * Withstanding Voltage: 6KV
 * Pollution Degree: III
 * Cable OD Range: 12mm~10mm
 * Avoid oil and gasoline

△ * CX-00B0M32-700X
 UL 6703A & TUV 2pfg 1915

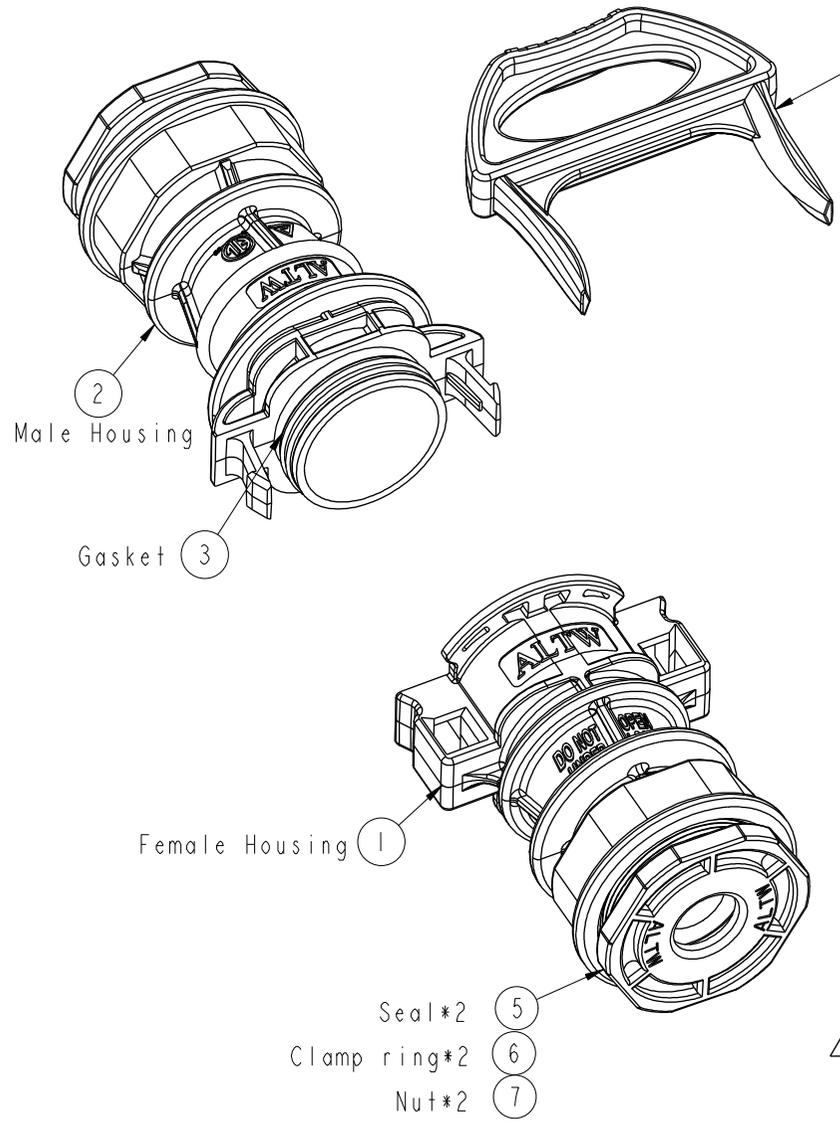

UNIT:mm		TITLE	Cable joiner Cable OD Range: 12mm~10mm		
TOLERANCE .X	±0.50	SCALE	4:5	SIZE	A4
		REV.	B	WC-REV.	B.1
				QC	Inspection item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	CX-00B0M32-7002	DRAWN BY	Micky	DATE	2013-08-28
DWG NO	CX-00B0M32-7002	CHECKED BY	Benson	DATE	2013-08-28
CUSTOMER	ALTW	APPROVED BY	Victor	DATE	2013-08-28