

Dialight

657 Series

Domed & Flat LED Watertight 11/16" Mounting Hole Panel Mount Indicators



FEATURES / BENEFITS

- ▲ IP67 / NEMA 4X
- ▲ Cool-to-the-touch Operation
- ▲ Resistant to shock and vibration
- ▲ Lens Option:
 - Low Profile Flat
 - Wide Angle Domed
- ▲ RoHS compliant
- ▲ Anti-Capillary Wire
- ▲ LED Technology engineered for up to 100k hours of operation


APPLICATIONS

- ▲ Electrical Control Panels
- ▲ Wastewater Treatment Controls
- ▲ Dashboards:
 - Buses and transit vehicles
 - Agricultural and construction equipment
 - Aircraft and military vehicles
- ▲ Status Indication on Industrial Equipment



SPECIFICATIONS

- ▲ Operating Voltage - 5, 12, 24 VDC
- ▲ Operating temperature -35° C to + 65° C
- ▲ Storage temperature -40° C to +100° C
- ▲ Front Mounting in 11/16" clearance hole
- ▲ IP67 / NEMA 4X
- ▲ Lead wire – 18 AWG anti-capillary, standard
- ▲ Available in Red, Yellow, Green, Blue, Orange and White
- ▲ Mounting Torque - 15in Lbs.
- ▲ Lens Material UV Stabilized Polycarbonate 94-VO
- ▲ Max Panel Thickness - .350"


DOMED LENS

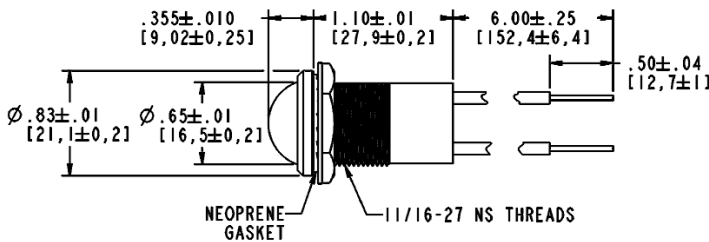

FLAT LENS

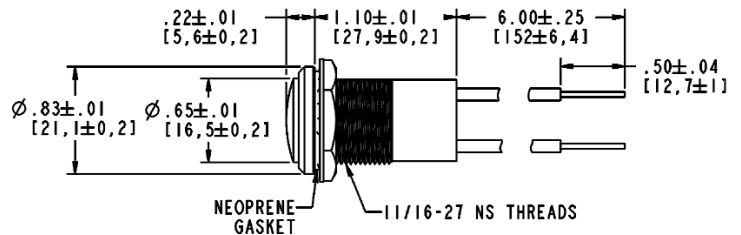

MAX. PANEL THICKNESS: .350
MIN. SPACING ϕ TO ϕ : 1.000



RECOMMENDED MOUNTING HOLE

Dimensions in inches [mm]



PART NUMBERS - FLAT LENS VERSION

| Part Number | Lens Style | Lamp Color | Voltage (VDC) | Lens Color | Typ. Current (mA) | Typ Luminance (fL) |
|---------------|------------|------------|---------------|-----------------|-------------------|--------------------|
| 657-1502-103F | Flat | Red | 5 | Tinted Diffused | 20 | 350 |
| 657-1503-103F | Flat | Red | 12 | Tinted Diffused | 20 | 350 |
| 657-1504-103F | Flat | Red | 24 | Tinted Diffused | 20 | 350 |
| 657-1602-103F | Flat | Green | 5 | Tinted Diffused | 20 | 350 |
| 657-1603-103F | Flat | Green | 12 | Tinted Diffused | 20 | 350 |
| 657-1604-103F | Flat | Green | 24 | Tinted Diffused | 20 | 350 |
| 657-1702-103F | Flat | Yellow | 5 | Tinted Diffused | 20 | 350 |
| 657-1703-103F | Flat | Yellow | 12 | Tinted Diffused | 20 | 350 |
| 657-1704-103F | Flat | Yellow | 24 | Tinted Diffused | 20 | 350 |
| 657-1802-103F | Flat | Blue | 5 | Tinted Diffused | 20 | 125 |
| 657-1803-103F | Flat | Blue | 12 | Tinted Diffused | 20 | 125 |
| 657-1804-103F | Flat | Blue | 24 | Tinted Diffused | 20 | 125 |
| 657-1902-103F | Flat | Orange | 5 | Tinted Diffused | 20 | 475 |
| 657-1903-103F | Flat | Orange | 12 | Tinted Diffused | 20 | 475 |
| 657-1904-103F | Flat | Orange | 24 | Tinted Diffused | 20 | 475 |
| 657-1002-303F | Flat | White | 5 | White Diffused | 20 | 100 |
| 657-1003-303F | Flat | White | 12 | White Diffused | 20 | 100 |
| 657-1004-303F | Flat | White | 24 | White Diffused | 20 | 100 |
| 657-2502-103F | Dome | Red | 5 | Tinted Diffused | 20 | 400 |
| 657-2503-103F | Dome | Red | 12 | Tinted Diffused | 20 | 400 |
| 657-2504-103F | Dome | Red | 24 | Tinted Diffused | 20 | 400 |
| 657-2602-103F | Dome | Green | 5 | Tinted Diffused | 20 | 400 |
| 657-2603-103F | Dome | Green | 12 | Tinted Diffused | 20 | 400 |
| 657-2604-103F | Dome | Green | 24 | Tinted Diffused | 20 | 400 |
| 657-2702-103F | Dome | Yellow | 5 | Tinted Diffused | 20 | 400 |
| 657-2703-103F | Dome | Yellow | 12 | Tinted Diffused | 20 | 400 |
| 657-2704-103F | Dome | Yellow | 24 | Tinted Diffused | 20 | 400 |
| 657-2802-103F | Dome | Blue | 5 | Tinted Diffused | 20 | 175 |
| 657-2803-103F | Dome | Blue | 12 | Tinted Diffused | 20 | 175 |
| 657-2804-103F | Dome | Blue | 24 | Tinted Diffused | 20 | 175 |
| 657-2902-103F | Dome | Orange | 5 | Tinted Diffused | 20 | 675 |
| 657-2903-103F | Dome | Orange | 12 | Tinted Diffused | 20 | 675 |
| 657-2904-103F | Dome | Orange | 24 | Tinted Diffused | 20 | 675 |
| 657-2002-303F | Dome | White | 5 | White Diffused | 20 | 100 |
| 657-2003-303F | Dome | White | 12 | White Diffused | 20 | 100 |
| 657-2004-303F | Dome | White | 24 | White Diffused | 20 | 100 |

Dialight reserves the right to make changes at any time in order to supply the best product possible.

The most current version of this document will always be available at:

http://www.dialight.com/Assets/Brochures_And_Catalogs/Indication/MDEL657DF001.pdf

MDEL657DF001_C